



SOUND TOWN

SOUND TOWN INC.
Add.: 376 Lemon creek Dr., Suite C, Walnut, CA 91789, USA Tel: +1 323-618-0688
Email: support@soundtown.com
www.soundtown.com



ZETHUS SERIES

PROFESSIONAL LINE ARRAY SYSTEM



ZETHUS-205V2

PASSIVE



ZETHUS-205WV2



FEATURES

- * Dual 5" passive full range line array speaker.
- * 2 x 5" LF, 1.4" titanium compression driver.
- * High grade plywood with quality texture coating available in black and white.
- * Fit with ZETHUS-115S subwoofer.
- * Used in small and mid-size live sound venues, permanent installation in clubs,

ballrooms, restaurants, houses of worship, convention centres, live theatres etc.

SPECIFICATIONS

ZETHUS-205V2 / ZETHUS-205WV2 SYSTEM DATA: FREQUENCY RESPONSE: 70 Hz - 18k Hz SENSITIVITY 98 db SPL MAX: 125 db DISPERSION: 90° x 15° (H x V)

LOUDSPEAKER DATA: Compact dual 5" full range passive line array loudspeaker CONFIGURATION: TRANSDUCER: LF: 2 x 5", HF: 1 x 1.4" diaphragm titanium compression driver IMPEDANCE: 16Ω Nominal POWER HANDLING 200 / 400W CONNECTORS: 2 x 4 Pin Speakon® PHYSICAL:

CABINET CONSTRUCTION: High grade 100% birch plywood


MOUNTING: Compact line array hardware / Optional U bracket FINISH: Texture coating (RAL colors available)


GRILL AND RIGGING COMPONENT: Steel with anti-corrosion coat

DIMENSIONS (MM / INCH): 531 W - 303 D - 188 H / 20.9 W - 11.9 D - 7.4 H

12.5 kg / 27.6 lbs

SPL / IMPEDANCE VS FREQ.





www.soundtown.com 1 Email: support@soundtown.com

ZETHUS-208BV2 ZETHUS-208BPW

PASSIVE

ACTIVE



ZETHUS-208WV2 ZETHUS-208WPW

PASSIVE

SPECIFICATIONS

ACTIVE



FEATURES

- * Dual 8" passive / active full range line array speaker.
- * 2 x 8" LF, 1.75" titanium compression driver.
- * Passive model Bi-amp / Full range switchable.
- * Active model built-in Class D amp. w/ onboard DSP
- * High grade plywood with quality texture coating avaliable in black and white.
- * Fit with ZETHUS-115S/218S (SPW) subwoofer.
- * Used in small and mid-size live sound venues, permanent installation in clubs, ballrooms, restaurants, houses of worship, convention centres, live theatres etc.

ZETHUS-208BV2 / ZETHUS-208WV2 MODEL: ZETHUS-208BPW / ZETHUS-208WPW SYSTEM DATA: FREQUENCY RESPONSE: 60 Hz - 19k Hz 60 Hz - 19k Hz SENSITIVITY 101 db 101 db SPL MAX: 128 db 128 db DISPERSION: 90° x 15° (H x V) 90° x 15° (H x V) LOUDSPEAKER DATA: CONFIGURATION: Compact dual 8" active full range line array Compact dual 8" passive full range line array TRANSDUCER: LF: 2 x 8", HF: 1 x 1.75" titanium diaphragm LF: 2 x 8", HF: 1 x 1.75" titanium diaphragm IMPEDANCE: Full range: 16Ω ; Bi-amp: LF: 16Ω , HF: 8Ω 40 POWER HANDLING 350 / 700W 350 / 700W 2 x 4 Pin Speakon® CONNECTORS: PHYSICAL: CABINET CONSTRUCTION: High grade 100% birch plywood High grade 100% birch plywood MOUNTING: Compact line array hardware / Optional U bracket Compact line array hardware / Optional U bracket FINISH: Texture coating (RAL colors available) Texture coating (RAL colors available) GRILL AND RIGGING COMPONENT: Steel with anti-corrosion coat Steel with anti-corrosion coat DIMENSIONS (MM / INCH): 671 W - 344 D - 247 H / 26.4 W - 13.5 D - 9.7 H 671 W - 344 D - 247 H / 26.4 W - 13.5 D - 9.7 H WFIGHT: 19 kg / 42 lbs 18 kg / 40 lbs AMPLIFIER: Class-D amp. with DSP N/A

SPL / IMPEDANCE VS FREQ.


OUTPUT: 2 x XLR line out


CONTROL:


INPUT: 2 x 1/4" & XLR combo, 1/8" Aux

Volume, onboard DSP

VOLTAGE: Neutrik PowerCON in & out 100V~240V (50~60Hz)







ZETHUS-115S

ZETHUS-115SPW

ACTIVE



ZETHUS-115SW ZETHUS-115SWPW

PASSIVE

ACTIVE

* Fit with ZETHUS-205 / 208 / 110 full range line array.

FEATURES

* 15" passive / active line array subwoofer.

* 15" customized high power LF with 4" voice coil,

* Used in small and mid-size live sound venues, permanent installation in clubs, ballrooms, restaurants, houses of worship, convention centres, live theatres etc

ZETHUS-115S / ZETHUS-115SW

Texture coating (RAL colors available)

671 W - 621 D - 450 H / 26.4 W - 24.4 D - 17.7 H

8

SIDE

Steel with anti-corrosion coat

40 kg / 88.2 lbs

N/A

* High grade plywood with quality texture coating avaliable in black and white.

SPECIFICATIONS	
MODEL:	ZETHUS-115SPW / ZETHUS-115SWPW

SYSTEM DATA: FREQUENCY RESPONSE: 38 Hz - 180 Hz 38 Hz - 180 Hz SENSITIVITY 100 db 100 db SPL MAX: 128 db 128 db DISPERSION: Omnidirectional Omnidirectional LOUDSPEAKER DATA: CONFIGURATION: 15" active line array subwoofer 15" passive line array subwoofer TRANSDUCER: LF: 1 x 15" LF: 1 x 15" IMPEDANCE: 80 Nominal 80 Nominal 500 / 1000W POWER HANDLING 600 / 1200W 2 x 4 Pin Speakon® CONNECTORS: PHYSICAL CABINET CONSTRUCTION: High grade 100% birch plywood High grade 100% birch plywood MOUNTING: Integrated line array hardware Integrated line array hardware

FINISH: Texture coating (RAL colors available) GRILL AND RIGGING COMPONENT: Steel with anti-corrosion coat DIMENSIONS (MM / INCH): 671 W - 621 D - 450 H / 26.4 W - 24.4 D - 17.7 H 42.5 kg / 93.7 lbs WFIGHT:


AMPLIFIER: CLASS D amp. INPUT: 2 x 1/4" & XLR combo OUTPUT: 2 x XLR (Full Range / High Pass)

CONTROL: Volume, polarity, LPF

VOLTAGE: Neutrik PowerCON in & out 100V~240V (50~60Hz)

SPL / IMPEDANCE VS FREQ.





www.soundtown.com 2 Email: support@soundtown.com

www.soundtown.com 3 Email: support@soundtown.com

ZETHUS-110

ZETHUS-110PW

PASSIVE

ACTIVE



ZETHUS-110W **ZETHUS-110WPW**

PASSIVE



FEATURES

- * Used in small and mid-size live sound venues, permanent installation in clubs,

ZETHUS-110 / ZETHUS-110W

10" passive full range line array

LF: 1 x 10", HF: 1 x 2" diaphragm

High grade 100% birch plywood

Texture coating (RAL colors available)

521 W - 390 D - 299 H / 20.5 W - 15.2 D - 11.8 H

Integrated line array hardware

Steel with anti-corrosion coat

55 Hz - 19K Hz

 $90^{\circ} \times 20^{\circ} (H \times V)$

8Ω Nominal

300 / 600W

2 x 4 Pin Speakon®

19.5 kg / 43 lbs

N/A

101 db

128 db

SPECIFICATIONS

SYSTEM DATA FREQUENCY RESPONSE SENSITIVITY SPL MAX: 128 db DISPERSION:


LOUDSPEAKER DATA: CONFIGURATION: TRANSDUCER: IMPEDANCE: POWER HANDLING

CONNECTORS: PHYSICAL: CABINET CONSTRUCTION: MOUNTING:

FINISH: GRILL AND RIGGING COMPONENT: DIMENSIONS (MM / INCH):

WEIGHT:

CONTROL: Volume, onboard DSP



:	ZETHUS-110PW / ZETHUS-110WPW
:	
:	55 Hz - 19K Hz
/	101 db

90° x 20° (H x V)

10" active full range line array LF: 1 x 10", HF: 1 x 2" diaphragm 8Ω Nominal

300 / 600W

High grade 100% birch plywood Integrated line array hardware Texture coating (RAL colors available) Steel with anti-corrosion coat

521 W - 390 D - 299 H / 20.5 W - 15.2 D - 11.8 H 20.5 kg / 45 lbs

AMPLIFIER: Class-D amp. with DSP INPUT: 2 x 1/4" & XLR combo, 1/8" Aux OUTPUT: 2 x XLR line out

VOLTAGE: Neutrik PowerCON in & out 100V~240V (50~60Hz)

- * 10" passive / active full range line array speaker.
- * 10" LF, 2" titanium compression driver.
- * High grade plywood with quality texture coating avaliable in black and white.
- * Fit with ZETHUS-115S/215S (SPW) subwoofer.
- ballrooms, restaurants, houses of worship, convention centres, live theatres etc.

ZETHUS-215S ZETHUS-215SPW

PASSIVE

ACTIVE



FEATURES

- * Dual 15" passive / active line array subwoofer.
- * 2 x 15" customized high power LF with 4" voice coil.
- * High grade plywood with quality texture coating avaliable in black and white.
- * Fit with ZETHUS-110 full range line array.
- * Used in small and mid-size live sound venues, permanent installation in clubs, ballrooms, restaurants, houses of worship, convention centres, live theatres etc

SPECIFICATIONS MODEL: ZETHUS-215SPW ZETHUS-215S SYSTEM DATA: FREQUENCY RESPONSE: 35 Hz - 350 Hz 35 Hz - 350 Hz SENSITIVITY 100 db 100 db SPI MAX: 128 db 128 db DISPERSION: Omnidirectional Omnidirectional LOUDSPEAKER DATA: Dual 15" passive line array subwoofer CONFIGURATION: Dual 15" active line array subwoofer TRANSDUCER: LF: 2 x 15" LF: 2 x 15" IMPEDANCE: 2 x 8Ω Nominal (Bi-amp) 4Ω Nominal POWER HANDLING 800 / 1600W 800 / 1600W CONNECTORS: 2 x 4 Pin Speakon® PHYSICAL: CABINET CONSTRUCTION: High grade 100% birch plywood High grade 100% birch plywood

SPL / IMPEDANCE VS FREQ.

OUTPUT: 2 x XLR Line out

Integrated line array hardware

Steel with anti-corrosion coat

64.5 kg / 142 lbs

2 x 1/4" & XLR combo

Volume, polarity, LPF

Texture coating (RAL colors available)

CLASS D amp. (2 channel Bi-amped)

VOLTAGE: Neutrik PowerCON in & out 100V~240V (50~60Hz)

495 W - 547 D - 850 H / 19.5 W - 21.5 D - 33.4 H

MOUNTING:

GRILL AND RIGGING COMPONENT:


DIMENSIONS (MM / INCH):


FINISH:


WEIGHT:

AMPLIFIER:

CONTROL:







Integrated line array hardware


Steel with anti-corrosion coat

62.5 kg / 138 lbs

N/A


Texture coating (RAL colors available)

495 W - 547 D - 850 H / 19.5 W - 21.5 D - 33.4 H



SPL / IMPEDANCE VS FREQ.





ZETHUS-210B

PASSIVE

ZETHUS-210BPW





FEATURES

- * Dual 10" passive / active full range line array speaker.
- * 2x10" LF, 2 x 1.4" titanium compression driver.
- * Passive model Bi-amp / Full range switchable.
- * Active model built-in Class D amp. w/ onboard DSP
- * High grade plywood with quality texture coating avaliable in black and white.
- * Fit with ZETHUS-118S/218S (SPW) subwoofer.
- * Used in small and mid-size live sound venues, permanent installation in clubs, ballrooms, restaurants, houses of worship, convention centres, live theatres etc.

ZETHUS-118S **PASSIVE**

ZETHUS-118SPW

ACTIVE



FEATURES

- * 18" passive / active line array subwoofer.
- * 18" customized high power LF with 4" voice coil.
- * High grade plywood with quality texture coating avaliable in black and white.
- * Fit with ZETHUS-210B full range line array.
- * Used in small and mid-size live sound venues, permanent installation in clubs, ballrooms, restaurants, houses of worship, convention centres, live theatres etc.

SPECIFICATIONS MODEL: ZETHUS-210BPW ZETHUS-210B SYSTEM DATA: FREQUENCY RESPONSE: 52 Hz - 19k Hz 52 Hz - 19k Hz SENSITIVITY 103 db 103 db SPL MAX: 130 db 130 db DISPERSION: 120° x 15° (H x V) 120° x 15° (H x V) LOUDSPEAKER DATA: CONFIGURATION: Compact dual 10" active full range line array Compact dual 10" passive full range line array TRANSDUCER: LF: 2 x 10", HF: 2 x 1.4" diaphragm LF: 2 x 10", HF: 2 x 1.4" diaphragm IMPEDANCE: 4Ω Full range: 16Ω ; Bi-amp: LF: 16Ω , HF: 16Ω POWER HANDLING 550 / 2200W 550 / 2200W CONNECTORS: 2 x 4 Pin Speakon® 2 x 4 Pin Speakon® PHYSICAL: CABINET CONSTRUCTION: High grade 100% birch plywood High grade 100% birch plywood MOUNTING: Compact line array hardware Compact line array hardware FINISH: Texture coating (RAL colors available) Texture coating (RAL colors available) GRILL AND RIGGING COMPONENT: Steel with anti-corrosion coat Steel with anti-corrosion coat 796 W - 420 D - 320 H / 30.3 W - 16.5 D - 12.6 H DIMENSIONS (MM / INCH): 796 W - 420 D - 320 H / 30.3 W - 16.5 D - 12.6 H WEIGHT: 31.5 kg / 69 lbs 29.5 kg / 65 lbs AMPLIFIER: Class-D amp. with DSP INPUT: 2 x 1/4" & XLR combo, 1/8" Aux OUTPUT: 2 x XLR line out


SPECIFICATIONS MODEL: ZETHUS-118SPW ZETHUS-118S SYSTEM DATA: FREQUENCY RESPONSE: 32 Hz - 180 Hz 32 Hz - 180 Hz SENSITIVITY 102 db 102 db SPL MAX: 129 db 129 db DISPERSION: Omnidirectional Omnidirectional LOUDSPEAKER DATA: CONFIGURATION: 18" active line array subwoofer 18" passive line array subwoofer TRANSDUCER: LF: 1 x 18" LF: 1 x 18" IMPEDANCE: 8Ω Nominal 8Ω Nominal POWER HANDLING 800 / 1600W 800 / 1600W CONNECTORS: 2 x 4 Pin Speakon® PHYSICAL: CABINET CONSTRUCTION: High grade 100% birch plywood High grade 100% birch plywood MOUNTING: Integrated line array hardware Integrated line array hardware FINISH: Texture coating (RAL colors available) Texture coating (RAL colors available) GRILL AND RIGGING COMPONENT: Steel with anti-corrosion coat Steel with anti-corrosion coat DIMENSIONS (MM / INCH): 796 W - 550 D - 515 H / 31.3 W - 21.6 D - 20.2 H 796 W - 550 D - 515 H / 31.3 W - 21.6 D - 20.2 H WEIGHT: 50.9 kg / 112 lbs 48.9 kg / 108 lbs AMPLIFIER: CLASS D amp. N/A INPUT: 2 x 1/4" & XLR combo OUTPUT: 2 x XLR Line out CONTROL: Volume, polarity, LPF




CONTROL: Volume, onboard DSP

VOLTAGE: Neutrik PowerCON in & out 100V~240V (50~60Hz)












SPL / IMPEDANCE VS FREQ.









FRONT

TOP

VOLTAGE: Neutrik PowerCON in & out 100V~240V (50~60Hz)

ZETHUS-112B

SPECIFICATIONS

GRILL AND RIGGING COMPONENT:

DIMENSIONS (MM / INCH):

PASSIVE

ZETHUS-112BPW

ACTIVE



FINISH:

WEIGHT:

INPUT:

OUTPUT:

FEATURES

- * 12" passive / active full range line array speaker.
- * 12" LF, 2 x 1.4" titanium compression driver.
- * Active model built-in Class D amp. w/ onboard DSP.
- * Fit with ZETHUS-VX118S (SPW) subwoofer.
- * High grade plywood with quality texture coating avaliable in black and white.

Texture coating (RAL colors available)

570 W - 420 D - 360 H / 22.4 W - 16.5 D - 14.2 H

Steel with anti-corrosion coat

24 kg / 52.9 lbs

ZETHUS-VX118S PASSIVE

ZETHUS-VX118SPW ACTIVE



FEATURES

- * 18" passive / active line array subwoofer.
- * 18" customized high power LF with 4" voice coil,
- * High grade plywood with quality texture coating avaliable in black and white.
- * Fit with ZETHUS-112B (BPW) full range line array.
- * Used in small and mid-size live sound venues, permanent installation in clubs, ballrooms, restaurants, houses of worship, convention centres, live theatres etc

MODEL: ZETHUS-112BPW ZETHUS-112B SYSTEM DATA: FREQUENCY RESPONSE: 45 Hz - 20K Hz 45 Hz - 20K Hz SENSITIVITY 102 db 102 db SPL MAX: 130 db 130 db DISPERSION: 120° x 15° (H x V) 120° x 15° (H x V) LOUDSPEAKER DATA: CONFIGURATION: 12" active full range line array 12" passive full range line array TRANSDUCER: LF: 1 x 12", HF: 2 x 1.4" diaphragm LF: 1 x 12", HF: 2 x 1.4" diaphragm Full range: 8Ω ; Bi-amp: LF: 8Ω , HF: 16Ω IMPEDANCE: 8Ω Nominal POWER HANDLING 400 / 800W 400 / 800W CONNECTORS: 2 x 4 Pin Speakon® PHYSICAL: CABINET CONSTRUCTION: High grade 100% birch plywood High grade 100% birch plywood MOUNTING: Integrated line array hardware Integrated line array hardware

Texture coating (RAL colors available)

570 W - 420 D - 360 H / 22.4 W - 16.5 D - 14.2 H

Steel with anti-corrosion coat

2 x 1/4" & XLR combo, 1/8" Aux


VOLTAGE: Neutrik PowerCON in & out 100V~240V (50~60Hz)

25.5 kg / 56.2 lbs

2 x XLR line out


AMPLIFIER: CLASS D amp. With DSP


CONTROL: Volume, onboard DSP

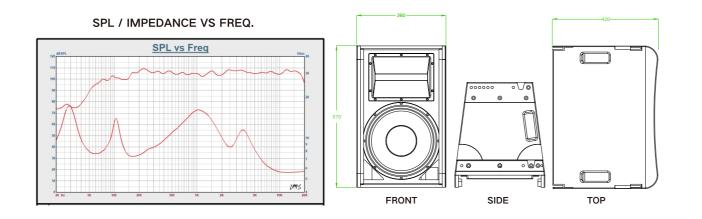

SPECIFICATIONS MODEL: ZETHUS-VX118SPW ZETHUS-VX118S SYSTEM DATA: FREQUENCY RESPONSE: 32 Hz - 180 Hz 32 Hz - 180 Hz SENSITIVITY 102 db 102 db SPL MAX: 129 db 129 db DISPERSION: Omnidirectional Omnidirectional LOUDSPEAKER DATA: CONFIGURATION: 18" active line array subwoofer 18" passive line array subwoofer TRANSDUCER: LF: 1 x 18" LF: 1 x 18" IMPEDANCE: 8Ω Nominal 8Ω Nominal POWER HANDLING 800 / 1600W 800 / 1600W CONNECTORS: 2 x 4 Pin Speakon® PHYSICAL: CABINET CONSTRUCTION: High grade 100% birch plywood High grade 100% birch plywood MOUNTING: Integrated line array hardware Integrated line array hardware Texture coating (RAL colors available) FINISH: Texture coating (RAL colors available) GRILL AND RIGGING COMPONENT: Steel with anti-corrosion coat Steel with anti-corrosion coat DIMENSIONS (MM / INCH): 570 W - 600 D - 550 H / 22.4 W - 23.6 D - 21.6 H 570 W - 600 D - 550 H / 22.4 W - 23.6 D - 21.6 H WEIGHT: 42.5 kg / 93.7 lbs 40 kg / 88.2 lbs AMPLIFIER: CLASS D amp. 2 x 1/4" & XLR combo INPUT: OUTPUT: 2 x XLR Line out CONTROL: Volume, polarity, LPF

SPL / IMPEDANCE VS FREQ.



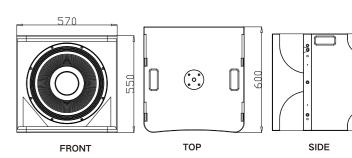

www.soundtown.com 8 Email: support@soundtown.com

www.soundtown.com 9 Email: support@soundtown.com

VOLTAGE: Neutrik PowerCON in & out 100V~240V (50~60Hz)

ZETHUS-218S

PASSIVE

ZETHUS-218SPW

ACTIVE



FEATURES

- * Dual 18" passive / active line array subwoofer.
- * 2 x 18" customized high power LF with 4" voice coil.
- * High grade plywood with quality texture coating avaliable in black and white.
- * Fit with ZETHUS-208 / 210 full range line array.
- * Used in mid and large-size live sound venues, permanent installation in clubs, ballrooms, restaurants, houses of worship, convention centres, live theatres etc.


SPECIFICATIONS MODEL: ZETHUS-218SPW ZETHUS-218S SYSTEM DATA: FREQUENCY RESPONSE: 32 Hz - 180 Hz 32 Hz - 180 Hz SENSITIVITY 104 db 104 db SPL MAX: 135 db 135 db DISPERSION: Omnidirectional Omnidirectional LOUDSPEAKER DATA: Dual 18" passive line array subwoofer CONFIGURATION: Dual 18" active line array subwoofer TRANSDUCER: LF: 2 x 18" LF: 2 x 18" IMPEDANCE: 2 x 8Ω Nominal (bi-amp) Parallel: 4Ω ; Bi-amp: $2 \times 8\Omega$ POWER HANDLING 1600 / 3200W 1600 / 3200W CONNECTORS: 2 x 4 Pin Speakon® PHYSICAL: CABINET CONSTRUCTION: High grade 100% birch plywood High grade 100% birch plywood MOUNTING: Integrated line array hardware Integrated line array hardware FINISH: Texture coating (RAL colors available) Texture coating (RAL colors available) GRILL AND RIGGING COMPONENT: Steel with anti-corrosion coat Steel with anti-corrosion coat DIMENSIONS (MM / INCH): 1150 W - 778 D - 550 H / 45.3 W - 30.6 D - 21.7 H 1150 W - 778 D - 550 H / 45.3 W - 30.6 D - 21.7 H WEIGHT: 101 kg / 222 lbs 107 kg / 236 lbs AMPLIFIER: CLASS D amp. (2 channel Bi-amped) INPUT: 2 x 1/4" & XLR combo OUTPUT: 2 x XLR Line out


SPL / IMPEDANCE VS FREQ.


CONTROL: Volume, polarity, LPF

VOLTAGE: Neutrik PowerCON in & out 100V~240V (50~60Hz)









ZETHUS-218S (SPW) COMBINATION



ZETHUS-218S(SPW)+4xZETHUS-210B(BPW)

ZETHUS-218S(SPW)+4xZETHUS-208B(BPW)

ZETHUS-M3

PASSIVE



FEATURES

- * 6 x 3" passive full range line array loudspeaker.
- * 6 x 3" customized mid frequency driver, 6 x 1" dome tweeter.
- * High grade plywood with quality texture coating avaliable in black and white.
- * Fit with ZETHUS-M115S (SPW) line array subwoofer.
- * Used in small and mid-size live sound venues, permanent installation in clubs, ballrooms, restaurants, houses of worship, convention centres, live theatres etc.

ZETHUS-M115S ZETHUS-M115SPW PASSIVE

ACTIVE 1.1 CHANNEL



FEATURES

- * 15" passive / active line array subwoofer.
- * 15" customized high power LF with 4" voice coil.
- * Active model built-in 1.1 channel Class-D amp. w/ onboard DSP and speaker out.
- * High grade plywood with quality texture coating.
- * Fit with ZETHUS-M3 full range line array.
- * Used in small and mid-size live sound venues, permanent installation in clubs, ballrooms, restaurants, houses of worship, convention centres, live theatres etc.

SPECIFICATIONS

MODEL: SYSTEM DATA: FREQUENCY RESPONSE: SENSITIVITY SPL MAX: DISPERSION: LOUDSPEAKER DATA: CONFIGURATION: TRANSDUCER: IMPEDANCE: POWER HANDLING CONNECTORS: PHYSICAL:

CABINET CONSTRUCTION:

MOUNTING: FINISH: GRILL AND RIGGING COMPONENT: DIMENSIONS (MM / INCH): WEIGHT:

ZETHUS-M3

105Hz - 18K Hz 100 db 98 db

6 x 3" full range passive line array speaker MF: 6 x 3"; HF: 6 x 1" dome tweeter 8Ω Nominal

High grade 100% birch plywood Integrated line array hardware Texture coating (RAL colors available) Steel with anti-corrosion coat 225 W - 325 D - 306 H / 8.8 W - 12.8 D - 12 H 7.1 kg / 15.7 lbs

SPECIFICATIONS

MODEL:	ZETHUS-M115SPW
SYSTEM DATA:	
FREQUENCY RESPONSE:	35 Hz - 180 Hz
SENSITIVITY	102 db
SPL MAX:	131 db

DISPERSION: Omnidirectional LOUDSPEAKER DATA: CONFIGURATION: 15" active line array subwoofer TRANSDUCER: LF: 1 x 15" IMPEDANCE: 8Ω Nominal 750 / 1500W

POWER HANDLING CONNECTORS: PHYSICAL: CABINET CONSTRUCTION:

MOUNTING: FINISH: DIMENSIONS (MM / INCH):

GRILL AND RIGGING COMPONENT:

WEIGHT:

High grade 100% birch plywood Integrated line array hardware Texture coating (RAL colors available) Steel with anti-corrosion coat 460 W - 520 D - 580 H / 18.1 W - 20.4 D - 22.8 H 38 kg / 84 lbs AMPLIFIER: 1.1 Channel CLASS D amp. with DSP

INPUT: 2 x 1/4" & XLR combo, Bluetooth OUTPUT: 2 x XLR (signal out), 1 x Speakon (power out) CONTROL: Volume, Onboard DSP

VOLTAGE: Neutrik PowerCON in 100V~240V (50~60Hz)

ZETHUS-M115S

35 Hz - 180 Hz 102 db 131 db Omnidirectional

> 15" passive line array subwoofer LF: 1 x 15" 8Ω Nominal

750 / 1500W 2 x 4 Pin Speakon®


High grade 100% birch plywood Integrated line array hardware Texture coating (RAL colors available) Steel with anti-corrosion coat


460 W - 520 D - 580 H / 18.1 W - 20.4 D - 22.8 H 36 kg / 79 lbs


N/A

SPL / IMPEDANCE VS FREQ.











SPL / IMPEDANCE VS FREQ.









www.soundtown.com 12 Email: support@soundtown.com

ZETHUS-IP208


PASSIVE



FEATURES

- * Dual 8" weatherproof passive full range line array speaker.
- * 2 x 8" Neodymium woofer + 3" Diaphragm Neodymium compression driver.
- * Bi-amp. / Full range switchable.
- * 3/4" waterproof complex fiber board with texture coating (IP54 standard).
- * Used in small and mid-size live sound venues, permanent installation in clubs, ballrooms, restaurants, houses of worship, convention centres, live theatres etc. and outdoor all weather applications.

ACCESSORIES



Included flying kits (spacer) 0°, 5°, 10°

SPECIFICATIONS

MODEL: ZETHUS-IP208 SYSTEM DATA: FREQUENCY RESPONSE: 55 Hz - 20k Hz SENSITIVITY 105 db 132 db SPL MAX:

DISPERSION: LOUDSPEAKER DATA: CONFIGURATION: TRANSDUCER: IMPEDANCE:

2 x 8" passive full range line array speaker

LF: 2 x 8" Neodymium woofer; HF: 3" Diaphragm Neodymium compression driver Passive: 16Ω ; Bi-amp: LF: 16Ω , HF: 8Ω

POWER HANDLING 450 / 900W

120° x 15° (H x V)

2 x 4 Pin Speakon® with waterproof cover

PHYSICAL: CABINET CONSTRUCTION:

CONNECTORS:

3/4" waterproof complex fiber board MOUNTING: Flying kits 0°, 5°, 10°

Texture coating (RAL colors available) FINISH:


GRILL AND RIGGING COMPONENT: Steel with anti-corrosion coat

DIMENSIONS (MM / INCH): 710 W - 350 D - 258 H / 27.9 W - 13.7 D - 10.2 H

WEIGHT: 27.6 kgs / 60.8 lbs

SPL / IMPEDANCE VS FREQ.









ZETHUS-IP115S

PASSIVE



FEATURES

- * 15" weatherproof passive high power subwoofer.
- * 15" high power woofer with 4" voice coil.
- * 3/4" waterproof complex fiber board with texture coating (IP54 standard).
- * Used in small and mid-size live sound venues, permanent installation in clubs, ballrooms, restaurants, houses of worship, convention centres, live theatres etc. and outdoor all weather applications.

ACCESSORIES



Included flying kits (spacer)

SPECIFICATIONS

MODEL: ZETHUS-IP115S

SYSTEM DATA: FREQUENCY RESPONSE:

35 Hz - 180 Hz 102 db

SENSITIVITY SPL MAX: DISPERSION:

130 db

LOUDSPEAKER DATA: CONFIGURATION:

15" passive line array subwoofer TRANSDUCER: LF: 1 x 15" with 4" voice coil IMPEDANCE: 8Ω

POWER HANDLING 700 / 1400W CONNECTORS:

2 x 4 Pin Speakon® with waterproof cover PHYSICAL:

CABINET CONSTRUCTION: 3/4" waterproof complex fiber board

MOUNTING: Flying kits 0°


FINISH: Texture coating (RAL colors available)


GRILL AND RIGGING COMPONENT: Steel with anti-corrosion coat DIMENSIONS (MM / INCH):


710 W - 550 D - 460 H / 27.9 W - 21.7 D - 18.1 H WEIGHT: 54.4 kgs / 120 lbs

SPL / IMPEDANCE VS FREQ.









ZETHUS-IP210

PASSIVE



FEATURES

- * Dual 10" weatherproof passive full range line array speaker.
- * 2 x 10" woofer + 3" Diaphragm Neodymium compression driver.
- * Bi-amp. / Full range switchable.
- * 3/4" waterproof complex fiber board with texture coating (IP54 standard).
- * Used in small and mid-size live sound venues, permanent installation in clubs, ballrooms, restaurants, houses of worship, convention centres, live theatres etc. and outdoor all weather applications.

ZETHUS-IP118S

PASSIVE



FEATURES

- * 18" weatherproof passive high power subwoofer.
- * 18" high power woofer with 4.5" voice coil.
- * 3/4" waterproof complex fiber board with texture coating (IP54 standard).
- * Used in small and mid-size live sound venues, permanent installation in clubs, ballrooms, restaurants, houses of worship, convention centres, live theatres etc. and outdoor all weather applications.

SPECIFICATIONS

MODEL: SYSTEM DATA:

FREQUENCY RESPONSE: SENSITIVITY

SPL MAX: 134 db DISPERSION:

LOUDSPEAKER DATA: CONFIGURATION: TRANSDUCER: IMPEDANCE:

Passive: 16Ω ; Bi-amp: LF: 16Ω , HF: 8Ω 700 / 1400W

POWER HANDLING CONNECTORS:

PHYSICAL: CABINET CONSTRUCTION: 3/4" waterproof complex fiber board

MOUNTING: FINISH:

Texture coating (RAL colors available)

GRILL AND RIGGING COMPONENT:

DIMENSIONS (MM / INCH): WEIGHT:

ZETHUS-IP210

50 Hz - 20k Hz 106 db

120° x 15° (H x V)

2 x 10" passive full range line array speaker LF: 2 x 10" woofer; HF: 3" Diaphragm Neodymium compression driver

2 x 4 Pin Speakon® with waterproof cover

Compact line array hardware

Steel with anti-corrosion coat

852 W - 430 D - 353 H / 33.5 W - 16.9 D - 13.9 H

38.6 kgs / 85 lbs

SPECIFICATIONS

MODEL: ZETHUS-IP118S

SYSTEM DATA: FREQUENCY RESPONSE: 32 Hz - 180 Hz SENSITIVITY

104 db 135 db

SPL MAX: DISPERSION: Omnidirectional LOUDSPEAKER DATA: CONFIGURATION:

18" passive line array subwoofer LF: 1 x 18" with 4.5" voice coil 80

IMPEDANCE: POWER HANDLING CONNECTORS: PHYSICAL:

TRANSDUCER:

2 x 4 Pin Speakon® with waterproof cover

CABINET CONSTRUCTION: 3/4" waterproof complex fiber board MOUNTING: Compact line array hardware

1200 / 2400W


FINISH: Texture coating (RAL colors available) GRILL AND RIGGING COMPONENT: Steel with anti-corrosion coat

DIMENSIONS (MM / INCH): 852 W - 550 D - 510 H / 33.5 W - 21.7 D - 20.1 H

WEIGHT: 70.3 kgs / 155 lbs


SPL / IMPEDANCE VS FREQ.






SPL / IMPEDANCE VS FREQ.










FRONT

INSTALLATION GUIDE

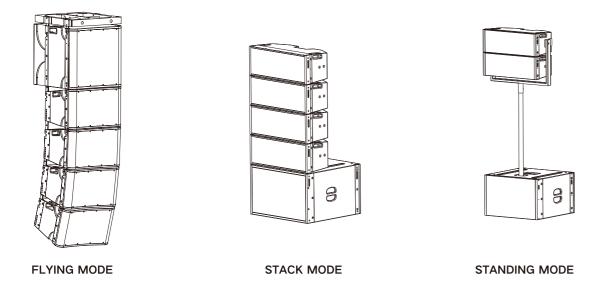

COMBINATION		FLYING MODE		STACK MODE		STANDING MODE	
FULL RANGE	+SUBWOOFER		COMPONENT		COMPONENT		COMPONENT
ZETHUS-205	ZETHUS-115S	•	ZETHUS-115SFF + ZETHUS-205V2AD	-	-	•	ZETHUS-205SS
ZETHUS-208	ZETHUS-115S	•	ZETHUS-115SFF	-	-	•	ZETHUS-208SS
ZETHUS-208	ZETHUS-218S	-	-	•	ZETHUS-SF1	-	-
ZETHUS-110	ZETHUS-115S	•	ZETHUS-115SFF + ZETHUS-110AD	-	-	-	-
ZETHUS-110	ZETHUS-215S	•	ZETHUS-110FF	•	-	-	-
ZETHUS-210	ZETHUS-118S	•	ZETHUS-210FF	•	-	-	-
ZETHUS-210	ZETHUS-218S	-	-	•	ZETHUS-SF1	-	-
ZETHUS-112	ZETHUS-VX118S	•	ZETHUS-112FF	•	-	•	STSDA-M54B
ZETHUS-M3	ZETHUS-M115S	-	-	•	-	•	ZETHUS-M3AD
ZETHUS-IP208	ZETHUS-IP115S	•	ZETHUS-IP115SFF	•	-	-	-
ZETHUS-IP210	ZETHUS-IP118S	•	ZETHUS-IP210FF	-	-	-	-
FULL RA	NGE ONLY						
ZETHUS-205		•	ZETHUS-205FF	-	-	-	-
ZETHUS-208		•	ZETHUS-115SFF	-	-	-	-
ZETHUS-110		•	ZETHUS-110FF	-	-	-	-
ZETHUS-210		•	ZETHUS-210FF	-	-	-	-
ZETHUS-112		•	ZETHUS-112FF	-	-	-	-
ZETHUS-M3		•	ZETHUS-M3FF	-	-	-	-
ZETHUS-IP208		•	ZETHUS-IP115FF	-	-	-	-
ZETHUS-IP210		•	ZETHUS-IP210FF	-	-	-	-

ACCESSORIES LIST




Support Stand ZETHUS-205SS (Fit ZETHUS-110S/ZETHUS-205) ZETHUS-208SS (Fit ZETHUS-112S/ZETHUS-208) One end with M20 bolt.




Flying Frame ZETHUS-110FF (Fit ZETHUS-110) ZETHUS-210FF (Fit ZETHUS-210B)



Flying Frame
ZETHUS-115SFF
(Fit ZETHUS-115S)
(Fit ZETHUS-208)
(Fit ZETHUS-110 with Adaptor A)
(Fit ZETHUS-205 with Adaptor B)




Flying Bar (Adaptor)
A. ZETHUS-110AD
(Connect ZETHUS-115S with ZETHUS-110) B. ZETHUS-205AD (Connect ZETHUS-115S with ZETHUS-205)




Flying Frame ZETHUS-IP115SFF (Fit ZETHUS-IP208/ZETHUS-IP115S)



Flying Kits (Spacer) Included in ZETHUS-IP208 (0°, 5°, 10°) Included in ZETHUS-IP115S (0°)



Stack Frame ZETHUS-SF1 (Fit ZETHUS-208(210)/ZETHUS-218S)



Flying Frame ZETHUS-IP210FF (Fit ZETHUS-IP210/ZETHUS-IP118S)



Flying Frame ZETHUS-M3FF (Fit ZETHUS-M3)



Support Stand: ZETHUS-M3AD (Fit ZETHUS-M3/ZETHUS-M115S)