



# Quick TeeJet® Caps

## Color Code

|       |       |     |      |       |        |       |        |        |        |
|-------|-------|-----|------|-------|--------|-------|--------|--------|--------|
| 1     | 2     | 3   | 4    | 5     | 6      | 7     | 8      | 9      | 10     |
| Black | White | Red | Blue | Green | Yellow | Brown | Orange | Gray†† | Violet |


| QUICK TEEJET CAPS | PART NUMBER                   | FOR USE WITH FLAT SPRAY TIPS<br>300 PSI (20 bar) MAXIMUM PRESSURE |   |
|-------------------|-------------------------------|---|---|
|                   |                               | QUICK TEEJET CAP & SEAT GASKET SET                                |   |
|                   | 25612- * -NYR<br>25612-9-PP†† | <b>TeeJet® Flat Spray Tips</b> (Smaller Capacities)               | TP Standard -0067 Thru -08<br>XR -01 Thru -08<br>DG TeeJet*<br>TT<br>TTJ60 Turbo TwinJet<br>AIXR TeeJet*<br>OC TeeJet                                       |
|                   | 25610- * -NYR                 | <b>TeeJet Flat Spray Tips</b> (Larger Capacities)                 | TP Standard -10 Thru -20<br>XR -10 Thru -15   |
|                   | 25598- * -NYR                 | <b>TJ60 TwinJet®</b>  | AI TeeJet and AIUB TeeJet<br>S3J StreamJet<br>DG TwinJet*<br>Turbo TeeJet Induction*<br>AITTJ60 Turbo TwinJet (02-06)                                       |
|                   | 98579-1-NYR†                  | <b>AI3070</b>   | AITTJ60 Turbo TwinJet (08-15)   |
|                   | 25596- * -NYR                 | <b>TeeJet Flat Spray Tips</b> (Smaller Capacities)                | Tips can be positioned in choice of two spray plane directions—parallel or perpendicular to wings of Quick TeeJet cap.                                      |
|                   | 25600- * -NYR                 | <b>Turbo FloodJet®</b> VisiFlo® Spray Tip                         | TK-VS FloodJet® VisiFlo Spray Tip<br>TK-VP FloodJet® VisiFlo Spray Tip<br>Locating Nib  |
|                   | 25608- * -NYR<br>25608-9-PP†† | <b>TK FloodJet®</b>   | FL FullJet®<br>TX/TXA ConeJet®<br>TG Full Cone<br>Hose Shank<br>AITXA ConeJet   |
|                   | —                             | <b>D-Disc</b>   | Seal<br>Core<br>CP18999-EPR (EPDM standard)<br>CP18999-VI (Viton® optional)<br>Used with DC-Core Inserts and CP4916 Flow Regulators (Insert Core into Seal) |
|                   | 26278-1-NYR†                  | <b>Ceramic Disc-Core</b>  | D-Disc<br>Core<br>TXB ConeJet®<br>AITXB ConeJet   |
|                   | 114396-1-NYR†                 | <b>TXR ConeJet</b>  | TXR ConeJet<br>114396-1-NYR includes gasket and O-ring (CP7717-M10.5x1.5-VI)  |

\*Specify color code (see chart). Violet (10) only available in CP25611 and CP25597 Nylon caps.

†These Quick TeeJet caps available only in black.

††Polypropylene Quick TeeJet caps available only in gray and rated to 150 PSI (10 bar). Nylon caps not available in gray.

### Quick TeeJet Cap

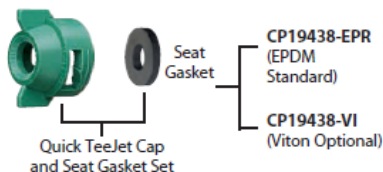

The Quick TeeJet caps are designed with grooves that fit locating lugs on the nozzle body. Caps are made of Nylon and are available for use with all TeeJet® spray tips. Maximum operating pressure of 300 PSI (20 bar).