

Dev Dolly - Assembly

1. Wheel assembly



2. Insert main screw through the bottom




3. Assemble bearing first then bolt. Do not overtighten bolt. The bearing should still move.



4. They are 2 types of wheels

5. Assemble wheels at bottom of sled

Adjustment adjustable wheels 2 sets of fixed wheels

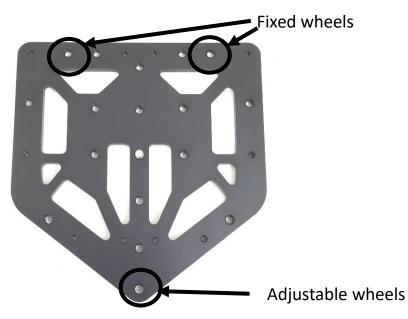

6. Final Product

