



F2F 25

USER MANUAL



What's included?

Beam Splitter Hood (B)



Mirror Hood (C)



Main Frame (A)



For more information please visit our website: www.glidegear.net



Assembly

- 1 Mount the F2F 25 onto a tripod.

To differentiate the bottom from the top side of the F2F 25:

- the Velcro strips are on the outside of the Main Frame (A) at the top and on the inside at the bottom of it as shown in Fig. 1.
- The notches in the center plates of the Main Frame (A) are closer to the bottom.

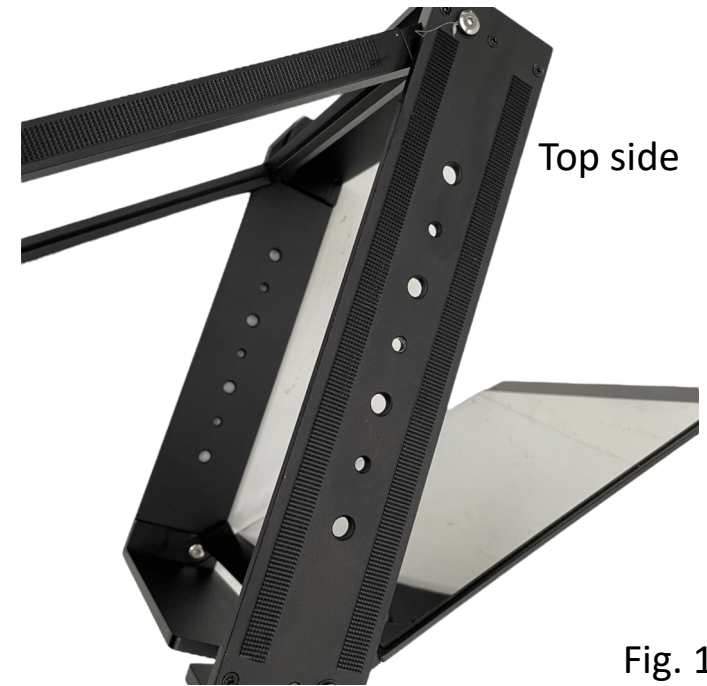


Fig. 1



Fig. 2

- 2 Completely open the 2 panels on the side of the Main Frame (A).
When fully opened, the 2 panels should be paralleled to each other as shown in Fig. 2.



Assembly

- 3 Attach the Mirror Hood (C) around the mirror panel using the Velcro strips as shown in Fig. 3.

Make sure the Mirror Hood (C) is tight around the panel so that light does not go through.



Fig. 3



Fig. 4

- 4 Attach the Beam Splitter Hood (B) around the beam splitter frame using the Velcro strips around it as shown in Fig. 4.
Make sure the Beam Splitter Hood (B) is tight around the frame so that the light cannot get through, which will affect how clearly you can see the reflection of the person you will be talking to while recording.



Assembly

- 5 Place your camera in front of the Beam Splitter and on the opposite side of the Mirror.

Place the sock around the lens to prevent any light from getting in.

Your setup should look as in Fig. 5.



Fig. 5



Fig. 6

- 6 The interviewer should stand next to the camera facing the mirror.
The interviewee should face the camera as shown in Fig. 6.

You are set. Enjoy direct eye contact during your interviews.