
# **JACKETED REACTORS, 10L**

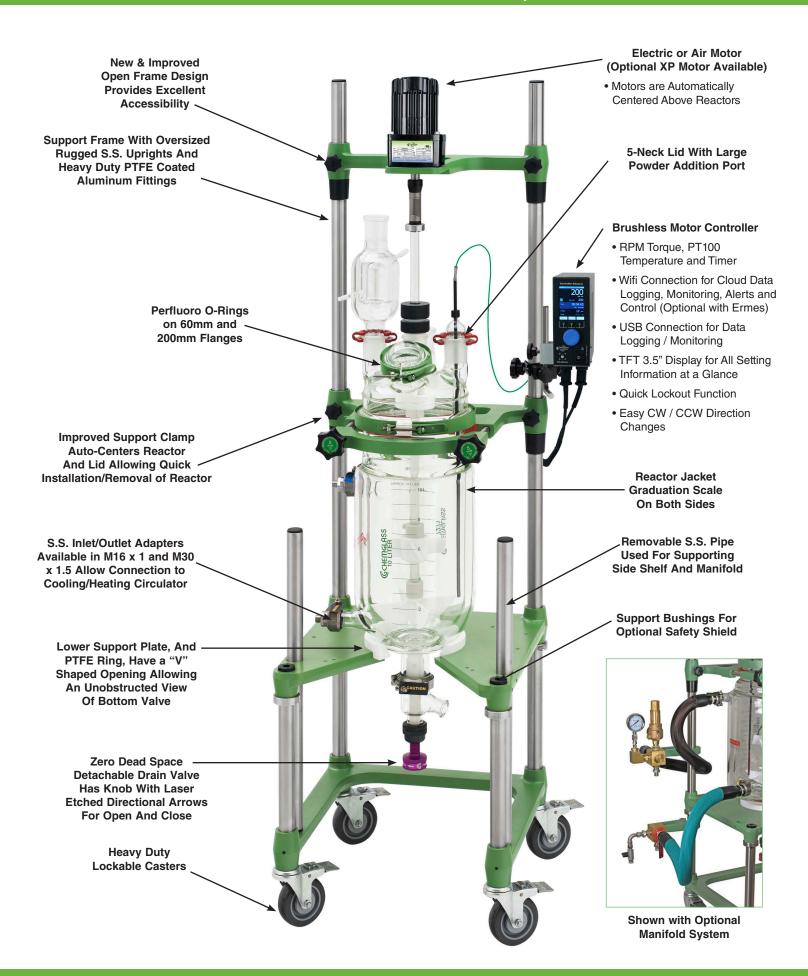

# **JACKETED REACTORS, 10L**

### 10L PROCESS REACTOR, CYLINDRICAL, JACKETED, ELECTRIC OR AIR MOTOR

Complete reactor system on our unique, open-air, auto-center stand. Supplied with the components listed below and numbered on the schematic drawing. Optional items are listed on the following pages. PLEASE NOTE: REACTOR STAND OVERALL HEIGHT WITH MOTOR AND CLEARANCE BELOW VALVE, ARE CALCULATED FOR ALL CHEMGLASS STIRRER BEARINGS, INCLUDING THE CG-2077-M MECHANICAL SEAL STIR BEARING.

#### **10L COMPLETE PROCESS REACTORS:**

| Part<br>Number | Description                   | Motor<br>Type | Approx. Overall Height<br>W/ Motor (in) | Clearance Below<br>Valve (in) |
|----------------|-------------------------------|---------------|-----------------------------------------|-------------------------------|
| CG-1965-610    | 10L Process Reactor, Complete | Electric      | 70.1                                    | 15.3                          |
| CG-1964-610    | 10L Process Reactor, Complete | Air           | 67.0                                    | 15.3                          |

### COMPLETE WITH CG-1969-M-01 MANIFOLD WITH M16 CIRCULATOR FITTINGS

| Part<br>Number |                                         |
|----------------|-----------------------------------------|
| Number         | Description                             |
| CG-1965-610M   | 10L Process Reactor, Complete, Electric |
| CG-1964-610M   | 10L Process Reactor, Complete, Air      |

| Standard Components Supplied With Complete Process Reactors: |                |                                                    |  |  |
|--------------------------------------------------------------|----------------|----------------------------------------------------|--|--|
| No.                                                          | Part No.       | Description                                        |  |  |
| 1                                                            | CG-1217-25     | Condenser, 45/50                                   |  |  |
| 2                                                            | CG-2097-10     | 19mm Stirrer Shaft, 30-5/8" OAL                    |  |  |
| 3                                                            | CG-2077-H-05   | 19mm PTFE Stir Bearing                             |  |  |
| 4                                                            | CG-149-01      | 60mm Glass Cap                                     |  |  |
| 5                                                            | CG-141-T-11    | 60mm S.S. Clamp, PTFE Coated                       |  |  |
| 6                                                            | CG-147-80      | 60mm Perfluoro O-Ring                              |  |  |
| 7                                                            | CG-147-84      | 200mm Perfluoro O-Ring                             |  |  |
| 8                                                            | CG-1930-31     | 10L Jacketed Reaction Vessel                       |  |  |
| 9                                                            | CG-1969-A-05   | S.S. Adapter, 1" Beaded Pipe to M16 X 1 Male (2ea) |  |  |
| 10                                                           | CG-1968-66     | 1" Beaded Pipe Coupling (2ea)                      |  |  |
| 11                                                           | CG-1968-67     | 2" Beaded Pipe Coupling                            |  |  |
| 12a                                                          | CG-2033-B-25   | Electric Stir Motor, 1/4Hp, 500 RPM                |  |  |
| 12b                                                          | CG-2025-20     | Air Motor, 3/8Hp                                   |  |  |
| 12c                                                          | CG-2025-10     | Filter-Regulator-Lubricator (Air Motor Only)       |  |  |
| 13a                                                          | CG-2044-30     | 19mm Tru-Stir® Shaft Coupling, (Electric)          |  |  |
| 13b                                                          | CG-2044-16     | 19mm Tru-Stir® Shaft Coupling, (Air)               |  |  |
| 15                                                           | CG-2033-V-75   | Controller, Motor, Temp. and Time (Electric Only)  |  |  |
| 17                                                           | CG-3498-03     | 1/2" OD Rod, 90° Bend                              |  |  |
| 18                                                           | CG-9253-10     | Universal Kwik Mount Klamp                         |  |  |
| 19                                                           | CG-1042-E-10   | Thermocouple Adapter, 45/50                        |  |  |
| 20                                                           | CG-1946-50     | 5-Neck Lid, 200mm                                  |  |  |
| 21                                                           | CG-141-T-15    | 200mm S.S. Clamp, PTFE Coated                      |  |  |
| 22                                                           | CG-2093-20     | PTFE Flake Catching Cup                            |  |  |
| 23                                                           | CG-1978-P926   | PT100 Temp. Sensor, 1/4" Diameter x 26" Long       |  |  |
| 24a                                                          | CG-2095-05     | 5" OD PTFE Agitator, 60°                           |  |  |
| 24b                                                          | CG-2096-09     | 7.5" OD PTFE Agitator, High Viscosity              |  |  |
| 25                                                           | CG-3055-10     | PTFE Support Ring, "V" Cut                         |  |  |
| 26                                                           | CG-1965-X-150  | Auto-Center Support Frame, 66" OAH                 |  |  |
| 27                                                           | CG-1968-GL-040 | Zero Dead Space Drain Valve                        |  |  |
|                                                              | CG-3002-L-45   | 45/50 PTFE Stopper With Loosening Ring             |  |  |
|                                                              | CG-145-09      | 45/50 Keck Clips (PK10)                            |  |  |
|                                                              | CG-1963-B-10   | Beam Torque Wrench                                 |  |  |
|                                                              | CG-1963-B-14   | 7/16" Deep Socket, 6 Point, 1/4" Drive             |  |  |

