



PERFORMANCE

°F %RH	80 60	75 50
Water Removal (P/Day)	350	233
Efficiency (P/kWh)	9.3	6.7
Energy Factor (L/kWh)	4.3	3.2


ELECTRICAL

°F %RH	80 60	80 60
Supply Voltage	230V	208V
Current Draw	6.9A	7.9A
Maximum Breaker Size	20A	20A
Power	1,565W	
Power Cord	NEMA 6-15P	
CFM	900	
BTU (Total)	20,300	
BTU (Motor Load)	5,100	
BTU (Heat of Condensation)	15,200	

SPECS

Control Type	Digital Onboard or External
Refrigerant Type	R410a
Refrigerant Amount	4 lb 12 oz
Weight	215 lb
Air Filter MERV Rating	MERV-13
Dimensions	20" x 22" x 2"
Drain Port Connection	3/4 Threaded NPT
Operating Temperature	56 F Min - 95 F Max

DIMENSIONS

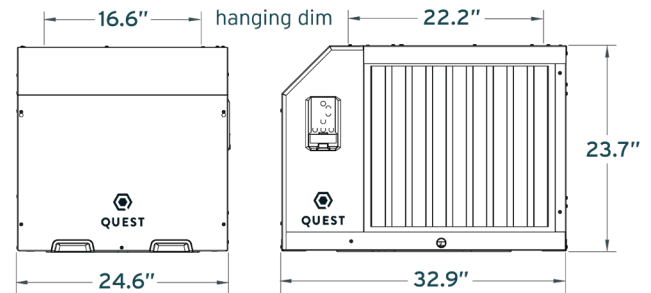

FEATURES

- + **Patented Multi-Coil Technology:** Achieves highest efficiencies available in the market
- + Digital onboard control, with optional external control
- + **Superior MERV-13 filtration:** Removes more harmful contaminants from the air, such as mold, bacteria and some viruses
- + Integrated handles and hanging points for easy movement and installation
- + Auto-restart after loss of power
- + Removable access panel for easy in-place maintenance and serviceability

Specifications are subject to change without notice. Drawings are not to scale.