

SDHQ Motorsports 190 S McQueen Rd Ste 109 Gilbert, AZ 85233 Phone: 480-633-2929

## Product Packing List

<u>Product:</u> <u>SDHQ-23-1140-JL</u>

Description: Jeep JL Switch Pros Power Module Mount

\_\_\_\_\_ (1) SDHQ Power Module Mounting Plate \_\_\_\_\_ (1) Hardware Package \_\_\_\_\_ (2) #8 S.S. SAE Washer SDHQ-23-1140-JL-A SDHQ-23-1140-JL-B

Inspected and Packaged by: \_\_\_\_\_

Date: \_

For questions or help with the installation, please call SDHQ Offroad @ 480-633-2929 Mon.–Fri. 8:00am–5:30pm and Sat. 8:00am–3:30pm Arizona Time. www.sdhqoffroad.com Page 2 of 6



SDHQ Motorsports 190 S McQueen Rd Ste 109 Gilbert, AZ 85233 Phone: 480-633-2929

## **INSTALLATION INSTRUCTIONS**


Product: <u>SDHQ-23-1140-JL</u>

Description: Jeep JL Switch Pros Power Module Mount



<u>Parts List</u>	<u>Hardware List</u>	<u>Required Tools</u>
(1) SDHQ Power Module Mounting Plate	(2) #8 S.S. SAE Washer	10mm Socket
SDHQ-23-1140-JL-A (1) Hardware Package		9/32" Socket Ratchet
SDHQ-23-1140-JL-B		Phillips Screwdriver
Tech Notes		
Fits 2018+ Jeep JL and JT		
**Approximate install: 15 minutes (not including wiring)**		

For questions or help with the installation, please call SDHQ Offroad @ 480-633-2929 Mon.–Fri. 8:00am–5:30pm and Sat. 8:00am–3:30pm Arizona Time. www.sdhqoffroad.com Page 3 of 6

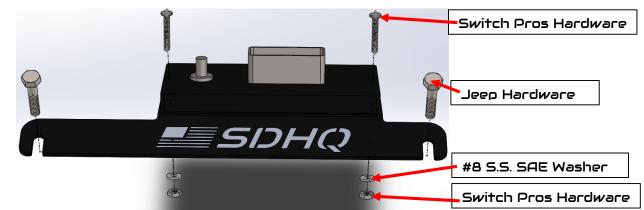

\*\*\*READ ALL INSTRUCTIONS THOROUGHLY FROM START TO FINISH BEFORE BEGINNING INSTALLATION! \*\*\*

## Installation Instructions:

- **1.** Unbox all of your parts and familiarize yourself with them.
- 2. Preparing Your Jeep. Start by opening the hood. On the passenger side, loosen the (2) bolts circled below with a 10mm socket until there is about a 1/2" gap.



- 3. Now place the Switch Pros Power Module onto the SDHQ mount and line up the holes. When the placement is desirable, tighten the hardware that came with the Switch Pros Power Module with a 9/32" socket and Philips screwdriver. Use the drawing on the top of this page as a reference.
- **4.** Slide the mount where the (2) previously loosened bolts from step 2 were. Once the placement is in a desirable position, tighten the (2) bolts.
- **5.** Proceed with the wiring of the power module.





For questions or help with the installation, please call SDHQ Offroad @ 480-633-2929 Mon.–Fri. 8:00am–5:30pm and Sat. 8:00am–3:30pm Arizona Time. www.sdhqoffroad.com Page 4 of 6

## Wiring:

Once the Switch-Pros power module is mounted, but BEFORE it is connected to anything else, do the following:

- 1. Reinstall battery (if battery was removed during installation), and secure factory connections. Start vehicle and confirm that battery is properly installed, connected and grounded.
- 2. Connect the Switch-Pros Ground wire lug to the negative terminal on the battery (grounding elsewhere will not properly filter noise and will void your product warranty).
- 3. Plug the 16-pin harness into the power module; be sure it locks in.
- 4. Connect the red Battery Cable to the positive terminal on the battery. Tighten down both ends, to prevent lug from rotating and possibly causing friction or spark.
- 5. Enjoy your SDHQ mounted Switch Pros Power Module!

\*\*\*Double check all hardware is installed correctly and tight\*\*\*

\*\*\*Re-torque ALL bolts after 100 miles\*\*\*



190 S McQueen Rd Ste 109 Gilbert, AZ 85233 Phone: 480-633-2929 | Fax: 480-633-1791 <u>www.sdhqoffroad.com</u>



For questions or help with the installation, please call SDHQ Offroad @ 480-633-2929 Mon.–Fri. 8:00am–5:30pm and Sat. 8:00am–3:30pm Arizona Time. www.sdhqoffroad.com Page 6 of 6