




BullDogPRO™ Heater systems & options

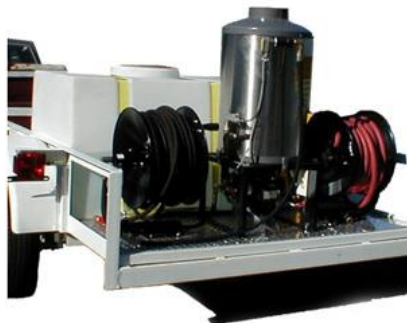

Our state-of-the-art heaters are cold water wrap, vertical style construction with 1/2" schedule 80 steel rated to **4000psi standard**. They come with a **210°F** temperature control at the water **outlet** and an **additional 140°F** temperature control & relief valve at the heater **inlet** for max safety. **Our heaters outlast others by double !** Custom units are available to 375°F and to **6000 PSI**.

Diesel Fired Heaters

- SH-d16v** –heat 4.5 gpm to 200°F & lower flow systems to 325°F.
Incl. 12vDC ..Beckett burner # ADC,
With 12vDC # SDC or SM 120vAC, 240vAC
- SH-d18v** –heat 6 gpm to 200°F & lower flow systems to 325°F.
Incl. 12vDC ..Beckett burner # ADC,
With 12vDC # SDC or SM 120vAC, 240vAC
- SH-d18T** –heat 8 gpm to 180°F & lower flow systems to 325°F.
Incl. 12vDC ..Beckett burner # ADC,
With 12vDC # SDC or SM 120vAC, 240vAC
- SH-d18H**- same as above in horizontal style, low profile version
- SH-d20v** – heat 8 gpm to 200°F & lower flow systems to 325°F
Incl. 12vDC # SDC or SM 120vAC, 240vAC
- SH-d20H**- same as above in horizontal style, low profile version
yes, image #3 shows it vertically mounted, "front-out" configuration for utility-van mounting.
- SH-d24v**- same as 20" vertical above, but can do 12gpm to 200°F

Propane Fired Heaters

- SH-Lp16** – heat 3.5 gpm to 200°F & lower flow systems to 325°F. 12vDC, 120vAC, 208-240vAC
- SH-Lp18** – heat 4.5 gpm to 200°F & lower flow systems to 325°F. 12vDC, 120vAC, 208-240vAC

Natural Gas Fired Heaters

- SH-ng18** – heat 3.5 gpm to 200°F & lower flow systems to 325°F. Available in 120vAC, 208-240vAC
- SH-ng20** – heat 5.5 gpm to 200°F & lower flow systems to 325°F. Available in 120vAC, 208-240vAC
- SH-ng22** – heat 6.5 gpm to 200°F & lower flow systems to 325°F. Available in 120vAC, 208-240vAC

Accessories Available

- ❖ 70 amp control relay on 12 volt DC systems
- ❖ Fuel pressure gauge
- ❖ Cleanable element Fuel filter / water separator
- ❖ 9 gal PHG Mounted black poly tank and many other sizes to 50 gallon
- ❖ **Portable cart frame** ..as seen above in image #4 for Diesel or Propane
- ❖ **3/4" coil** for larger flows... to **15gpm**
- ❖ **5000 psi to 6000 psi** system versions with appropriate controls
- Flow switch flame-control
- 5 gallon removable fuel cell
- Stainless Steel coils... for chemical processing industry
- Pressure safety relief



revised 4-14-14

Sirocco and BullDogPRO are quality products manufactured by...
1-800-400-CLEAN(2532) www.PressureWasher.net
 main office... 10821 Airport Drive El Cajon, Calif. 92020