

LAEGENDARY[®]

*Climbing Rope with
Disc Swing*

Safety and Assembly Instruction

Disclaimer

LAEGENDARY waves any responsibility for the misuse and inadequate installation of any products sold or distributed through it or any affiliate. The user assumes responsibility for any injuries received due to use, misuse, mishandling or the improper installation of the product and waives any responsibilities of LAEGENDARY. LAEGENDARY disclaims all warranties, expressed or implied, including, but not limited to, implied warranties of merchantability, title and fitness for a particular purpose or other proprietary rights. LAEGENDARY will not be held liable for any damages resulting from the use of this product.

IMPORTANT

READ AND FOLLOW ALL SAFETY INFORMATION AND INSTRUCTIONS BEFORE USING THIS PRODUCT. KEEP FOR FUTURE REFERENCE.

Essential Information

- Recommended for children 3+ years
- Do not leave child unattended while in use
- CAUTION: Use only under adult supervision
- Good safety practices should be followed at all times



Intended solely for family and domestic use, not for a commercial playground or daycare.
Maximum weight capacity: 120 LBS.

Hanging hardware is included. Do not install the Climbing Rope Swing over concrete, asphalt, packed earth, or any other hard surface. Confirm that the supporting structure is secure, it will support at least 200 pounds, is over level ground, and is no less than 6 ft on all sides from vertical elements.

WARNING! CHOKING HAZARD- SMALL PARTS, NOT FOR CHILDREN UNDER 3 YEARS.

WARNING! MAXIMUM WEIGHT SHOULD NOT EXCEED 120 LBS.

WARNING! DO NOT USE WITHOUT ADULT SUPERVISION!

WARNING! SMALL PARTS FOR ASSEMBLY BY AN ADULT.

CONTACT

To reduce the likelihood of injury please follow the guidelines as outlined in this manual. Your LAEGENDARY Rope Swing has been tested to ensure safety and complies with: ASTM F1148 Standard Consumer Safety Performance Specifications for Home Playground Equipment, F1487 Standard Consumer Safety Performance Specifications for Playground Equipment for Public Use, and CPSIA Specifications for lead paint.

Should you have any questions or comments regarding this manual, please do not hesitate to contact us.

LAEGENDARY®

LAEGENDARY

1440 Falcon Lane
Hoffman Estates, IL 60192

Phone: 646 859 1050
Email: support@laegendary.com
Web: www.laegendary.com

INSTALLATION

Tree Limb Assembly -Test tree limb to ensure that it will hold the weight limit of 200 LBS safely. Use the included tree strap to attach the Climbing Rope Disc Swing to the horizontal support. Throw the tree strap over the tree limb. Run the other end of the tree strap through the noose and tighten firmly. Attach swing with the included carabineer. Bottom of swing should be no less than 15 inches from ground (See fig. 1 & 2)

Swing set or other horizontal beam assembly - Attach the Climbing Rope Disc Swing to a swing set by removing one set of chains from an existing swing. For easiest attachment, use the included carabineer. Clip the carabineer to the swing set loop and then to the upper loop of the Disc Swing. The bottom of swing should be no less than 15 inches from ground. (See fig.1)

CLEARANCE REQUIREMENTS


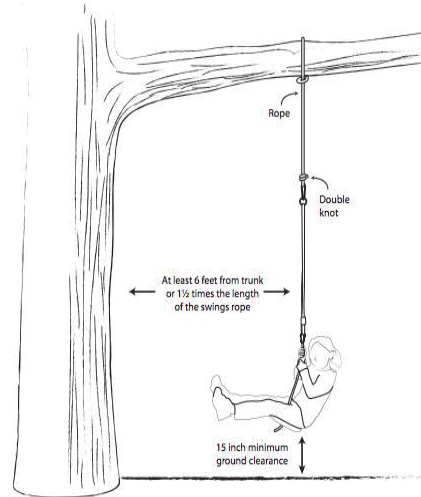


Fig. 1



Fig. 2

WARNING: Never swing higher than hook attachment

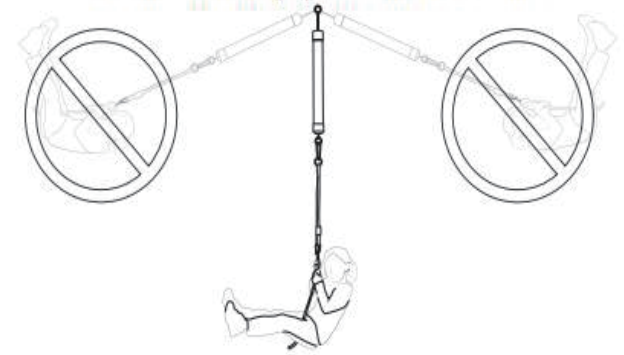

MAINTENANCE INSTRUCTIONS

1. At the beginning of each season and at least twice monthly during usage, treat ropes with a Teflon-based lubricant.
2. Before each use, check the rope, knots, support and all connections for evidence of deterioration, excessive wear, fractures, breaks or sharp edges and replace as necessary.
3. Take rope swing indoors when the temperature drops below 32 degrees Fahrenheit.

WARNING: Failure to carry out these checks and inspections could result in a fall or injury.

X3. SECTION 4 OF THE CONSUMER PRODUCT SAFETY COMMISSION'S OUTDOOR HOME PLAYGROUND SAFETY HANDBOOK

X3.1 Select Protective Surfacing – One of the most important things you can do to reduce the likelihood of serious head injuries is to install shock-absorbing protective surfacing under and around your play equipment. The protective surfacing should be applied to a depth that is suitable for the equipment height in accordance with ASTM Specification F 1292. There are different types of surfacing to choose from; whichever product you select, follow these guidelines:

X3.1.1 Loose Fill Materials:

X3.1.1.1 Maintain a minimum depth of 9 inches of loose-fill materials such as wood mulch/ chips, engineered wood fiber (EWF), or shredded/ recycled rubber mulch for equipment up to 8 feet high; and 9 inches of sand or pea gravel for equipment up to 5 feet high. NOTE: An initial fill level of 12 inches will compress to about a 9-inch depth of surfacing over time. The surfacing will also compact, displace, and settle, and should be periodically refilled to maintain at least a 9-inch depth.

X3.1.2 Use a minimum of 6 inches of protective surfacing for play equipment less than 4 feet in height. If maintained properly, this should be adequate. (At depths less than 6 inches, the protective material is too easily displaced or compacted.) NOTE: Do not install home playground equipment over concrete, asphalt, or any other hard surface. A fall onto a hard surface can result in serious injury to the equipment user. Grass and dirt are not considered protective surfacing because wear and environmental factors can reduce their shock absorbing effectiveness. Carpeting and thin mats are generally not adequate protective surfacing. Ground level equipment such as a sandbox, activity wall, playhouse or other equipment that has no elevated play surface does not need any protective surfacing.

X3.1.3 Use containment, such as digging out around the perimeter and/or v lining the perimeter with landscape edging. Don't forget to account for water drainage.

X3.1.3.1 Check and maintain the depth of the loose-fill surfacing material. To maintain the right amount of loose-fill materials, mark the correct level on play equipment support posts. That way you can easily see when to replenish and/or redistribute the surfacing.

X3.1.3.2 Do not install loose fill surfacing over hard surfaces such as concrete or asphalt.

X3.1.4 Poured-in-Place Surfaces or Pre-Manufactured Rubber Tiles You may be interested in using surfacing other than loose fill materials like rubber tiles or poured-in-place surfaces.

X3.1.4.1 Installations of these surfaces generally require a professional and are not "do-it-yourself" projects.

X3.1.4.2 Review surface specifications before purchasing this type of surfacing. Ask the installer/ manufacturer for a report showing that the product has been tested to the following safety standard: ASTM F1292 Standard Specification for Impact Attenuation of Surfacing Materials within the Use Zone of Playground Equipment. This report should show the specific height for which the surface is intended to protect against serious head injury. This height should be equal to or greater than the fall height – the vertical distance between a designated play surface (elevated surface for standing, sitting, or climbing) and the protective surfacing below – of your play equipment.

X3.1.4.3 Check the protective surfacing frequently for wear.

X3.1.5 Placement – Proper placement and maintenance of protective surfacing is essential. Be sure to:

X3.1.5.1 Extend surfacing at least 6 feet from the equipment in all directions.

X3.1.5.2 For to-fro swings, extend protective surfacing in front of and behind the swing to a distance equal to twice the height of the top bar from which the swing is suspended.

X3.1.5.3 For tire swings, extend surfacing in a circle whose radius is equal to the height of the suspending chain or rope, plus 6 feet in all directions.

OPERATION INSTRUCTIONS

1. An adult should supervise play on this product for children of all ages.
2. Limit: 1 child per swing.
3. Only for family domestic outdoor use by children 3-8 years old.
4. Dress children appropriately, including wearing well-fitting shoes that fully protect the feet.
5. Instruct children to:
 - avoid swinging empty seats or swings
 - to not swing higher than the hook attachment
 - to get off the swing only after it has completely stopped and to hold the rope until both feet are planted firmly on the ground
 - to remove articles before playing on equipment that create hazards when they get tangled and caught; examples include: ponchos, scarves, and other loose-fitting clothing, bike or other sports helmets
 - not to walk close to, in front of, behind, or between moving items.

DO NOT walk in front or behind swing while in motion