

# S-series Solar Module

## 535-560W

### HIGH EFFICIENCY SHINGLED MODULE



#### Shingling Technology

- Incorporating Shingling technology and flexible adhesive, give rise to high density layout



#### Aesthetic Appearance

- Cells are densely packed, free of tabbing ribbons, and have uniform appearance



#### Eco-friendly

- No fluorine and low lead material adopted, achieves eco-friendly PV design



#### Trustworthy Quality and Reliability

- Soldering-free technology eliminates mechanical stress and potential microcrack
- Parallel circuit design lowers hot spot risk



#### Lower BOS cost & Higher ROI

- Higher module efficiency reduces BOS cost and improve long term investment return


#### Linear Power Output Warranty

**15**

15-year warranty for materials

**25**

25-year warranty for linear power output

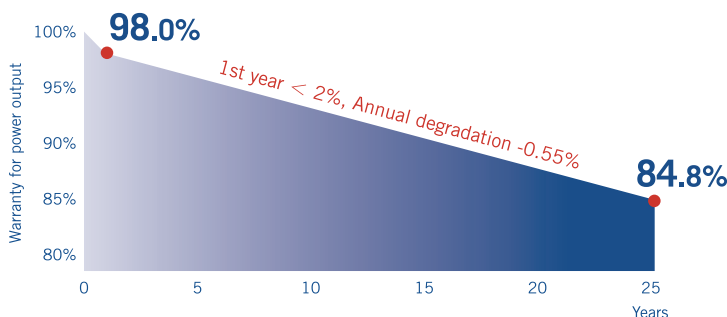

#### Quality Management System and Product Certification



IEC61215/61730, IEC62804(PID), IEC61701(Salt)  
 IEC62716(Ammonia), IEC60068-2-68(Sand)  
 ISO 9001:2015/ quality management system  
 ISO 14001:2015/ environmental management system  
 ISO 45001:2018/occupation health safety management system  
 ISO 50001:2011/energy management system  
 IEC TS 62941-2016/PV industry quality management system

## Electrical Characteristics (STC)

|                                 |     |       |       |       |       |       |       |
|---------------------------------|-----|-------|-------|-------|-------|-------|-------|
| Module Type: TP535-560PMB6-58SC |     | 560   | 555   | 550   | 545   | 540   | 535   |
| Maximum Power - Pm              | [W] | 560   | 555   | 550   | 545   | 540   | 535   |
| Open Circuit Voltage - Voc      | [V] | 47.3  | 47.2  | 47.1  | 47.0  | 46.9  | 46.8  |
| Short Circuit Current-Isc       | [A] | 15.17 | 15.07 | 14.97 | 14.86 | 14.76 | 14.65 |
| Maximum Power Voltage-Vm        | [V] | 39.3  | 39.2  | 39.1  | 39.0  | 38.9  | 38.8  |
| Maximum Power Current-Im        | [A] | 14.26 | 14.17 | 14.07 | 13.97 | 13.87 | 13.77 |
| Module Efficiency-η             | [%] | 21.4  | 21.2  | 21.0  | 20.9  | 20.7  | 20.5  |

## Electrical Characteristics at NMOT

|                           |     |       |       |       |       |       |       |
|---------------------------|-----|-------|-------|-------|-------|-------|-------|
| Maximum Power-Pm          | [W] | 422   | 418   | 414   | 410   | 407   | 403   |
| Open Circuit Voltage-Voc  | [V] | 45.1  | 45    | 44.9  | 44.8  | 44.7  | 44.6  |
| Short Circuit Current-Isc | [A] | 12.22 | 12.14 | 12.06 | 11.97 | 11.89 | 11.8  |
| Maximum Power Voltage-Vm  | [V] | 37.4  | 37.3  | 37.3  | 37.2  | 37.1  | 37    |
| Maximum Power Current-Im  | [A] | 11.27 | 11.19 | 11.11 | 11.03 | 10.96 | 10.88 |

Note:  
 1. Standard Test Conditions (STC): irradiance 1000 W/m<sup>2</sup>; AM 1.5; ambient temperature 25°C according to EN 60904-3;  
 2. Nominal Module Operating Temperature (NMOT): Irradiance 800W/m<sup>2</sup>; wind speed 1m/s, ambient temperature 20°C.  
 3. Tolerance of Pm: 0~+5W, Measuring uncertainty of power: ±3%. Performance deviation of Voc [V], Isc [A], Vm [V] and Im [A]: ±3%.

## Mechanical Characteristics

|                  |  |
|------------------|--|
| Dimensions       | 2384×1096×35mm   |
| Weight           | 28.3kg   |
| Front glass      | 3.2mm toughened glass  |
| Frame            | Anodized aluminum profile  |
| Cells            | Mono-crystalline solar cell  |
| Cell Orientation | 345 (69×5)   |
| Junction Box     | IP68, three diodes   |
| Cable            | 4mm <sup>2</sup> , +300mm/-1000(Vertical), +220mm/-180mm(Horizontal) |
| Packaging        | 31pcs/box; 620pcs/40'cabinet; 868pcs/flat car                        |


## Temperature Parameters

|                                |                |
|--------------------------------|----------------|
| NMOT                           | 42.30°C (±2°C) |
| Temperature Coefficient of Voc | -0.27%/°C      |
| Temperature Coefficient of Isc | +0.04%/°C      |
| Temperature Coefficient of Pm  | -0.34%/°C      |



## Maximum Ratings

|                               |      |   |
|-------------------------------|------|---|
| Maximum System Voltage        | [V]  | DC1500 (IEC)  |
| Series Fuse Rating            | [A]  | 25  |
| Maximum Surface Load Capacity | [Pa] | Front 5400 / Back 2400                                |
| Temperature Range             | [C]  | -40~+85   |
| Withstanding Hail             | [A]  | Maximum diameter of 25 mm with impact speed of 23 m/s |

## Engineering Drawings

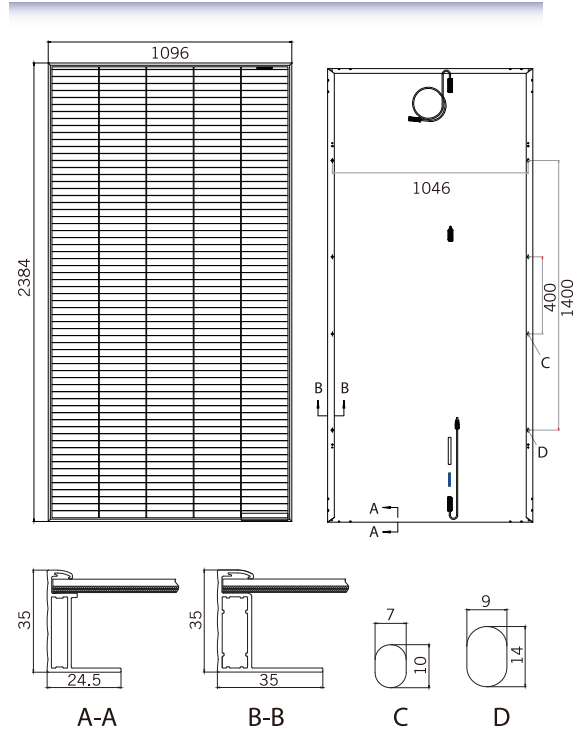

## I-V Curve

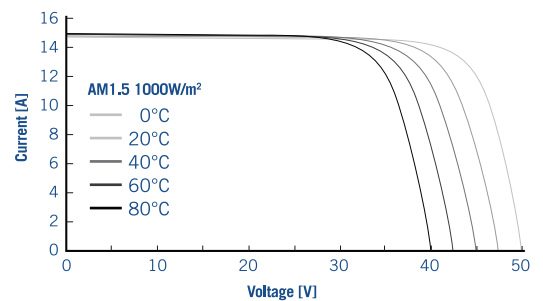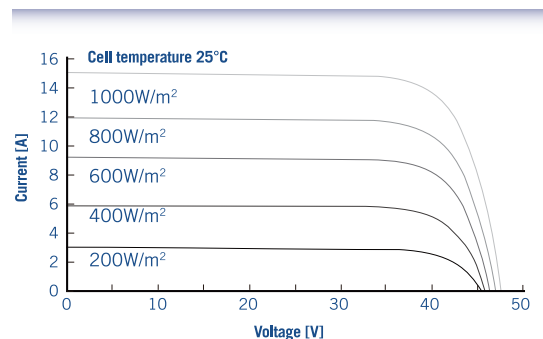

**Declaration:** With the technical progress and product updates, there exists a deviation between the technical parameter of the Topco Solar's future products and the technical parameter in this specification. The Topco Solar reserves the right to adjust the technical parameter at any time without notifying the customers. Topco Solar reserves the final right of interpretation.