



Effetto 14 Square 1 large beam + 1 narrow beam Anthracite gray

Ernesto Gismondi

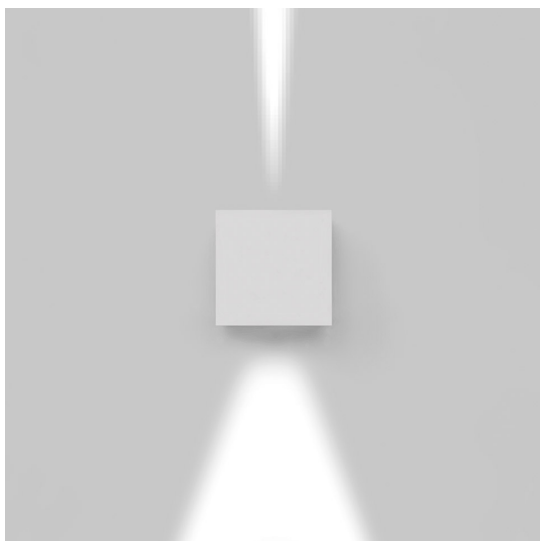

IP65  

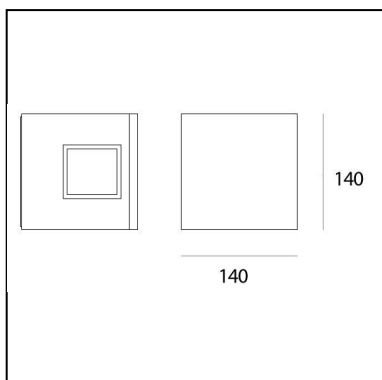

LUMINAIRE

- Power Supply: **Electronic Integrated**
- Watt: **7W**
- Voltage: **220V-240V**
- Delivered lumens output: **73lm**
- CCT: **3000K**
- Efficiency: **16%**
- Efficacy: **10.47lm/W**
- CRI: **0**

Notes

Wiring to be carried out inside the terminal board by piercing an IP65 membrane grommet suitable for cables with a diameter of 6-13 mm.
Painted die-cast aluminium with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint. Effective power 5,4W.

DESCRIPTION

Light fixture with 2 light beams using monochromatic LED light sources characterized by warm colour temperature (3000K) together with light-diffusing lenses which optimize the optical performance of the beams and establish their width. Designed to create geometric lights of scenic effect, it has 1 narrow beam of 15° and 1 large beam of 90°. Wall installation. Composed by lighting cap unit and terminal board fixed together by means of locking dowels. Cap in die-cast EN AB-47100 aluminium. Terminal board in reinforced polymer. Watertight gasket in silicone rubber. Locking dowels used outside the fixture in AISI 316 stainless steel. PMMA lenses siliconed flush with the cap to obtain the beam angle opening.

PRODUCT CODE: T4201NLW20

FEATURES

- Article Code: **T4201NLW20**
- Colour: **Anthracite gray**
- Installation: **Wall**
- Material: **Aluminum, composite technopolymer, methacrylate**
- Series: **Architectural Outdoor**
- Environment: **Outdoor**
- Area contract: **Urban, Outdoor, Residential**
- design by: **Ernesto Gismondi**

DIMENSIONS

- Length: **cm 14**
- Width: **cm 14**
- Height: **cm 14**
- Impact Resistance: **IK10**
- Glow Wire Test: **650°**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **7W**
- Delivered lumens output: **357lm**
- Color temperature (K): **3000K**
- CRI: **80 typ**
- Color Tolerance: **4SDCM**
- Efficacy: **85lm/W**
- Service Life: **L70(14K)>81600**