Ippolito 90
Alessandro Pedretti

IP65 ▢

900
ø200
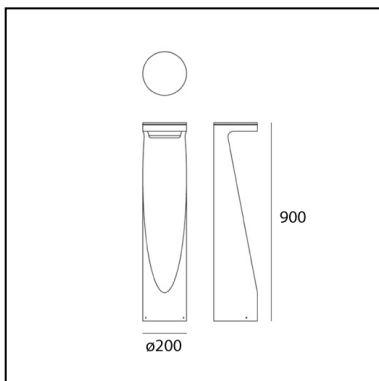
LUMINAIRE

– Watt: **15W**
– Delivered lumens output: **1212lm**
– CCT: **3000K**
– Efficiency: **87%**
– Efficacy: **80.8lm/W**
– CRI: **90**

DESCRIPTION

Light fixture with direct emission, with a uniquehigh-performance monochromatic COB LED. Floor installation. Available in two heights (h 45cm and h 90cm). Composed by support with lamp compartment, lampand ballast compartment. Cylindrical lamp support in engineering polymer (compact polyurethane), with co-molded galvanizedsteel reinforcing elements. Painted with polyurethaneresistant to atmospheric and chemical agents. Fixture head in die-cast EN-AB 47100 aluminium, painted with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint. UV resistant diffuser in transparent shock resistant polycarbonate. Accessory compartment in polymerswith closure cover in AISI 316. Hot galvanized steel mounting plate, with holesfor ground fixing by means of log bolts or dowels. AISI 316 stainless steel screws and siliconeseal gasket. Provided with IP67 cable and connectorfor the mains connection. Technical features of light fixtures in compliancewith EN60598-1. IP Rating IP65. Insulation class II.

PRODUCT CODE: T085000

FEATURES

– Article Code: **T085000**
– Colour: **anthracite grey/light grey**
– Installation: **Floor**
– Material: **Aluminum, polycarbonate, polyurethane**
– Series: **Architectural Outdoor**
– design by: **Alessandro Pedretti**

DIMENSIONS

– Height: **cm 90**
– Diameter: **cm 20**
– Impact Resistance: **IK10**
– Glow Wire Test: **650°**

SOURCES INCLUDED

– Category: **Led**
– Number: **1**
– Watt: **15W**
– Delivered lumens output: **1290lm**
– Color temperature (K): **3000K**
– CRI: **80 typ**
– Color Tolerance: **MacAdam 2SDCM**

Artemide