


STEEL BED FRAMES

TFQK-6 and TFQK-6G

To learn more about your product or its warranty, call 855.581.3095 or visit us online at glideaway.com.

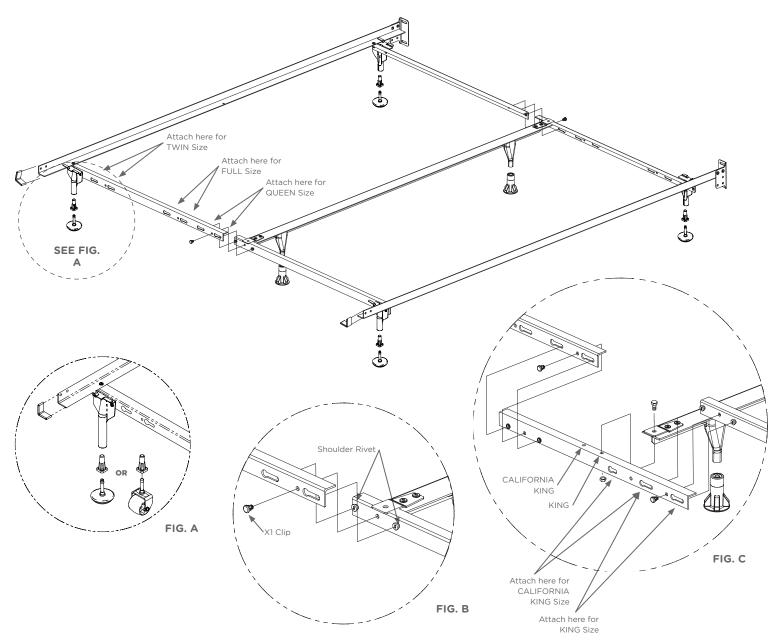

TWIN / FULL / QUEEN

- Swing out cross arms on all corners of the bed frame.
- Install glides to the bottom of all outside legs. (See Fig. A) Install glides to the bottom of center support legs.
- Find the key hole slots that correspond to the bed size you need. Engage rivets into key hole slots and use plastic fastener to secure cross arms into position. (See Fig. B)
- 4. Place center support in center of bed frame into head to toe position.

KING / CALIFORNIA KING

- Swing out cross arms on all corners of the bed frame.
- Install glides to the bottom of all outside legs. (See Fig. A) Install glides to the bottom of center support legs.
- 3. Find the key hole slots that correspond to the bed size you need. Connect extension bar to the main frame assembly using the key hole slots corresponding to the size you are needing. Engage rivets into key hole slots and use plastic fastener to secure into position. (See Fig. C)
- Place center support in center of bed frame in head to toe position. Use nut and bolt to secure into position.