

Bolt-On & Hook-On Bed Rail Assembly Instructions

Use with models: 755-QK, 756-QK, 757-CK, 758-CK

Parts included:


All rails include:

- (1) Center Rail
- (2) Side Rails with Cross Rails
- (2) Middle Connector Rails
- (2) Threaded Glides
- (4) Clamps with Thumbscrews
- (4) Screws
- (4) Thumb Nuts




*Pictured: 755-QK
Bolt-On Bed Rails*

- 1** Set side rails on the ground parallel to each other. Swing out cross rails from the side rails to a 90° angle.

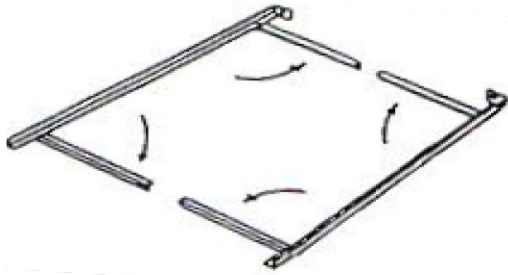

- 2** Slip clamps with thumbscrews over each cross rail. Overlap a middle connector rail over the left and right cross rails and slide the clamps onto the overlap to secure the rails. Do not tighten the thumbscrews. Repeat at the other end of the bed.

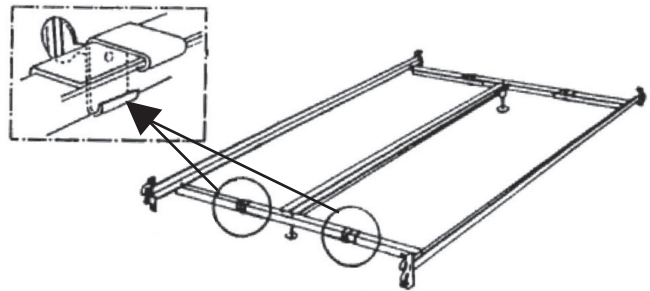


- 3** For bolt-on rails: Adjust to the width of the box spring. Place the rails inside your headboard/footboard. Put the box spring inside. Adjust rails to size. Remove box spring. Using the mounting hardware included with the headboard/footboard, secure the headboard and footboard to the brackets at the head and foot of the bed.

For hook-on rails: Hook the brackets on the rails into the slots on the headboard and footboard.

- 4** Slide the clamps on the overlapped cross rails and middle connector rails so that they are evenly spaced. Tighten thumbscrews to hold the rails to the selected width.



- 6** Thread the stem of the glide foot into the steel socket of the leg on the center rail. Repeat with the other glide and leg.

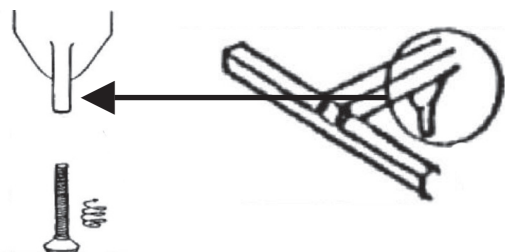

- 7** Attach the center rail to the cross rails. Line up the holes at the end of the center rail with the holes in the middle of the cross rail. Insert screws through the center rail and into the first and third holes on the cross rail. Secure with thumb nuts. Repeat on the other side.

