



# SUPER ANCHOR SAFETY®


## Hinge-2 No.3013-D Installed Over Asphalt Shingles

Hinge-2 may be installed over existing asphalt shingles provided the WS screw depth into the top chord is a min. of 2" as shown at Fig.1.

### Specifications

- Max. 7/8" asphalt shingle thickness
- Use 3-1/2" No.2084-3.5 WS screw
- WS screw centered over top chord as shown at Fig. 1

**WARNING! DO NOT use nails for Hinge-2 HLL systems.**

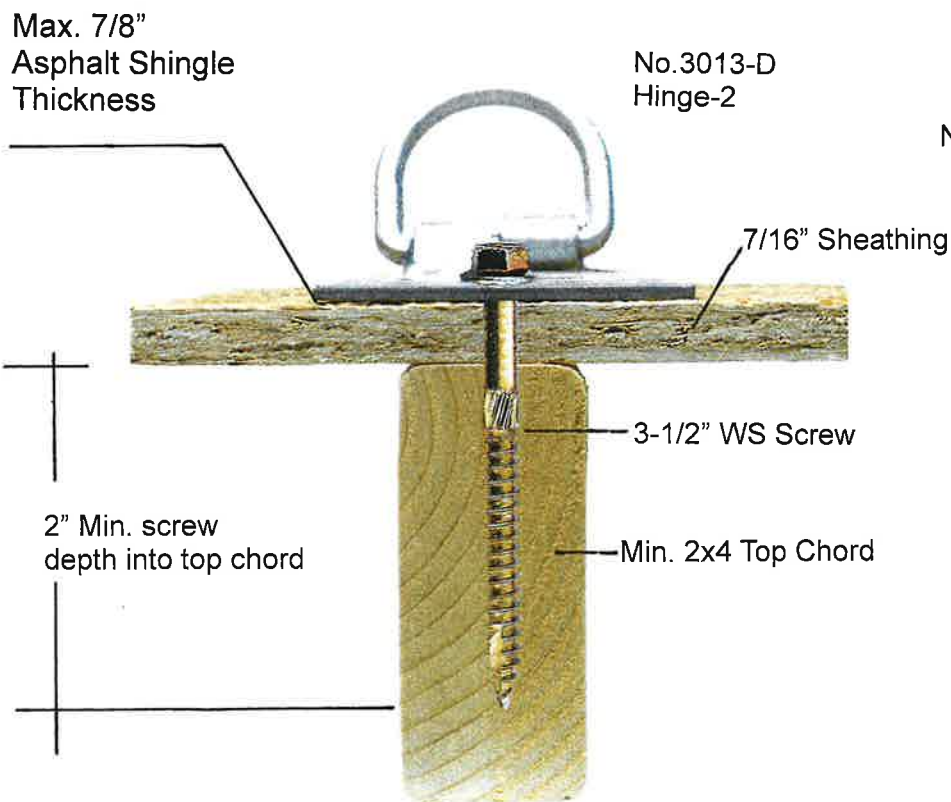

No.2084-3.5 WS Screws



No.2032-X (GM tip) HeadLoK Screw



**Note:**  
For asphalt shingle thicknesses greater than 7/8", use No.2032-X HeadLoK screws specified for the min. top chord penetration of 2". Contact sales team.