



SPEC SHEET



ST14AH Aluminum I-Beam Bantam Beamer for 3.5" - 14"

Design Specifications

A removable and reusable sliding I-beam anchor, easy to place and remove

This anchor is designed to easily glide along the beam while trailing the worker


Adjustable from 3.5" - 14"

Flange Size: 0.25" - 1.25" (Minimum flange thickness of 0.25")

Material Specifications

Swivel Mount	Stainless Steel
Swivel	Zinc Plated Steel
Clamps	Bronze
Support Bar	Aluminum
Rollers	Nylon

ACCEPTABLE INSTALLATION ORIENTATIONS

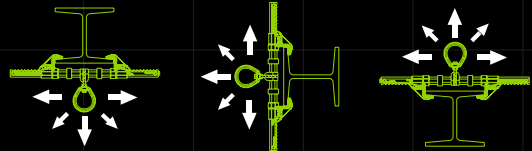

Performance Specifications

Tensile Strength	5,000-lbf / 22kN
Max User Weight	310-lbs / 140kg
Working Load	1,000-lbs / 454kg

Relevant Standards

ANSI	Z359.1-2007
	Z359.7-2011
OSHA	CFR 1926.502
	CFR 1910.140

WARNINGS:

- Do not skip user instructions supplied with this product.
- Alteration or misuse of this product or failure to follow instructions may lead to serious injury or even death.



info@frontlinefall.com

www.frontlinefall.com
© 2019

2023 NW 84th Ave, Miami FL, 33122