



SPEC SHEET

COB345KSV

Reusable Concrete Anchor 5k with Swiveling D-Ring

Design Specifications

A removable and reusable anchor designed to work in 3/4" (20 mm) drilled hole in concrete substrates.

Includes swiveling d-ring for better functionality.

Material Specifications

Spoons	Stainless Steel
Stop Sleeve	
Cone	
Cleaning Bushing	Zinc Plated Copper
Spring	
Swage	
Anchor Loop	Aluminum
Trigger	
Main Cable	
Return Wire	Aircraft Cable

Performance Specifications

Breaking Strength	5,000-lbf / 22kN
Max User Weight	310-lbs / 140kg
Working Load	1,000-lbs / 454kg


Relevant Standards

ANSI	Z359.1-2007
	Z359.7-2011
OSHA	CFR 1926.502
	CFR 1910.66
EN	795



HOLE DRILLING REQUIRMENT CHART

(A)" Minimum distance from edge/corner	(B)" Concrete thickness
6" (15.3 cm)	12" (30.5 cm)
12" (30.5 cm)	5" (12.7 cm)

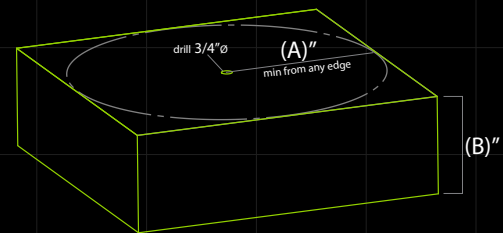

WARNINGS:

- Do not skip user instructions supplied with this product.
- Alteration or misuse of this product or failure to follow instructions may lead to serious injury or even death.

