

RPW062R Web 6ft SRL with Steel Rebar Hook Ends

Design Specifications

Robust & durable plastic casing

Quarter turn locking steel Carabiner with Twin SRL connector

Swivel steel rebar hook at attachment ends

Technora Webbing with Shock Absorber

Length (Ea) 6ft. (1.8 m)

Webbing Thickness 13/16"

Total Weight 7.9 lbs. (3.5 Kg)

ANSI Performance Specifications

Connector Strength 5,000 lbs.

Max. Capacity 310 lbs.

Max. Arrest Distance 24" CLASS A

Avg. Arrest Force (Ea) <1,800 lbs.

Web Min. Breaking Strength 4,500 lbs.

Relevant Standards

OSHA CFR 1926.502

CFR 1910.140

ANSI Z359.14-2021

A10.32-2012

✔ *Almost Pocket Size*



✔ *Lightest Available in It's Class*

WARNINGS:

- Do not skip user instructions supplied with this product.
- Alteration or misuse of this product or failure to follow instructions may lead to serious injury or even death.



FRONT VIEW

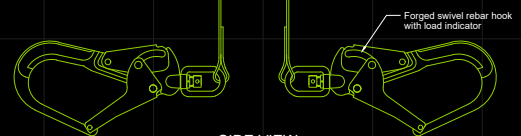

SIDE VIEW

2.55"

Polyester Webbing