

# SPEC SHEET

## Aluminum I-Beam Fixed Anchor



### ST18AV

#### Features

Constructed out of aluminum material making it extremely lightweight

Installs in just seconds by easily adjusting the turn locking adjusters to I-Beam width

D-ring is centered on the anchor and moves vertically or horizontally for free movement

Can be used with either a self retracting lifeline or a shock absorbing lanyard

Fits I-beams from 4" wide and adjust up to 18" wide I-beams

The anchor can be conveniently adjusted from both sides for a secure fit

Tensile Strength	5,000 lbs
------------------	-----------

Max. Capacity	425 lbs
---------------	---------

#### Material Specifications

Hex Bar	Aluminum Alloy
---------	----------------

Jaws	Aluminum Alloy
------	----------------

D-ring assembly	Alloy Steel
-----------------	-------------

#### Relevant Standards

ANSI	Z359.18
------	---------


Z359.7
--------

OSHA	1926.503
------	----------

1910.140
----------



ST18AV

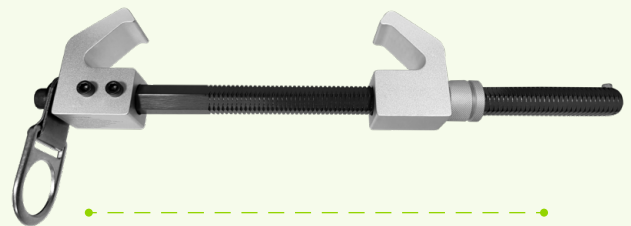

Beam flange width ranging: 4" - 18"

WEIGHT: 5 LBS

**FRONTLINE**  
FALL PROTECTION

www.frontlinefall.com info@frontlinefall.com  
2023 NW 84th Ave, Miami FL, 33122