SPEC SHEET

TANO 7
MEGApod 7' Aluminum Tripod

Design Specifications

Adjustable Height: 49.21" (1.25 m) - 88.18" (2.24 m)

Distance Between Legs:

At minimum tripod height: 47.63" (1.21 m) At maximum tripod height: 78.74" (2 m)

Height adjustment achieved by sliding telescopic legs

Includes two eyebolts for personal protective equipment attachment

Two pulley system provided to pass the wire rope of winch mounted on one leg and retrieval block on the other leg simultaneously


> Includes mounting brackets for winch and retrieval system installation

Material Specifications

Tripod Material	Prime Quality Aluminum Alloy
Tripod Legs Finish	Anodized
Tripod Head Finish	Powder Coated
Locking Pins Finish	Polished
Locking Pins Material	Stainless Steel
Load Capacity	310 lbs.
Weight	42 lbs.

Relevant Standards

OSHA	1926
	1910
ANSI	Z359.1-2007
EN	795:2012 Type B

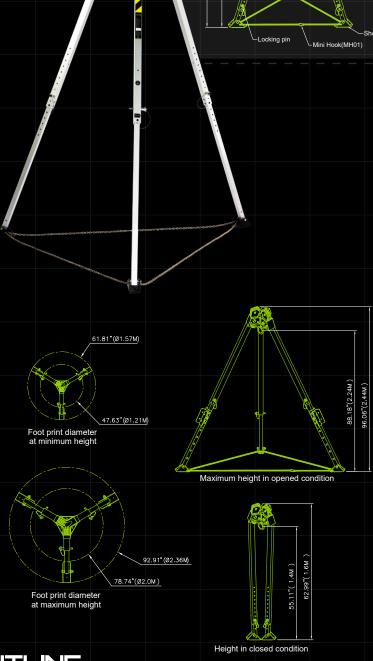

WARNINGS:

 \cdot Do not skip user instructions supplied with this product.

Alteration or misuse of this product or failure to follow instructions may lead to serious injury or even death. info@frontlinefall.com

SPEC SHEET

RUW60 MEGApod 60' Confined Space Winch with Galvanized Steel Cable

Design Specifications

Includes mounting plate having two pin locking bolts for mounting to MEGApod tripod leg

Comes with rugged and long-lasting galvanized steel wire rope of 15/64" diameter

Includes swiveling steel snaphook as a connector for better mobility and user harness connection

Material Specifications

Cable Galvanized steel wire Cable Length 60 ft. (18.28m) 15/64" Cable Diameter Galvanized Steel **Body Material Rated Load Capacity** 310 lbs. Weight 39 lbs.

Relevant Standards

ANSI Z359.4-2013 CFR 1926 **OSHA** CFR 1910

info@frontlinefall.com



WARNINGS:

Do not skip user instructions supplied with this product. •Alteration or misuse of this product or failure to follow instructions may lead to serious injury or even death.