

# SPEC SHEET

## TAN10 MEGApod 10' Aluminum Tripod

#### **Design Specifications**

Adjustable Height: 71.65" (1.82 m) - 92.91" (2.36 m)

Distance Between Legs: At minimum tripod height: 58.26" (1.48 m) At maximum tripod height: 98.42" (2.5 m)

Height adjustment achieved by sliding telescopic legs

Includes two eyebolts for personal protective equipment attachment

Two pulley system provided to pass the wire rope of winch mounted on one leg and retrieval block on the other leg simultaneously

> Includes mounting brackets for winch and retrieval system installation

### **Material Specifications**

Tripod Material	Prime Quality Aluminum Alloy
Tripod Legs Finish	Anodized
Tripod Head Finish	Powder Coated
Locking Pins Finish	Polished
Locking Pins Material	Stainless Steel
Load Capacity	310 lbs.
Weight	52.5 lbs.

### **Relevant Standards**

OSHA	1926
	1910
ANSI	Z359.1-2007
EN	795:2012 Type B



79.13"(2.01m)

Height in close condition

37.0"

Pulley

Aluminum cast head



#### WARNINGS:

Do not skip user instructions supplied with this product.
Alteration or misuse of this product or failure to follow instructions may lead to serious injury or even death.

info@frontlinefall.com

www.frontlinefall.com © 2019

2023 NW 84th Ave, Miami FL, 33122

98.42"(2.50m)

Foot print diameter at maximum height

# - SPEC SHEET

#### RUW60 MEGApod 60' Confined Space Winch with Galvanized Steel Cable Design Specifications

Includes mounting plate having two pin locking bolts for mounting to MEGApod tripod leg

Comes with rugged and long-lasting galvanized steel wire rope of 15/64" diameter

Includes swiveling steel snaphook as a connector for better mobility and user harness connection

### **Material Specifications**

Cable	Galvanized steel wire	
Cable Length	60 ft. (18.28m)	
Cable Diameter	15/64"	
Body Material	Galvanized Steel	
Rated Load Capacity	310 lbs.	
Weight	39 lbs.	
Relevant Standards		
ANSI	Z359.4-2013	
	CFR 1926	
OSHA	CFR 1910	
S: o user instructions supplied with	FRON	

info@frontlinefall.com



WARNING

 Do not skip user instructions supplied wit this product.
 Alteration or misuse of this product or

ailure to follow instructions may lead to serious injury or even death.



www.frontlinefall.com

2023 NW 84th Ave, Miami FL, 33122



## SPEC SHEET

# RPG603W <sup>60' 3-Way Self</sup> Retractable Lifeline with Retrieval System

#### **Design Specifications**

Retrieval fall arrester block in polymer casing coupled with hoisting winch to enable easy retrieval of victim

The locking pin on the side of the casing at the base of the handle allows this dual system to work in independent fall arrest & winch mode


Can be easily mounted on the leg of the MEGApod system with specialized bracket (TACBU)

### **Physical Parameters**

Has swivel anchorage eye at anchorage end Swivel steel snap hook with load Indicator at attachment end Robust & durable plastic casing

### **Material Specifications**

Cable	Galvanized steel wire rope	
Cable Length	60 ft. (18.28m)	
Cable Diameter	3/16"	
Min. Breaking Strength	3,400 lbs	
Weight	20.3 lbs	
Relevant Standards		
ANSI	Z359.14-2014	
OSHA	CFR 1926	
	CFR 1910	
NGS:	FRO	

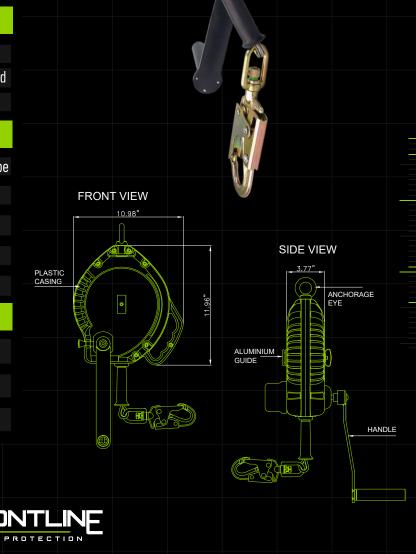

#### WARNIN

Do not skip user instructions supplied with this product.
 Alteration or misuse of this product or failure to follow instructions may lead to serious injury or even death.

www.frontlinefall.com © 2019

FALL

2023 NW 84th Ave, Miami FL, 33122