




® Supplemental Instruction to Self Retracting Lifelines

Use this Supplemental Instruction with Self Retracting Lifeline User Instruction Manual 5902101.

This supplement contains information that applies to Ultra-Lok Leading Edge SRL instruction form no 5902101 as follows: DESCRIPTIONS, Section 1.0 APPLICATIONS, Section 3.0 OPERATION AND USE, Section 5.0 INSPECTION, and Section 7.0 SPECIFICATIONS.

DESCRIPTIONS

LEADING EDGE SELF RETRACTING LIFELINES: Includes swivel eye anchorage, self-locking swivel snap hook with impact indicator, integral shock pack, and 30-foot galvanized wire rope lifeline.

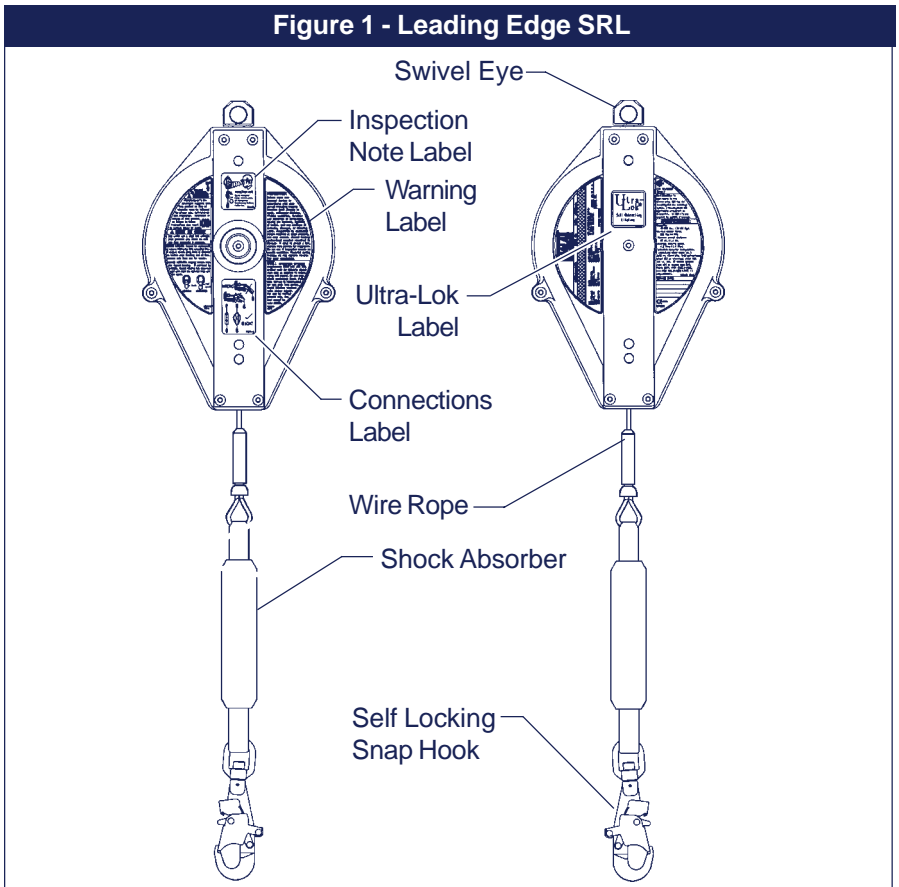

1.0 APPLICATIONS


1.1 PURPOSE: DBI/SALA 3504500 Self Retracting Lifeline is designed for use in applications where falls may occur over an edge, such as roofing, leading edge construction, etc. This model is especially suited for use with fall arrest systems using DBI/SALA anchorage connectors intended for leading edge work, such as 2105500 Leading Edge Tripod Anchor, 2103675 Standing Seam Roof Anchor, 2105683 Swiveling Roof Anchor, etc.

3.0 OPERATION AND USE

Sharp Edges: Avoid working where the lifeline will be in contact with or abrade against unprotected sharp edges. Even though this model provides additional protection from falls occurring over edges, protection against cutting must be provided by using a heavy pad or other means over the exposed sharp edge.

5.0 INSPECTION

Webbing and Stitching: The 3504500 Self Retracting Lifeline incorporates an integral energy absorbing component. Inspect the energy absorber to determine if it has been activated. There should be no evidence of elongation. See Figure 2. Ensure energy absorber cover is secure and not torn or damaged. If inspection reveals an unsafe condition, remove unit from service immediately and destroy, or contact an authorized service center for repair.

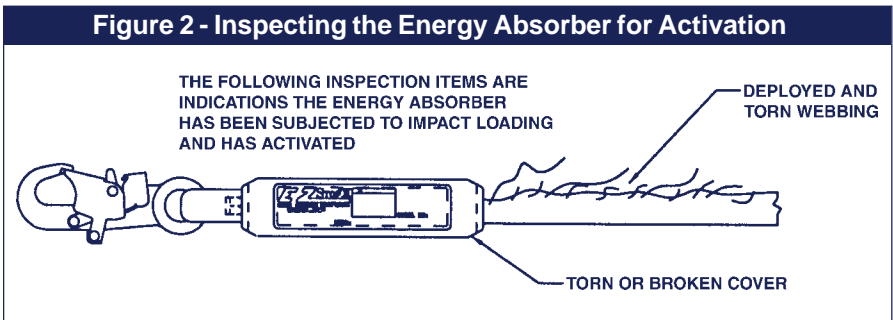

7.0 SPECIFICATIONS

Table 1 - Ultra-Lok Wire Rope SRL

Model No.	Working Range	Lifeline Type	Hook Model	Size (LxWxH)	Weight
3504500	30 feet	Galvanized Wire Rope	9500100	12.65x7.92x3.63	16 lbs

Housing: Reinforced urethane

Drum: Aluminum

Side Plates: Aluminum

Fasteners and Locking Pawls: Stainless steel

Main Shaft: Stainless steel

Finish: Anodized aluminum components

Lifeline: 7/32-inch diameter galvanized wire rope, 5600 lb. minimum tensile strength

Energy Absorber: Nylon/Polyester web

WARRANTY

Equipment offered by DBI/SALA is warranted against factory defects in workmanship and materials for a period of two years from date of installation or use by the owner, provided that this period shall not exceed two years from date of shipment. Upon notice in writing, DBI/SALA will promptly repair or replace all defective items. DBI/SALA reserves the right to elect to have any defective item returned to its plant for inspection before making a repair or replacement. This warranty does not cover equipment damages resulting from abuse, damage in transit, or other damage beyond the control of DBI/SALA. This warranty applies only to the original purchaser and is the only one applicable to our products, and is in lieu of all other warranties, expressed or implied.



USA

3965 Pepin Avenue
Red Wing, MN 55066-1837
Toll Free: 800-328-6146
Phone: (651) 388-8282
Fax: (651) 388-5065
www.salagroup.com

Canada

260 Export Boulevard
Mississauga, Ontario L5S 1Y9
Toll Free: 800-387-7484
Phone: (905) 795-9333
Fax: (905) 795-8777
www.salagroup.com

This manual is available for download at www.salagroup.com.



Certificate No. FM 39709

Form: 5902225
Rev: A