

DBI
SALA

NEW



Weather
tight cap
protects
and
conceals
the anchor

Our best selling roof anchor just got better for the contractor and homeowner with the addition of a weather tight cap!

- Weather tight cap protects the anchor from corrosion by sealing it from the environment
- The cap hides the anchor providing the homeowner with an aesthetically pleasing roof line
- Thermoplastic constructed flashing prevents leakage at the point of sheathing penetration
- Provides a fall protection anchor point during initial construction as well as for the future homeowner for routine roof maintenance
- Rated for 5,000 lbs. for use with a personal fall arrest system


Permanent Roof Anchor with Cap

Ultimate Protection with an Industry Proven Roof Anchor Our permanently installed roof anchor has been industry tested for almost a decade, and has proven to be a simple and safe residential and light commercial construction solution. This anchor can have significant impact on jobsite safety while reducing injuries and costly insurance company claims. The unique design provides workers with a fall protection anchor during initial construction, as well as the homeowner for future roof maintenance.

Provides Contractor and Homeowner Peace-of-Mind Our unique thermoplastic constructed flashing remains functional for the service life of the roofing material and prevents leakage at the point of sheathing penetration. The new weather tight cap protects the anchor from corrosion by sealing it from the environment. In addition, the cap hides the anchor on the roof so it doesn't jeopardize the curb appeal of the home. The flashing and cap are tabbed to allow them to be teathered together.

Simple, Fast and Efficient Installation This roof anchor can be installed onto many different roof member sizes. In addition, it can be mounted before or after the sheathing is installed. The model 2103670 fits roof members up to 2x8, the 2103671 fits 2x10 to 2x12 roof members. Please refer to the user instruction manual for complete installation details.

Standards and Warranty Reliability that saves you worry, time and money. Complies with OSHA requirements. The reputation of DBI/SALA stands behind every one of our products supported by a two year warranty on parts and workmanship.

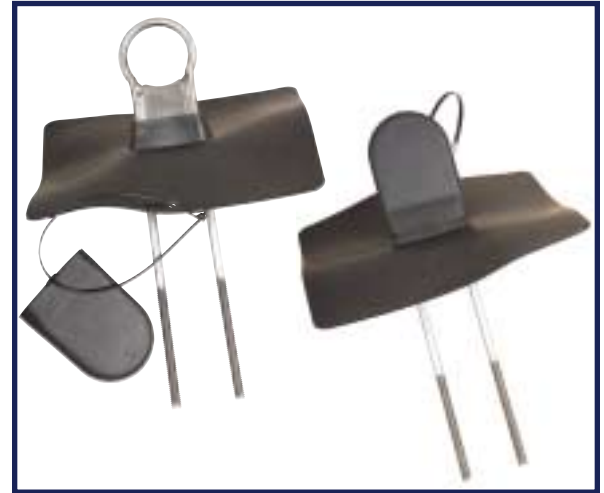

Permanent Roof Anchor with Cap:

- 2103670: U-bolt roof anchor w/ weather tight cap, fits up to 2x8
- 2103671: U-bolt roof anchor w/ weather tight cap, fits 2x10 to 2x12
- 9501572: Cap Only for U-bolt style roof anchor

Specifications:

Material: Stainless Steel Construction

Capacity: 310 lbs.


Weight: 2103670 = 1.6 lbs., 2103671 = 1.9 lbs.

Size: 2103670 = 3/8" x 3" x 13-7/8"
2103671 = 3/8" x 3" x 17-3/4"


Minimum Breaking Strength: 5,000 lbs. - rated for fall arrest

Compliance: OSHA 1926.502

Installation On Top of Roof Sheathing

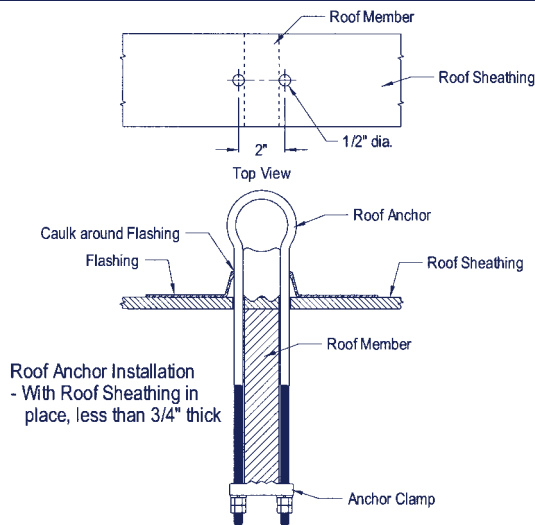

Installation Through Roof Sheathing

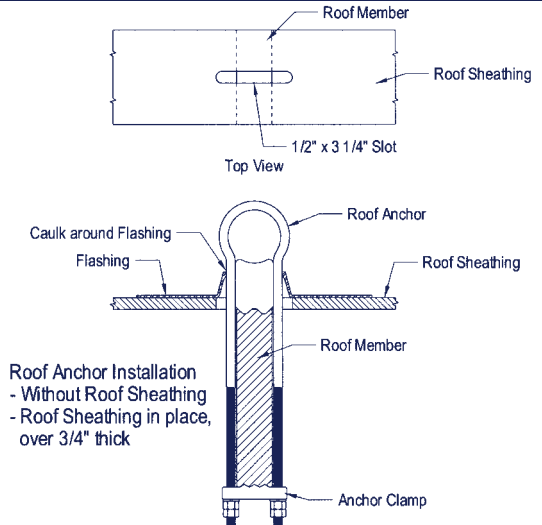

ISO 9001 - With a full quality assurance program certified under ISO 9001, DBI/SALA and Protecta supplies the industry with a quality range of safety products to provide added security. That's why we back each of our fall protection and rescue systems with the best training, tech assistance and customer service in the business. It makes life easier for you and safer for your workers.



DBI/SALA & Protecta • 3965 Pepin Avenue Red Wing, MN 55066
 Phone: 651-388-8282 • Fax: 651-388-5065
 Toll Free US: 800-328-6146 • Toll Free Canada: 800-387-7484
 www.dbisala.com • Email: solutions@dbisala.com

Form: 9700088 Rev: A