


# PRODUCT SPECIFICATIONS

## 6501528 3pc Vehicle Hitch-mount Base

Vehicle Hitch-mount Base installs to a Class 3 vehicle hitch receiver with 2" square receiver socket making the vehicle a functional and effective portable anchor point. For use with 12" to 29" Davit Arm and Mast Extension. Features vertical height adjustment range of 11" up to 36"

### Features:

- Vehicle Hitch-mount Base is for use with 12" to 29" Davit Arm and Mast Extensions
- 3pc Vehicle Hitch-mount Base consists of a horizontal Foot Bar assembly, vertical Adjustment Post and square Hitch Bar with Mast sleeve and PVC insert
- Installs to Minimum Class 3 vehicle hitch with 2" square receiver socket
- Features vertical height adjustment range of 11" up to 36"

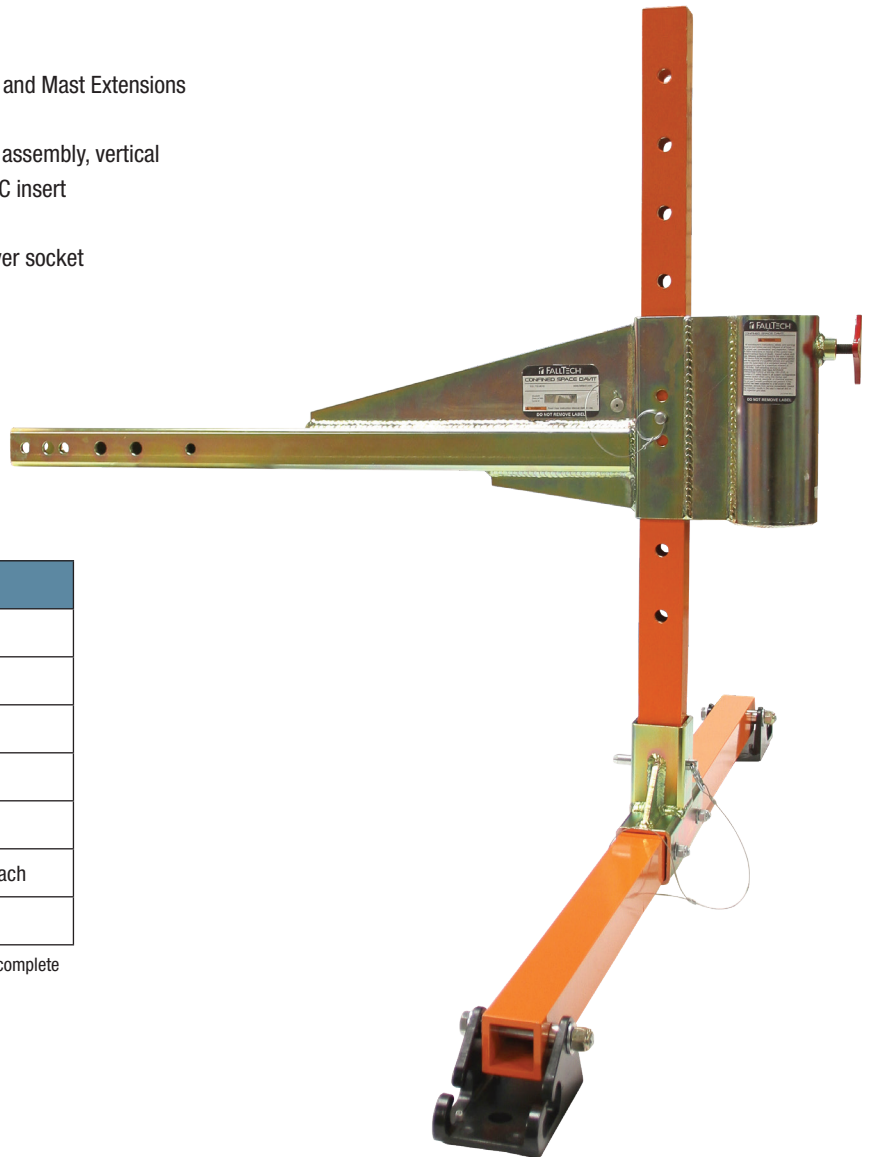

System Performance Specifications	
Minimum Strength Ratings by Use **	
<b>Moment Rated:</b>	5,750 lbs. Minimum
<b>Rescue Configuration:</b>	5,000 lbs. Minimum
<b>Entry/Egress Operation:</b>	1,800 lbs. Minimum
Number of Users and Weight Capacities	
<b>Rescue Configuration:</b>	2 Users Max. 310 lbs. each
<b>Entry/Egress Operation:</b>	1 User Max. 310 lbs.

\*\* Specifications shown above are for complete System; see Owner's Manual for complete table of Minimum Load Ratings

Materials	
<b>Foot Bar Assembly:</b>	Powder Coated 6061 Aluminum and Zinc Plated Steel
<b>Vertical Adjustment Post:</b>	
<b>Hitch Bar with Mast Sleeve:</b>	

Relevant Standards	
<b>OSHA:</b>	1926.502 when used with Davit Arm and Mast Extensions

### WARNINGS

- Read, understand and follow all labels and instructions prior to use.
- Inspect before each use.
- Remove from service if there is evidence of damage or excessive wear.
- Never connect an Energy Absorbing Lanyard to Hip D-Rings.