


DIABLO CABLE TIE-BACK SRL-LE

SELF-RETRACTING LIFELINE

TECHNICAL DATA & SELL SHEET - ISSUE 1

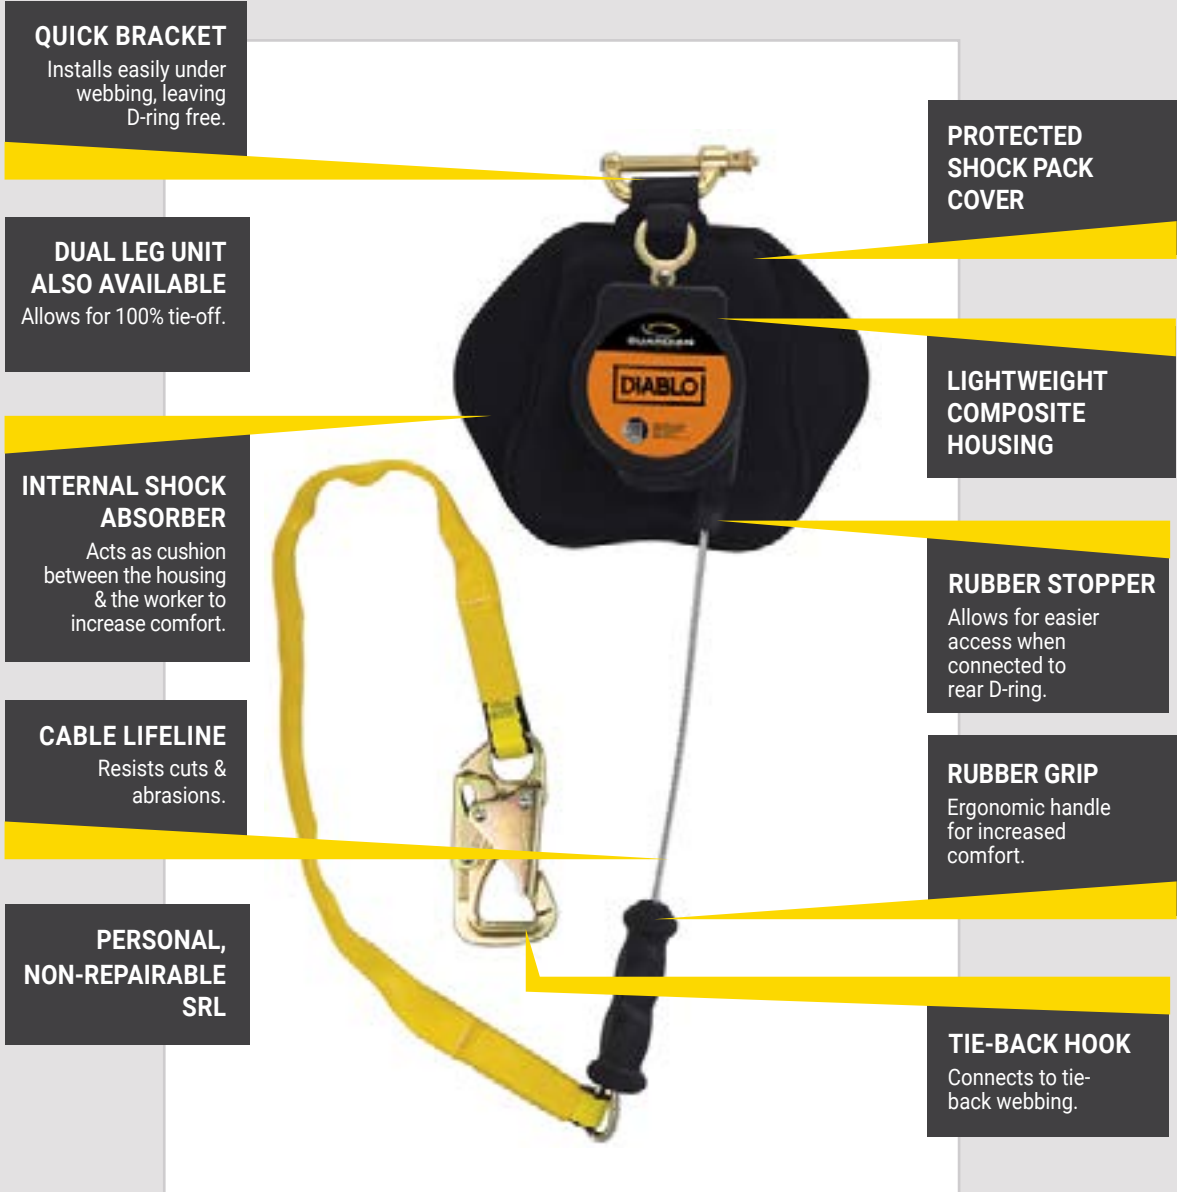

QUICK BRACKET

Installs easily under webbing, leaving D-ring free.

PROTECTED SHOCK PACK COVER

DUAL LEG UNIT ALSO AVAILABLE

Allows for 100% tie-off.

LIGHTWEIGHT COMPOSITE HOUSING

INTERNAL SHOCK ABSORBER

Acts as cushion between the housing & the worker to increase comfort.

RUBBER STOPPER

Allows for easier access when connected to rear D-ring.

CABLE LIFELINE

Resists cuts & abrasions.

RUBBER GRIP

Ergonomic handle for increased comfort.

PERSONAL, NON-REPAIRABLE SRL

TIE-BACK HOOK

Connects to tie-back webbing.

Lifeline: 3' x 1" Polyester Webbing & 8' x 3/16" Galvanized Steel Cable

Hook: Galvanized Steel

Housing: High-Strength ABS

Capacity for LE: 130-310 lbs.

Capacity for Non-LE: 130-420 lbs.

FOR MORE INFO, PLEASE CALL **1.800.466.6385** OR VISIT **GUARDIANFALL.COM**

DIABLO CABLE TIE-BACK SRL-LE

SELF-RETRACTING LIFELINE

TECHNICAL DATA & SELL SHEET - ISSUE 1

Standards

- OSHA 1910
- OSHA 1926 Subpart M



Performance:

- Max. Arrest Force: 1,800 lbs.
- Maximum Users: 1
- Length: 8' (+ 3' Tie-back webbing)
- LE-Use Clearance Requirements: 17'
- Non-LE-Use Clearance Requirements: 7.5"

Notes:

- Do not tie-back onto the retractable section. When used in a non-tie back format, the lifeline must always be used in tension
- Always maintain 100% tie-off
- For dual leg kit, assemble and use according to instructions provided with dual SRL bracket

Applications



Personal Fall Arrest: Diablo Cable Tie-back SRL-LEs may be used in Personal Fall Arrest applications to support a maximum of 1 Personal Fall Arrest System (PFAS). Structure must withstand loads applied in the directions permitted by the system of at least 5,000 lbs. Maximum permitted free fall is 2' (SRL may be positioned no more than 2' below harness dorsal D-ring or 2' above anchor point). Applicable D-rings: Dorsal.



Restraint: Diablo Cable Tie-back SRL-LEs may be used in Restraint applications. Restraint systems prevent workers from reaching the leading edge of a fall hazard. Always account for fully deployed length of SRL. Structure must withstand loads applied in the directions permitted by the system of at least 1,000 lbs. No free fall is permitted. May only be used on surfaces with slopes up to 4/12 (vertical/horizontal). Applicable D-rings: Dorsal, Chest, Side, & Shoulder.

HOOK TYPES



Tie-Back Hook

Prod. Code	Description	Length
11108	Diablo Cable Tie-back SRL-LE with a Steel Tie-Back Hook	8' (+ 3' Tie-back Webbing)
11109	Double Diablo Cable Tie-back SRL-LE with Steel Tie-Back Hooks	8' (+ 3' Tie-back Webbing)

FOR MORE INFO, PLEASE CALL **1.800.466.6385** OR VISIT **GUARDIANFALL.COM**