



The Most  
Affordable and  
Easy-to-Install  
Permanent  
Roof Anchor on  
the Market

*A permanent roof anchor that combines ease-of-installation with performance, safety & exceptional value!*

- Permanently installed anchor is shingled-over leaving only the D-ring exposed
- Provides a fall protection anchor point during initial construction as well as for the future homeowner for general roof maintenance
- Ideal for new or retrofit construction on roofs with asphalt, shake or tile roofing materials
- Stainless steel construction and zinc plated steel D-ring resist corrosion for extended life
- Rated for 3,600 lbs. for use with a personal fall arrest system

**Ultimate Protection and Safety** Our permanently installed roof anchor has proven to be a simple and safe residential and light commercial construction solution. This anchor can have significant impact on jobsite safety while reducing injuries and costly insurance company claims. The unique design provides workers with a fall protection anchor during initial construction, as well as the homeowner for future roof maintenance.

### Provides Contractor and Homeowner Peace-of-Mind

The stainless steel and zinc plated constructed anchor remains functional for the service life of the roofing material. In addition, because the anchor is shingled-over leaving only the D-ring exposed, it prevents leakage and doesn't jeopardize the curb appeal of the home.

**Simple, Fast and Efficient Installation** The roof anchor is quickly installed by first nailing into place through sheathing and truss on the roof or peak using the eight 20d sinker nails supplied. Then the anchor is bent-over to conform with the roof line and fixed into its final place with one 20d sinker nail. Please refer to the user instruction manual for complete installation details.

### Standards and Warranty

Reliability that saves you worry, time and money. Complies with OSHA 1926.502 requirements. The reputation of Protecta stands behind every one of our products supported by a two year warranty on parts and workmanship.

#### Roof Anchor Models:

2103678: Permanent Roof Anchor, stainless steel, single D-ring, nine 20d sinker nails

#### Specifications:

**Material:** Stainless Steel Strap with Zinc Plated Steel D-ring

**Nails:** 9 Sinker 20d Nails

**Capacity:** 310 lbs. (139.5 kg)


**Weight:** .8 lbs. (.36 kg)

**Size:** 16.5" (41.25 cm) Long x 2" (5 cm) Wide



**Minimum Breaking Strength:** 3,600 lbs. - rated for fall arrest

**Compliance:** OSHA 1926.502

#### Installation Steps

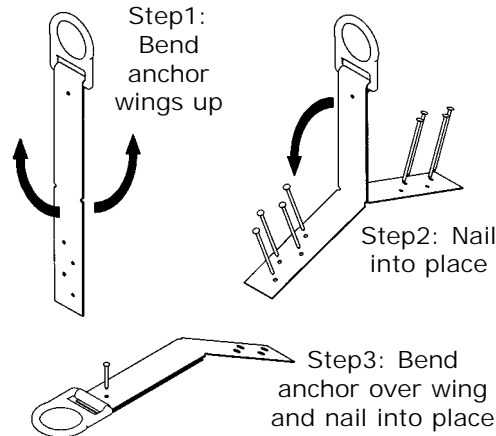

#### Roof Anchor Placement

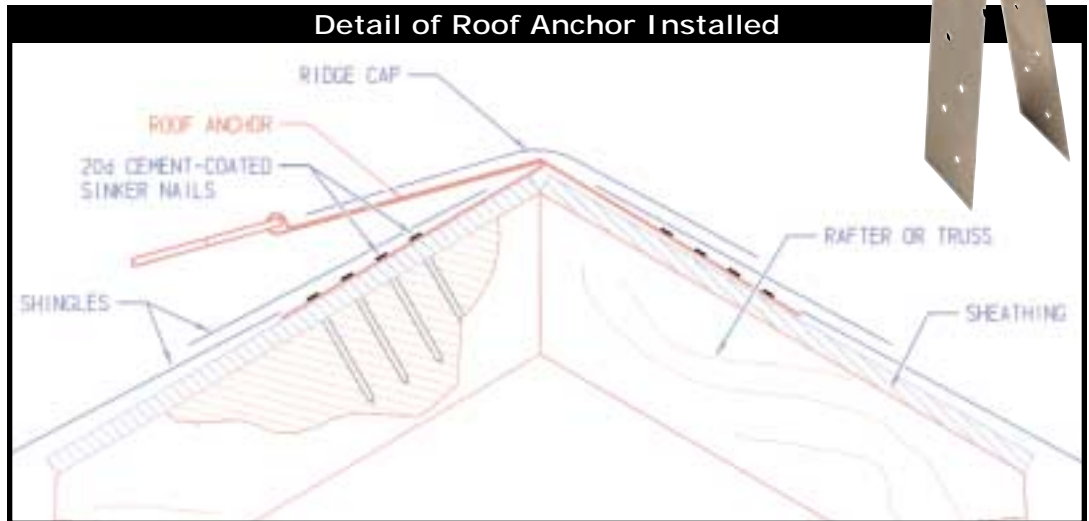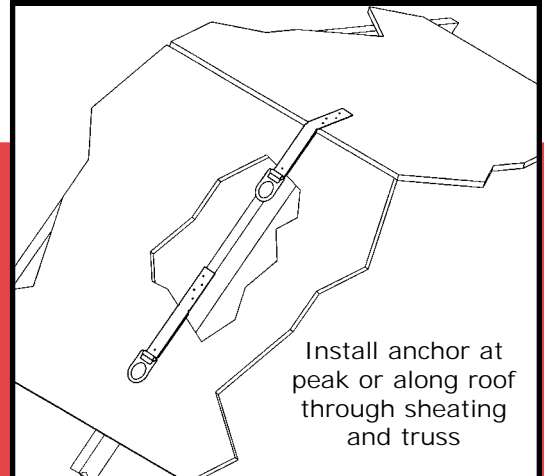

ISO 9001 - With a full quality assurance program certified under ISO 9001, DBI/SALA and Protecta supplies the industry with a quality range of safety products to provide added security. That's why we back each of our fall protection and rescue systems with the best training, tech assistance and customer service in the business. It makes life easier for you and safer for your workers.



DBI/SALA & Protecta • 3965 Pepin Avenue Red Wing, MN 55066

Phone: 651-388-8282 • Fax: 651-388-5065

Toll Free US: 800-328-6146 • Toll Free Canada: 800-387-7484

www.protecta.com • Email:solutions@protecta.com

Form: 9700091 Rev: A