

INCREASING PERFORMANCE

**WELD DYNAMIX**

IN WELDING ENVIRONMENTS

## WCA-1204-MXAH



### FIELD ATTACHABLE CONNECTOR - MALE

TERMINATION – SCREW TERMINALS

NUMBER OF PINS 4

UL FILE E363587

OPERATING VOLTAGE

OPERATING VOLTAGE UB MAX 250V

OPERATING CURRENT IB 4A

TEMPERATURE -40 TO 190 DEGREES F



ENVIRONMENTAL RATING IP67

BODY MATERIAL ZINC

CABLE DIAMETER RANGE 5MM – 8MM

CONTACT SURFACE GOLD

 **ACTIVSTONE™** WELD RESISTANT COATING

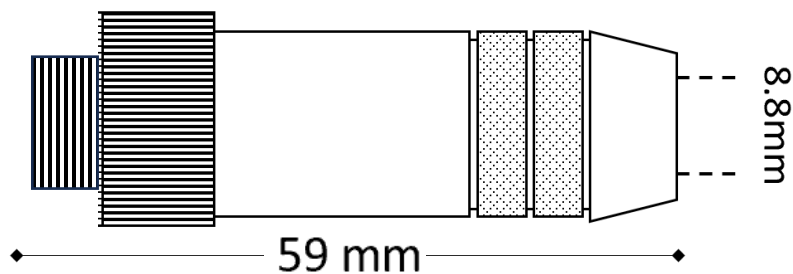

M12 X 1  
A CODED