Revolution SVR Wing Series Assembly Instructions





FOR QUICK & EASY 3D ASSEMBLY INSTRUCTIONS

Step 1: Search for BILT Instructions and download the free BILT app.

Step 2: Once in the BILT app, search your Killerspin table model in the BILT app search bar.

Step 3: Begin easy assembly of this product using the BILT 3D-guided interactive instructions.



TABLE MODEL

Safety

- 1. Do not stand or sit on the table.
- 2. The table is heavy. Assembly requires two adults. Follow all assembly instructions carefully.

3. Make sure to position the table in an area where there is sufficient space to play so players will not be harmed by surrounding objects while playing.

Maintenance

1. The table is designed for indoor use only and should be kept in a ventilated space away from: direct sunlight, extensive humidity, high temperatures, corrosive environments, and rain.

2. Proper care and maintenance of your table's surface is required for long term performance. Over time, your table's playing surface can build up layers of dirt and grime. You can protect your investment with the Killerspin table tennis surface cleaner - MyT Clean.

3. MyT Clean helps maintain superior conditions for optimal play. It removes the dust, dirt, grease and fingerprints that can build up and make your table look worn. Keep your table tennis surface clean for the best bounce, and maximum shot control.

4. Children's use should be properly supervised.

Tools



TABLE MODEL

Part List

- 1. Lay the boxes on a smooth, clean surface.
- 2. Open the lid and check to make sure you have all the parts:




Table Top x2



Levelers x4



Net-post Set x1



TABLE MODEL

Assembly


Please read carefully. Assembly requires two adults.



1. The table top has 2 pieces. Please put each piece of the table top facing down on a clean and flat carton. Please make sure that the carton surface is clean to avoid abrasion during asembling.



2. Pull on the supporting leg knob (picture #2a) to unfold the supporting leg (picture #2) Push up until you hear click to make sure the leg is securely positioned. Repeat steps to unlock the second supporting leg.



3. Pull on the arch-shaped leg knob (picture #3a) to unfold (picture #3). Push up until you hear click to make sure the arch-shaped leg is securely positioned. Repeat steps to unlock and set up the other arch-shaped leg.






TABLE MODEL

4. Screw the black adjustable levelers at the end of both arch-shaped legs as shown on pictures.



5. Pull up the supporting arch in between the side legs by opening the safety pin with red cap (picture #5a)



6. Push the supporting arch on to the bolts on the inside of the arch-shaped legs to lock the arch-shaped legs.







TABLE MODEL

7. Repeat the steps 1-6 for the second half of the table.



8. Turn over both pieces of the table one by one and make sure that the table is standing on its legs.




9. To connect the two table halves, move the two tables tightly together, press handle (picture #9a), which is located underneath the table top by the inside of the arch-leg, towards metal frame to unlock the safety pin and release/retract the handle to lock the table bases. Repeat on the opposite side of the table.



TABLE MODEL

10. After confirming the two table halves are locked together, retract the supporting legs. To do this, pull on the supporting leg knob and retract the supporting leg until it is in the undercarriage. Repeat for the opposit side of the table.

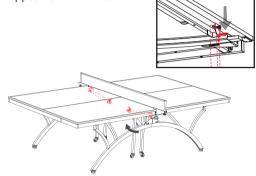

Adjustments

1. To level the table tops, place water leveler on the table top and move leveling wheels (picture #a) accordingly as well as the leg adjustable levelers if needed (picture #b) If there is a gap between table tops, tighten or loosen bolt located behind the leveling wheels at the connecting point of the two table basses (picture #c)



NET SET PART LIST



2 × Posts

1Net



2 x Inner Tubes

2 x Metal Rods

4 x Tube Caps





2 x Metal Bead Chains







2 x Height Adjustment Knob

HOW TO INSTALL

Inner Tub		
	Remove the inner tube from the supporting post. Detach the plastic cap from one end of the inner tube and remove the metal rod.	
Supporting Post Groove Height Adjustment Knob	Thread the metal rod through the sleeve on the end of the net and slide into gap on the inner tub. Replace the plastic cap. Insert the inner tube into the supporting	•
Tightening Scre		
	 Attach metal beads to each side of the net cord and 	

4 Attach metal beads to each side of the net cord and insert beads into groove on post to gain tension on the top edge of the net.

5 If necessary, use the height adjustment knob to raise or lower the net height to the desired level (a net-height gauge is included.)



CONGRATULATIONS!

This completes the assembly of the Killerspin Revolution SVR

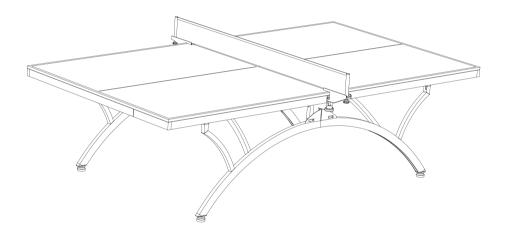


TABLE MODEL

Dimensions

Length:9 ft (274 cm) Width: 5 ft (152.5 cm) Height: 2 ft 6 in (76 cm) Table Top: 0.7" (18 mm)

Package

Box Dimensions: 1650 x 1460 x 240 mm Table Weight: 105 kg Box Weight: 30 kg Total Weight: 135 kg

Include: Table Top x2, Levelers x4, Net Set x1



Designed by Killerspin in Chicago

Killerspin LLC 33 W. Monroe Street Suite 1050 Chicago, IL 60603

killerspin^k concierge: 1-866-577-5291

www.killerspin.com