

JETSON


JetKart[®] 2.0

Hoverboard Attachment

A guide for your ride.

IMPORTANT: READ CAREFULLY AND RETAIN FOR FUTURE REFERENCE.

MODEL: JKAR20-BK

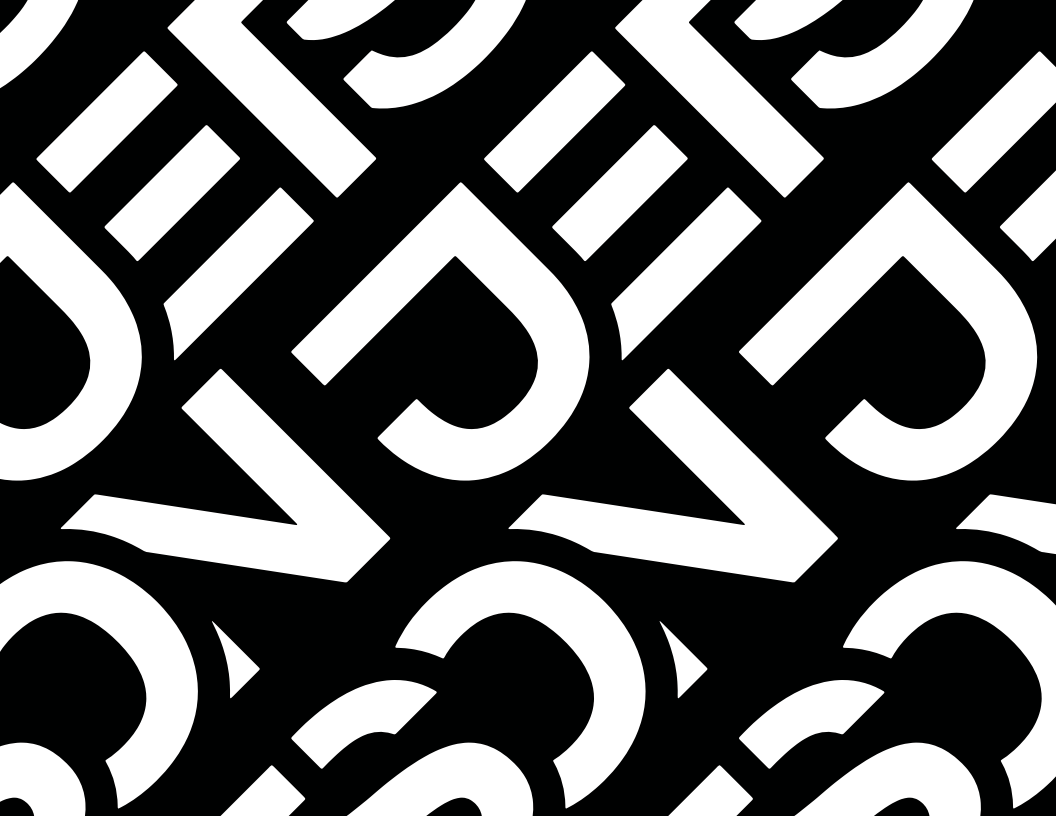

**Jetson's top two riding rules:
Be safe. Have fun!**

Contents

Safety Warnings	4
What's in the Box	6
Product Specs	8
Attaching the Handles	9
Attaching the Seat	11
Assembling the Frame	13
Attaching the Wheel	16
Attaching the JetKart® 2.0 to a Hoverboard	17
Adjusting Length	22
Getting on the JetKart® 2.0	24
Helmet Safety	25
Riding the JetKart® 2.0	26
Care & Maintenance	30
Warranty	30

Safety Warnings

- Before use, please read the user manual and safety warnings carefully, and make sure you understand and accept all the safety instructions. The user will be responsible for any loss or damage caused by improper use.
- Before each cycle of operation, the operator shall perform the preoperation checks specified by the manufacturer: That all guards and pads originally supplied by the manufacturer are in proper place and in serviceable condition; That the braking system is functioning properly; That any and all axle guards, chain guards, or other covers or guards supplied by the manufacturer are in place and in serviceable condition; That tires are in good condition, inflated properly, and have sufficient tread remaining; The area that the product is to be operated should be safe and suitable for safe operation.
- Components shall be maintained and repaired in accordance with the manufacturer's specifications and using only the manufacturer's authorized replacement parts with installation performed by dealers or other skilled persons.
- Warning against recharging non-rechargeable batteries.
- Don't allow hands, feet, hair, body parts, clothing, or similar articles to come in contact with moving parts, wheels, or drive train, while the motor is running.
- This product should not be used by children or persons with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction (IEC 60335-1/A2:2006).
- Unsupervised children should not play with the product (IEC 60335-1/A2:2006).
- Adult supervision is required.
- The rider should not exceed 250 lb.
- Units shall not be operated to perform racing, stunt riding, or other maneuvers, which may cause loss of control, or may cause uncontrolled operator/passenger actions or reactions.
- Never use near motor vehicles.
- Avoid sharp bumps, drainage grates, and sudden surface changes. Scooter may suddenly stop.
- Avoid streets and surfaces with water, sand, gravel, dirt, leaves, and other debris. Wet weather impairs traction, braking, and visibility.
- Avoid riding around flammable gas, steam, liquid, or dust that could cause fire.
- Operators shall adhere to all of the manufacturer's recommendations and instructions, as well as comply with all laws and ordinances: Units without headlights shall be operated only with adequate daylight conditions of visibility, and; Owners shall be encouraged to highlight (for conspicuity) using lighting, reflectors, and for low-riding units, signal flags on flexible poles.
- Persons with the following conditions shall be cautioned not to operate: Those with heart conditions; Pregnant women; Persons with head, back, or neck ailments, or prior surgeries to those areas of the body; and persons with any mental or physical conditions that may make them susceptible to injury or impair their physical dexterity or mental capabilities to recognize, understand, and perform all of the safety instructions and to be able to assume the hazards inherent in unit use.
- Do not ride at night.
- Do not ride after drinking or taking prescription medication.
- Do not carry items when riding.
- Never operate the product barefooted.

- Always wear shoes and keep shoelaces tied.
- Make sure your feet are always placed securely on the deck.
- Operators always shall use appropriate protective clothing, including but not limited to a helmet, with appropriate certification, and any other equipment recommended by the manufacturer: Always wear protective equipment such as helmet, knee pads, and elbow pads.
- Always give way to pedestrians.
- Be alert to things in front and far away from you.
- Do not allow distractions when riding, such as answering the phone or engaging in any other activities.
- The product cannot be ridden by more than one person.
- When you ride the product along with other riders, always keep a safe distance to avoid a collision.
- When turning, be sure to maintain your balance.
- Riding with improperly adjusted brakes is dangerous and can result in serious injury or death.
- The brake may become hot while operating, do not touch the brake with your bare skin.
- Applying brakes too hard or too suddenly can lock up a wheel, which could cause you to lose control and fall. Sudden or excessive application of the brake may result in injury or death.
- If the brake loosens, please adjust with the hexagon wrench, or please contact the Jetson Care Team.
- Replace worn or broken parts immediately.
- Check whether all safety labels are in place and understood before riding.
- The owner shall allow the use and operation of the unit after a demonstration that such operators can understand and operate all components of the unit before use.
- Do not ride without proper training. Do not ride at high speeds, on uneven terrain, or on slopes. Do not perform stunts or turn abruptly.
- Recommended for indoor use.
- Prolonged exposure to UV rays, rain and the elements may damage the enclosure materials, store indoors when not in use.

MODIFICATIONS

Do not attempt to disassemble, modify, repair, or replace the unit or any components of the unit without instruction from the Jetson Care Team. This will void any warranty, and can lead to malfunctions which may cause injury.

ADDITIONAL OPERATION PRECAUTIONS

Do not lift the product off the ground while it is on and the wheels are in motion. This can result in freely spinning wheels, which may cause injury to yourself or others nearby. Do not jump on or off the product, and do not jump while using it. Always keep your feet firmly planted on the foot rest while in operation. Always check the battery charge before using.

California Proposition 65



This product can expose you to chemicals including Cadmium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov.

What's in the Box

1. REAR FRAME (A)
2. FRONT FRAME (B)
3. HANDLE (x2)
4. SEAT
5. FOOT REST
6. WHEEL
7. VELCRO STRAP (x4, INCLUDING 2 SPARE)

HARDWARE AND TOOLS:



FRAME CLAMPS
(x2)



WASHERS
(x4)



SMALL BOLTS,
& NUTS (x4)



LARGE BOLTS
& NUTS (x6)




ALLEN KEYS
(x2, SMALL AND
LARGE)



WRENCH

**** HOVERBOARD NOT INCLUDED**

* ADULTS MUST ASSIST CHILDREN IN THE ASSEMBLY AND INITIAL ADJUSTMENT PROCEDURES OF THE PRODUCT.

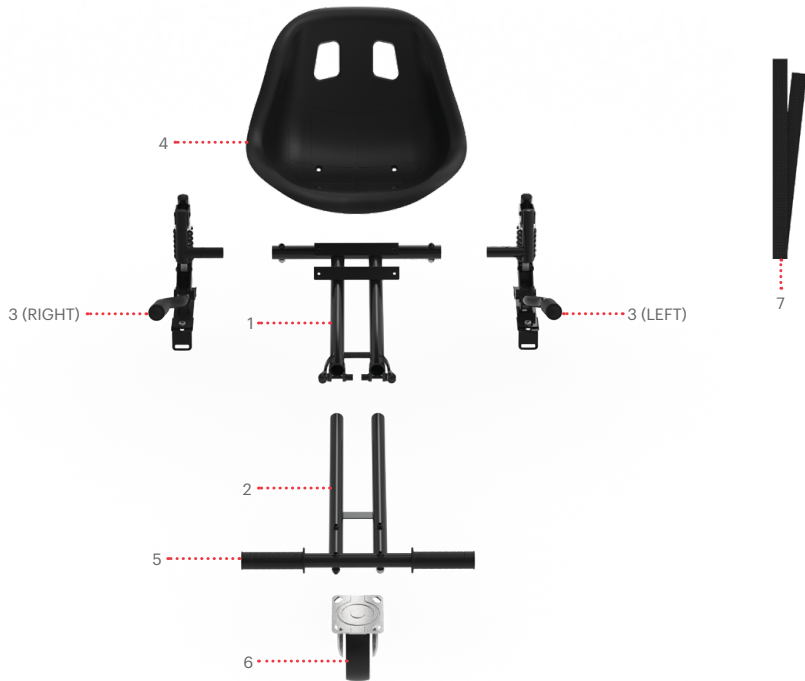

NOTE: IMAGES MAY NOT REFLECT EXACT APPEARANCE OF ACTUAL PRODUCT.


Product Specs

- **WEIGHT LIMIT:** 250 LBS
- **PRODUCT WEIGHT:** 16.3 LBS
- **RECOMMENDED AGE:** 12+
- **WHEEL SIZE:** 6"
- **DIMENSIONS:** 40.7" (L) × 20.5" (W) × 17.2" (H)


1. Getting Started

1.1 Attaching the Handles

1. SLIDE LEFT HANDLE SUPPORT INTO THE LEFT SIDE OF THE REAR FRAME (A) SO THAT THE HOLE IN THE FRAME AND HANDLE SUPPORT ALIGN.
2. REPEAT WITH THE RIGHT HANDLE ON THE RIGHT-HAND SIDE OF THE REAR FRAME.

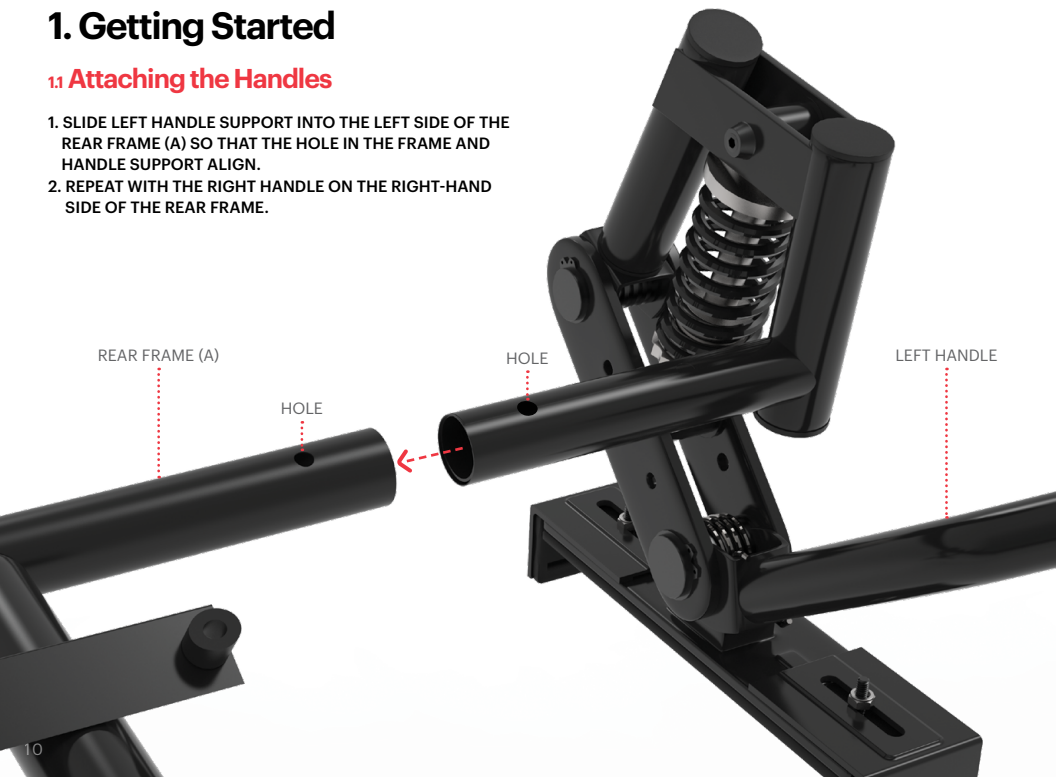


3. INSERT A LARGE BOLT THROUGH THE TOP OF THE ALIGNED HOLES ON ONE SIDE OF THE FRAME.
4. GENTLY TWIST A NUT ONTO THE END OF THE BOLT.
5. STABILIZE THE POSITION OF THE NUT WITH THE WRENCH AND TIGHTEN THE BOLT INTO IT USING THE LARGE ALLEN KEY.
6. REPEAT ON THE OTHER SIDE WITH THE OTHER HANDLE.
7. MAKE SURE THAT BOLTS AND NUTS ARE TIGHT AND THE HANDLE SUPPORTS ON BOTH SIDES ARE SECURED TO THE FRAME.

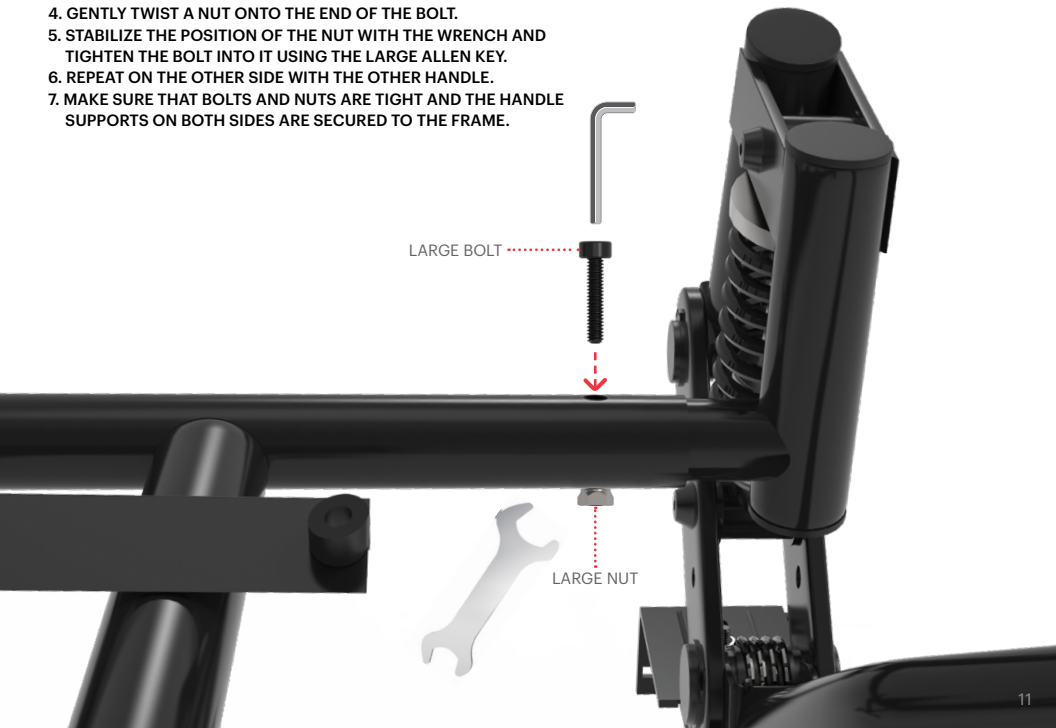

1.2 Attaching the Seat

1. ALIGN HOLES IN SEAT TO THE FOUR MATCHING HOLES ON THE REAR FRAME (A).
2. INSERT A SMALL BOLT THROUGH EACH SET OF ALIGNED HOLES.
3. GENTLY TWIST A SMALL NUT ONTO THE END OF EACH BOLT.
4. STABILIZE THE POSITION OF A NUT WITH THE WRENCH AND TIGHTEN THE BOLT INTO IT USING THE SMALL ALLEN KEY.
5. REPEAT TO TIGHTEN THE OTHER THREE BOLT/NUT COMBOS.

**IMPORTANT: DO NOT OVER-TIGHTEN THE BOLTS.
OVER-TIGHTENING CAN CAUSE THE SEAT TO CRACK.**

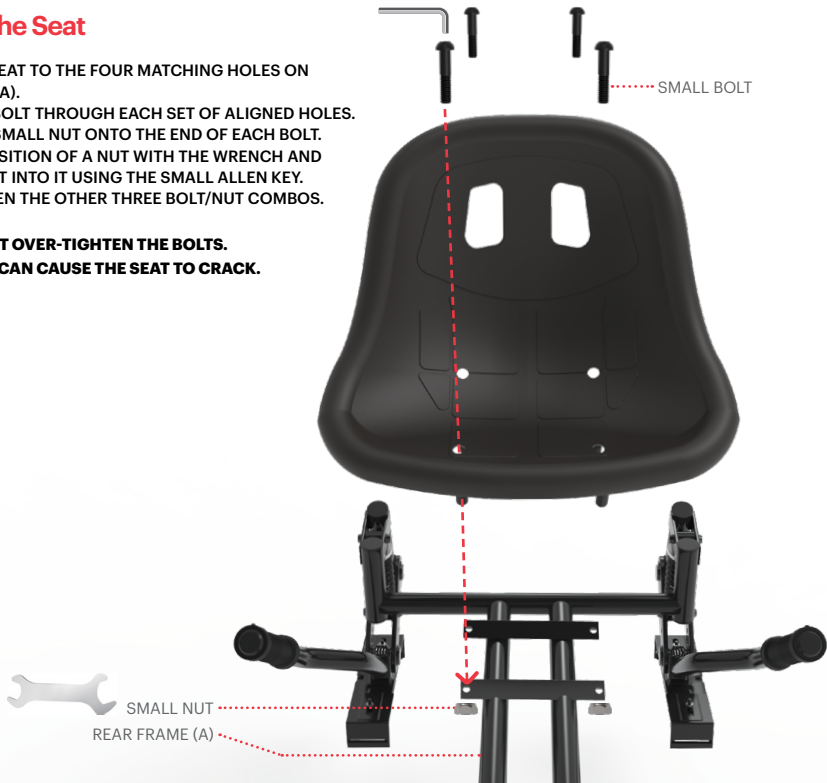


5. MAKE SURE THE BOLTS AND NUTS ARE TIGHT AND THE SEAT IS SECURED TO THE FRAME.




1.3 Assembling the Frame


1. ALIGN THE TUBES ON THE FRONT FRAME (B) WITH THE TUBES ON THE REAR FRAME (A). (BE SURE THAT THE RIGHT SIDE OF THE FRAME IS ON TOP. IN CORRECT POSITION, THE JETSON LOGO WILL BE UPRIGHT.)
2. WHILE PUSHING IN THE PINS ON THE FRONT FRAME, SLIDE THE FRONT FRAME TUBES INTO THE REAR FRAME TUBES.

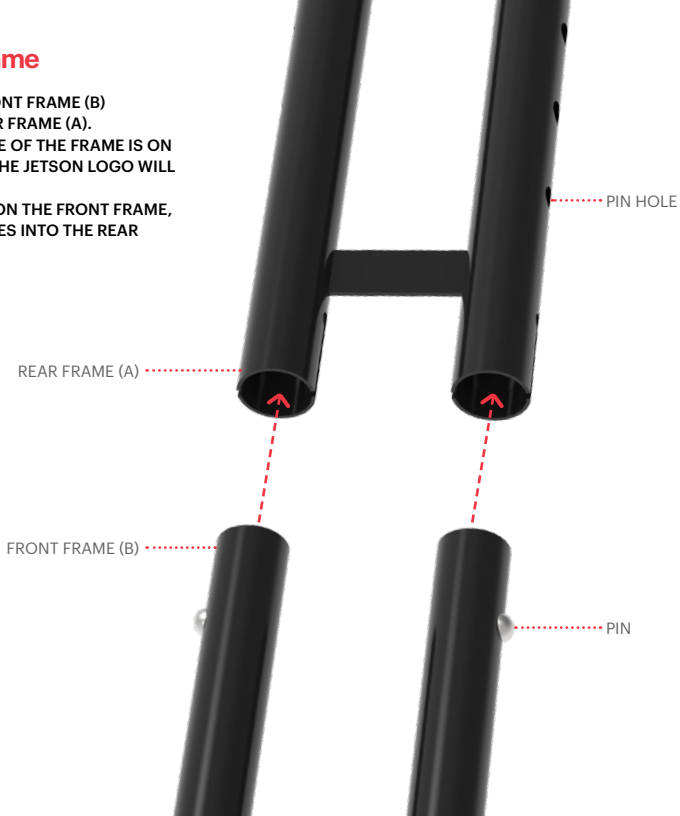

3. CONTINUE PUSHING IN THE FRONT FRAME TUBES UNTIL THE PINS POP INTO PLACE IN THE FIRST PIN HOLES ON THE REAR FRAME TUBES.
4. UNSCREW AND REMOVE THE KNOBS FROM EACH FRAME CLAMP. SET ASIDE.
5. REMOVE ONE WHITE WASHER OFF OF EACH FRAME CLAMP AND SET ASIDE WITH THE KNOBS. LEAVE THE SILVER WASHER AND REMAINING WHITE WASHER ON THE CLAMP STEM.

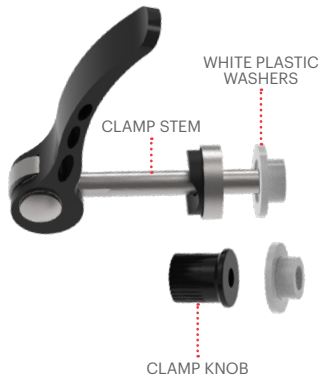

6. WORKING FROM THE OUTSIDE IN TOWARDS THE CENTER, INSERT ONE CLAMP STEM (WITH A SILVER WASHER AND PLASTIC WHITE WASHER STILL ON IT) THROUGH THE TWO HOLES ON THE UNDERSIDE OF ONE OF THE CLAMP BRACKETS.
7. SLIDE A WHITE WASHER ONTO THE END OF THE CLAMP STEM SO THAT THE SMALLER SIDE OF THE WASHER IS FACING IN.
8. HOLD A KNOB IN POSITION AT THE HOLE FACING CLAMP STEM AND TWIST THE LATCH CLOCKWISE INTO THE KNOB.

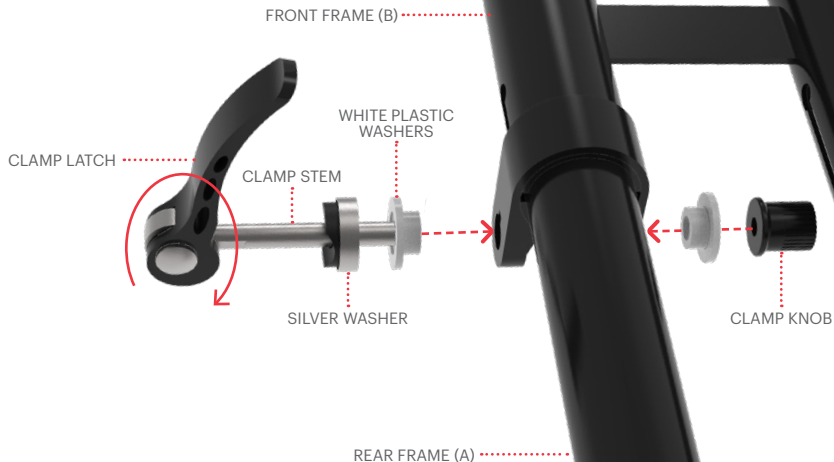

9. TIGHTEN THE KNOB AND CLOSE THE CLAMP LATCH.

*** IMPORTANT: DO NOT OVER-TIGHTEN THE KNOB. OVER-TIGHTENING CAN PREVENT THE LATCH FROM OPENING AND CLOSING EASILY.**


10. REPEAT STEPS 6 – 9 IN THE OTHER BRACKET WITH THE OTHER CLAMP COMPONENTS.


CLAMP LATCH

CLAMP

KNOB

KNOB

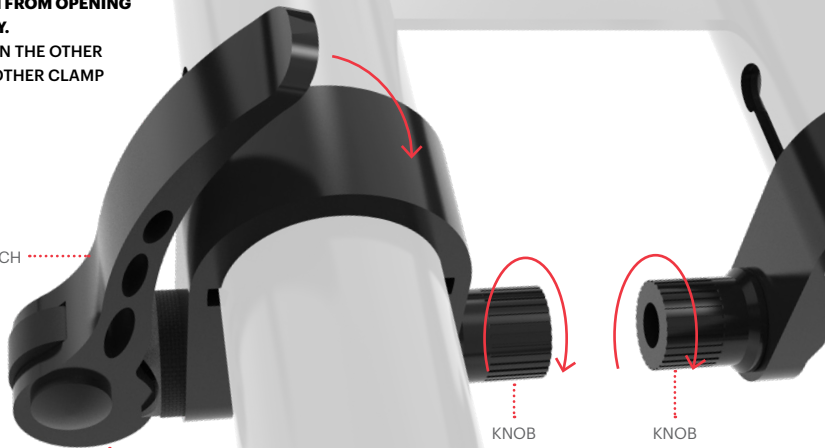

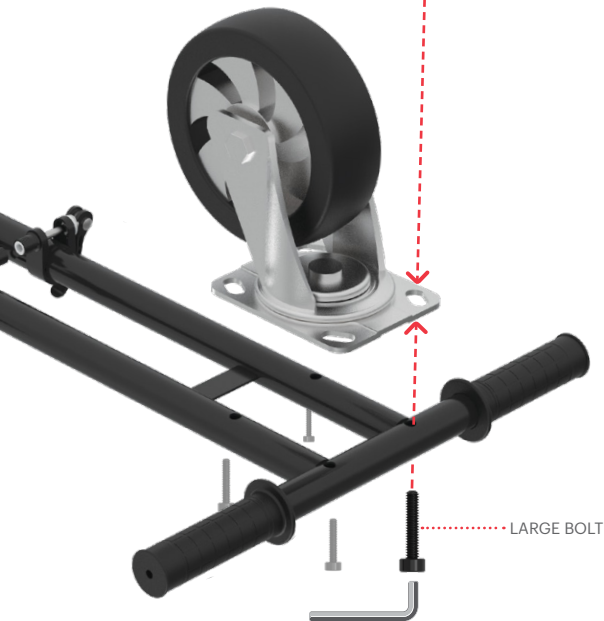


1.4 Attaching the Wheel

1. TURN THE JETKART UPSIDE-DOWN.
2. POSITION THE WHEEL BRACKET ON THE FRONT OF THE FRAME SO THAT THE 4 HOLES IN THE BRACKET ARE ALIGNED WITH THE 4 HOLES IN THE FRAME.
3. FROM THE UNDERSIDE, INSERT A LARGE BOLT THROUGH EACH OF THE HOLES IN THE FRAME AND UP THROUGH THE HOLES IN THE WHEEL BRACKET.
4. SLIDE A WASHER AND THEN TWIST A LARGE NUT CLOCKWISE ONTO THE END OF EACH BOLT.
5. TIGHTEN THE NUT USING THE WRENCH AND LARGE ALLEN KEY.
6. FLIP THE JETKART OVER SO THAT IT IS RESTING ON THE WHEEL AND HANDLE BRACKETS.

1.5 Attaching the JetKart® 2.0 to a Hoverboard

1. USING THE WRENCH, LOOSEN THE NUT ON THE BACK OF EACH BRACKET SUPPORTING THE HANDLES BY TURNING IT COUNTERCLOCKWISE.

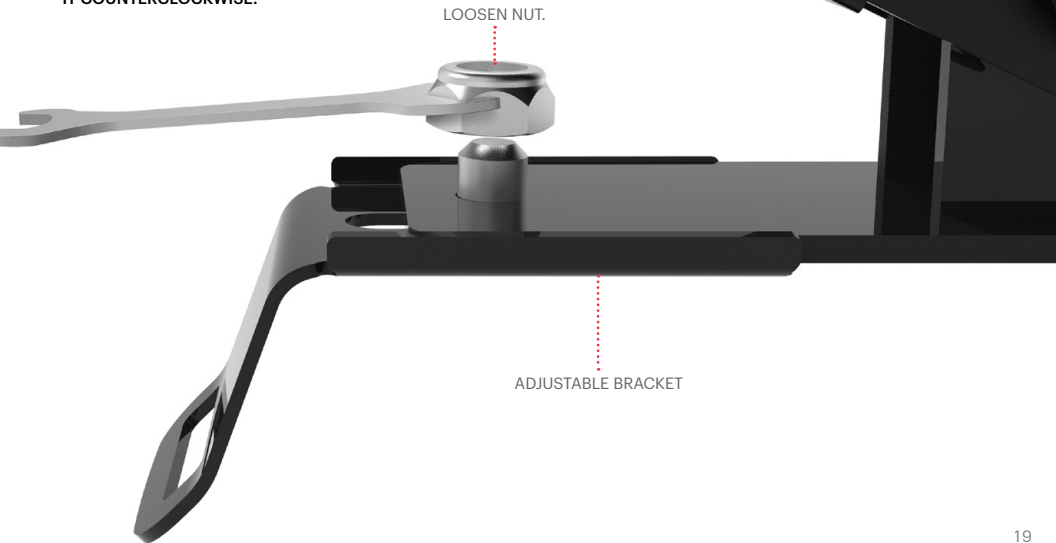

2. PLACE ADJUSTABLE BRACKETS ON TOP OF HOVERBOARD.
3. EXTEND OR CONTRACT ADJUSTABLE BRACKET BY SLIDING IT SO THAT THE WIDTH OF THE BRACKET MATCHES THE WIDTH OF YOUR HOVERBOARD, AND THE BRACKET ARMS HUG THE FRONT AND BACK OF THE HOVERBOARD.

HOVERBOARD


4. USE THE WRENCH TO TIGHTEN THE NUTS ON EACH BRACKET BY TURNING THEM CLOCKWISE AND SECURE THE BRACKET.






VELCRO STRAP

VELCRO

5. SLIDE A VELCRO STRAP THROUGH THE SLOT ON THE FRONT OF EACH BRACKET. WRAP EACH STRAP UNDER THE HOVERBOARD AND UP THROUGH THE SLOTS ON THE REAR OF THE BRACKETS.
6. PULL STRAPS TIGHT AND FOLD THE ENDS OF THE STRAPS OVER. PRESS THE VELCRO ON EACH FOLDED END OF THE STRAP FIRMLY ONTO THE VELCRO ON THE MIDDLE OF THE STRAP.



7. CHECK THAT THE JETKART® 2.0 IS SECURELY ATTACHED TO THE HOVERBOARD.

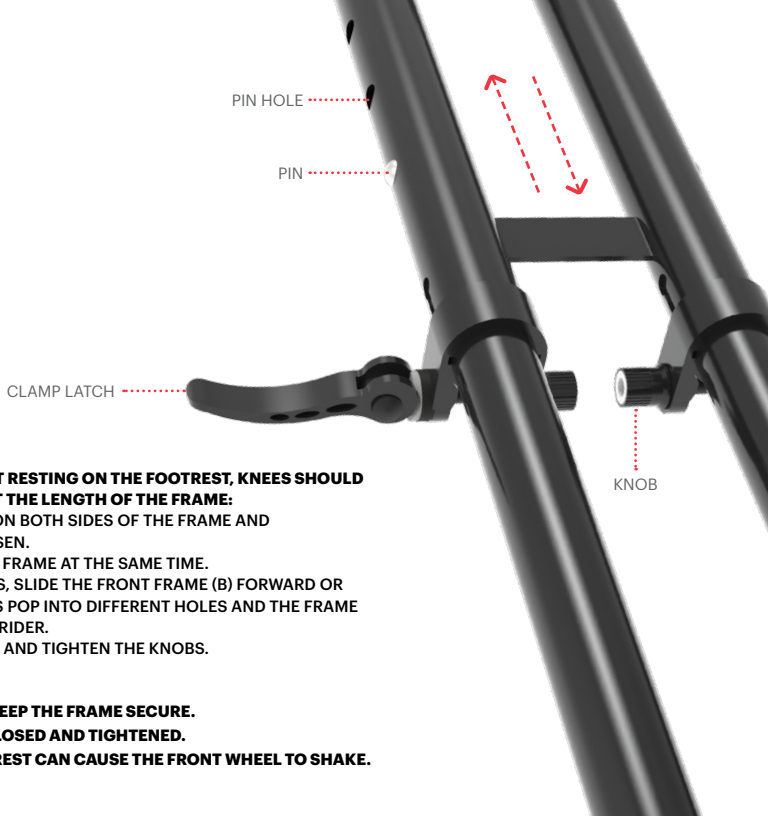

PIN HOLE

PIN

CLAMP LATCH

KNOB

1.6 Adjusting Length

WHEN SEATED AND WITH FEET RESTING ON THE FOOTREST, KNEES SHOULD BE SLIGHTLY BENT. TO ADJUST THE LENGTH OF THE FRAME:

1. OPEN THE CLAMP LATCHES ON BOTH SIDES OF THE FRAME AND TWIST BOTH KNOBS TO LOOSEN.
2. PRESS IN BOTH PINS ON THE FRAME AT THE SAME TIME.
3. WHILE PRESSING IN THE PINS, SLIDE THE FRONT FRAME (B) FORWARD OR BACKWARDS UNTIL THE PINS POP INTO DIFFERENT HOLES AND THE FRAME IS A SUITABLE SIZE FOR THE RIDER.
4. CLOSE THE CLAMP LATCHES AND TIGHTEN THE KNOBS.

IMPORTANT:

- **THE PINS ALONG WILL NOT KEEP THE FRAME SECURE. THE LATCH MUST ALSO BE CLOSED AND TIGHTENED.**
- **OVEREXTENDING THE FOOTREST CAN CAUSE THE FRONT WHEEL TO SHAKE.**



JETSON

2. Making Moves

2.1 Getting on the JetKart® 2.0

- PLACE THE JETKART® 2.0 ON A FLAT SURFACE WITH THE HOVERBOARD TURNED OFF.
- CAREFULLY SIT IN THE JETKART® 2.0 AND THEN PLACE YOUR FEET ON THE FOOTREST.
- MAKE SURE THE HOVERBOARD IS LEVELED, AND, IF NECESSARY, REACH DOWN AND ROTATE THE HOVERBOARD'S FOOTPADS SO THEY ARE EVENLY ALIGNED AND PARALLEL TO THE GROUND.
- TURN ON THE HOVERBOARD.

IMPORTANT:

- **DO NOT TURN ON THE HOVERBOARD BEFORE YOU SIT DOWN. IF THE HOVERBOARD IS POWERED ON BUT NOT LEVELED WHEN YOU TURN IT ON, THE HOVERBOARD WILL PROPEL THE JETKART FORWARD OR BACKWARD IMMEDIATELY.**

2.2 Helmet Safety



**PROPER POSITIONING:
THE FOREHEAD IS COVERED
BY THE HELMET.**



**IMPROPER POSITIONING:
THE FOREHEAD IS EXPOSED.
A FALL COULD RESULT IN SERIOUS INJURY.**

* WEAR A HELMET, APPROPRIATE CLOTHING, SHOES, AND SAFETY GEAR. AVOID CLOTHING THAT CAN GET CAUGHT INTO OR UNDER THE WHEELS. CLOSED-TOE, FLAT SHOES ARE RECOMMENDED. WEAR AN ASTM F1492 APPROVED HELMET AND PROTECTIVE GEAR TO PREVENT INJURY IN THE EVENT OF AN ACCIDENT.

2.3 Riding the JetKart® 2.0

IMPORTANT: TIGHTEN ALL BOLTS AND NUTS BEFORE EACH RIDE.



TO GO FORWARD - PUSH DOWN BOTH HANDLES



TO BRAKE/REVERSE - PULL UP BOTH HANDLES



TO TURN RIGHT - PUSH DOWN LEFT HANDLE,
PULL UP RIGHT HANDLE



TO TURN LEFT - PULL UP LEFT HANDLE,
PUSH DOWN RIGHT HANDLE

Care & Maintenance

CLEANING THE JETKART® 2.0

- TO CLEAN THE JETKART® 2.0, CAREFULLY WIPE WITH A DAMP CLOTH AND THEN DRY WITH A DRY CLOTH.
- DO NOT USE WATER TO CLEAN THE JETKART® 2.0. WATER CAN CAUSE DAMAGE TO THE FRAME, SEAT, OR WHEEL, WHICH CAN CAUSE A MALFUNCTION THAT PUTS RIDER SAFETY AT RISK.

STORING THE JETKART® 2.0

- STORE THE JETKART® 2.0 INDOORS AND IN A DRY PLACE.
- COVER THE JETKART® 2.0 TO PROTECT IT AGAINST DUST.

PRECAUTIONS

- KEEP AWAY FROM FIRE AND EXCESSIVE HEAT.
- AVOID INTENSE PHYSICAL SHOCK, SEVERE VIBRATION, OR IMPACT.
- RIDE THE JETKART® 2.0 ON A SMOOTH, FLAT SURFACE.
- PROTECT FROM WATER OR MOISTURE.
- CONTACT THE JETSON CARE TEAM IF THERE ARE ANY ISSUES WITH THE JETKART® 2.0.

Warranty Coverage

ONE-YEAR GENERAL LIMITED WARRANTY

All new Jetson products are warranted against defects in materials and workmanship for a period of one year from the date of original retail purchase when used in accordance with Jetson's user manuals (refer to ridejetson.com/support).

Under this warranty, you will be able to direct your claims to Jetson even in situations where you purchased the Jetson Product from one of our authorized retailers.

To read the full terms of our warranty, visit ridejetson.com/warranty.

Stay connected.

Be sure to follow **@ridejetson** on social media to learn about fantastic offers, giveaways, and all the latest Jetson news.



Loving your ride?

Then be sure to leave a review at ridejetson.com/reviews.
We can't wait to hear from you!

JETSON

#MakeMoves

Questions? Let us help.

ridejetson.com/support
ridejetson.com/chat

To exercise your product's
1-year limited warranty
or inquire about warranty
coverage, contact us directly.

US/CANADA: 1-888-976-9904
UK: +44 1355 241222

Manufactured in Shenzhen, China
Imported by Jetson Electric Bikes LLC.
P.O. Box 320149, 775 4th Ave #2,
Brooklyn, NY 11232

www.ridejetson.com



Made in China
Date Code: 07/2023
Document Edition: v2.1

© 2022, JETSON. ALL RIGHTS RESERVED. Manufactured by JETSON ELECTRIC BIKES LLC.
No portion of this document, including shape, copy, graphics, and design,
may be reproduced or transmitted in any form or by any means.