


NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

DUCATI SUPERSPORT 939

FENDER ELIMINATOR

- 1 Remove the stock fender with a 4mm allen key or socket (picture 1)
- 2 Cut the zip ties and unplug turn signal and plate light connectors
- 3 Remove (4) bolts under tail with 6mm allen key or socket (picture 2)
- 4 Slide fender off the bike
- 5 Remove (2) stock M5 bolts under tail (picture 3)
- 6 Mount NRC license plate bracket with M5x25 bolts and small black spacers (picture 4/5)
- 7 Plug in white connector (plate light)
- 8 Begin assembling fender eliminator:
 - Slide M8x40 bolts through black spacer and turn signal bracket (picture 6)
 - Mount M8x30 bolts, white spacers, push nuts (picture 7)
 - Longer white spacers in back, shorter white spacers up front. Push nuts over top of spacers to secure and help mount onto bike
- 9 Take kit and plug in black connectors (turn signals). Check to make sure they are plugged into the right connectors before finishing mounting the kit.

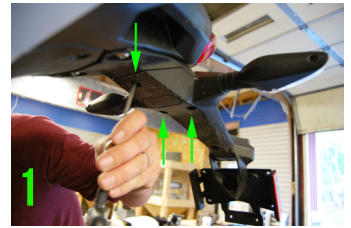

NEW RAGE CYCLES

INSTALLATION INSTRUCTIONS

FENDER ELIMINATOR

- 10 Mount assembled turn signal bracket and mount onto bike (picture 8)
- 11 Mount your license plate
- 12 Put seat back on

If installing with full Akra exhaust system, mount exhaust bracket below turn signal bracket sandwiching our kit between the Akra bracket and the bike (picture 9)

