

Bowers XT-Series Holemikes

FREE Bowers Hat with Purchase! While Supplies Last!

The Fowler/Bowers range of mechanical two and three point bore micrometers are now available as XT extended travel holemikes, allowing a wide measurement range without the need to interchange anvils.



Special Features:

- Graduations 0.00025"
- 3-pt contact with tungsten carbide measuring anvils above .5"
- Blind bore measuring above .5"
- · Ratchet stop for consistent measuring
- Non-removable anvils
- · Extensions available for deep measuring
- · Setting rings included in all sets
- · Includes UKAS certificates for all Holemikes and setting rings
- Every gage is individually serialized
- · Special anvils available, contact the Fowler Technical Department

Order				Meas.	Ring	List	Sale
Number	Range	Grads.	Accuracy	Depth	Included	Price	Price
F52-255-310	.250"312"	.00025"	.00015"	2.28"	.312"	\$675.00	\$549.95
F52-255-311	.312"375"	.00025"	.00015"	2.28"	.312"	625.00	499.50
F52-255-312	.375"500"	.00025"	.00015"	2.28"	.5"	625.00	499.50
F52-255-313	.500"625"	.00025"	.00015"	2.44"	.5"	625.00	499.50
F52-255-314	.625"750"	.00025"	.00015"	2.44"	.75"	641.00	549.00
F52-255-315	.750"-1"	.00025"	.00015"	2.60"	.75"	704.00	598.80
F52-255-316	1"-1.375"	.00025"	.00015"	2.60"	1.375"	1003.00	859.70
F52-255-317	1.375"-2"	.00025"	.00015"	3.15"	1.375"	1027.00	869.50
F52-255-318	2"-2.625"	.00025"	.0002"	3.15"	2.625"	1225.00	989.80
F52-255-319	2.625"-3.250"	.00025"	.0002"	3.15"	2.625"	1236.00	998.70
F52-255-320	3.250"-4"	.00025"	.0002"	3.94"	3.25"	1542.00	1319.60

Bowers XT-Series Holemike Sets

Order Number	Range	Includes	List Price	Sale Price
F52-255-565	.250"—.375"	2 heads, 2 handles, 1 ring	\$1499.00	\$1299.50
F52-255-665	.375"750"	3 heads, 3 handles, 2 rings	1707.00	1475.20
F52-255-775	.750"-2"	3 heads, 3 handles, 2 rings	2682.00	2257.60
F52-255-885	2"—4"	3 heads, 3 handles, 2 rings	3636.00	3150.60

2

TOOL-A-THON



Order Number	Description	Range	List Price	Sale Price
F54-870-001	Xtra-Value II Electronic Micrometer	0-1"/0-25mm	\$84.00	\$59.50
F54-870-002	Xtra-Value II Electronic Micrometer	1-2"/25-50mm	85.00	75.40
F54-870-003	Xtra-Value II Electronic Micrometer	2-3"/50-75mm	99.95	89.80
F54-870-103	Xtra-Value II Electronic Micrometer Set	0-3"/0-75mm	300.00	183.96
F54-100-350	CR2032 Battery		5.50	

Electronic Coolant Resistant Micrometers



Order Number	Description	Range	List Price	Sale Price
F54-860-001	IP54 Electronic Micrometer	0—1"/0 <mark>—25mm</mark>	\$106.40	\$79.20
F54-860-002	IP54 Electronic Micrometer	1—2"/2 <mark>5mm—50mm</mark>	123.20	89.20
F54-860-003	IP54 Electronic Micrometer	2—3"/5 <mark>0mm—75mm</mark>	134.40	99.80
F54-860-103	IP54 Electronic Micrometer Set	0—3"/0 <mark>—75mm</mark>	370.65	259.70
F54-902-110	LR44 Battery		6.60	

Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

3

Winter 2014

TOOL-A-THON



Micrometer Calibration Sets are available on page 5!

4

-00L-A-THON



Caliper, Micrometer & Snap Gage Checking Set

Fowler's setting master is quick, easy and extremely accurate. It comes with a certificate of calibration and a fitted aluminum case. Save time and money by calibrating your own measuring tools quickly and easily.

Set Includes: · Calibration certification traceable to N.I.S.T. standards Stand height: 12.5" 9 pc. Grade AS-0 gage block set (sizes: .625", .100", .125", .200", 250", .300", .500", 1.000" & 2.000" · Certificate of calibration is traceable to N.I.S.T. standards & provides the individual deviation of each block Optical flat (flatness: .000004"; Parallelism: .00002") · 4.0mm ball end T-handle hex wrench Worn blocks can be easily replaced! Order Number Description List Price Sale Price F53-813-001-1 Complete Caliper, Micrometer and Snap Gage Checking Set \$303.21 \$272.37

TOOL-A-THON

Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

Micrometer Set and Caliper Combo



0-4" Micrometer Set Features: .0001" reading

- Carbide measuring faces
- Ratchet thimble and locking nut
- Microfine graduations
- · Sizes over 1" include standard.
- Meets or exceeds Federal specifications.

6" and 12" Dial Caliper Features:

- 4-way measuring
- Solid stainless steel construction
- · Silky smooth movement throughout
- .100" range per revolution
- .001" reading dial face
- Tough shockproof design
- · Supplied in shop-hardened case

Order Number
F52-229-007
F52-229-012

Description	List Price	Sale Price
NEW 0-4" Micrometer Set and 6" Caliper	\$271.65	\$220.00
NEW 0-4" Micrometer Set and 12" Caliper	379.00	299.00

Economy Micrometer Sets

- · .0001" reading (.01mm on metric set)
- · Carbide measuring faces
- · Ratchet thimble and locking nut
- Microfine graduations
- Sizes over 1" include standard.
- Meets or exceeds Federal specifications.

Complete in a "Shop Hardened" molded case!

Order Number	Range	List Price	Sale Price
F52-229-213	0-3" set	\$141.10	\$99.50
F52-229-214	0-4" set	217.30	121.50
F52-229-220	0-100mm set	217.30	121.50

Digit Counter Micrometer Sets

- · Digital counter reads to .001".
- · Resolution: .0001" (.01mm on metric set)
- · Microfine graduations on satin chrome.
- · Carbide tipped measuring faces
- Ratchet thimble
- · Positive locking nut on spindle.
- · Sizes over 1" supplied with standards.

Complete in a "Shop Hardened" molded case!

Order Number	Range	List Price	Sale Price
F52-224-103	0-3" set	\$294.00	\$182.00
F52-224-104	0-4" set	399.85	201.80
F52-224-220	0-75mm set	294.00	201.80





Poly-Cal[®] Electronic Caliper Inch/Metric/Fraction INCH • METRIC • FRACTION Fowler Polycarbonate Caliper Includes Fractional Measurement Easy-To-Read Display Lightweight Absolute/Incremental Measurement Range 6"/150mm Direct inch/metric/fraction conversion Polycarbonate frame 4-way measuring · Large easy-to-read display Accuracy +/-.008" Resolution .0005"/.01mm (Fractions by 1/64" increments) Supplied with clip-on vinyl pouch Order Number Description List Price Sale Price F54-101-175 Poly-Cal Electronic Caliper \$24.60 \$19.50 F54-100-350 CR2032 Battery 5.50 **RA-VALUE CAL** Electronic Calipers Fowler mm Accuracy: .001"/.02mm (6" models) Stainless steel frame · Large easy-to-read display · Resolution: .0005"/.01mm Direct inch/metric conversion Absolute/Incremental Measurement ZERO DN 4-way measuring · Includes molded case Also available with a Super Large Display with Hold Feature! OWLER HIGH PR

Order Number	Range	Display Type	List Driss	Sale Price
F54-101-150-2	6"/150mm	Regular Display	\$45.00	\$31.80
F54-101-600-1	6"/150mm	Super Large Display with hold featur	e 56.00	37.50
F54-101-200-1	8"/200mm	Regular Display	67.20	56.50
F54-101-800-1	8"/200mm	Super Large Display with hold featur	e 84.00	63.50
F54-101-300-1	12"/300mm	Regular Display	90.00	88.60
F54-101-900-1	12"/300mm	Super Large Display with hold featur	e 110.00	83.40
F54-100-350	CR2032 Battery		5.50	

Winter 2014

TOOL-A-THON

Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

7

12" Economy Digital Calipers

Winter 2014	4" thru
	Order Number F54-100-004-2
	F54-100-000-2 F54-100-008-2
	F54-100-008-2 F54-100-112-2 F54-100-350
	Water I

14			proved L	lesign!	
	19360	Pat • Pat • Sta	ented ceramic capa inless steel frame	wier acitive sensor	-
	N	• Dire • Acc	ect Inch/Metric conv curacy: .001"/.02mi .0015"/.04n solution: .0005"/.01	m (4" & 6" mode nm (8" & 12" mo	ils) dels)
	21	· Lar	ge easy-to-read LC solute referencing udes molded case	D display	
Order Number		Range		List Price	Sale Price
F54-100-004-2		NEW 0-4"/100mm Cal		\$94.10	\$75.60
F54-100-000-2 F54-100-008-2		NEW 0—6"/150mm Cal NEW 0—8"/200mm Cal		109.75 128.80	80.40 101.20
F54-100-112-2		NEW 0-12"/300mm Ca		168.00	137.80
F54-100-350		CR2032 Battery		5.50	
Water R	esista 🖷	nt IP54 Elec	tronic Ca proved		
ikin	3355			owler	-
	om 0 18	• Wate	er resistant to IP54 nted ceramic capac		Protected to: IP54 CORLINE A FLIGO
• •	N	EVVI - Accu - Resc - Abso - Larg - 4-wa	hless steel frame t Inch/Metric conve iracy: .001"/.02mm olution: .0005"/.01m olute referencing e easy-to-read LCE ty measurement dea melded eace	<i>(6" models)</i> Im	RESISTANT
•	N	EVVI - Accu - Resc - Abso - Larg - 4-wa	ct Inch/Metric conve aracy: .001"/.02mm olution: .0005"/.01m olute referencing e easy-to-read LCE	<i>(6" models)</i> Im	RESISTANT
	Ra	• Direc • Accu • Resc • Absc • Larg • 4-wa • Inclu	ct Inch/Metric conver rracy: .001"/.02mm olution: .0005"/.011 olute referencing e easy-to-read LCE ty measurement des molded case	<i>(6" models)</i> Im) display List Price	RESISTANT
F54-100-777-2	Ra	• Direc • Accu • Accu • Absc • Larg • 4-wa • Inclu • Inclu • Besc • Comparison • Comparison • Comparison • Comparison • Accu • Accu • Accu • Accu • Acsc • A	ct Inch/Metric conve rracy: .001"/.02mm olution: .0005"/.01m olute referencing e easy-to-read LCE ty measurement des molded case P54 Caliper	<i>(6" models)</i> Im) display <u>List Price</u> \$123.20	\$95.20
Order Number F54-100-777-2 F54-100-712-2 F54-100-350	Rai NE CR	• Direc • Accu • Resc • Absc • Larg • 4-wa • Inclu • Inclu • Inclu • My 0-6"/150mm Electronic I • W 0-6"/150mm Electronic I • W 0-12"/300mm Electronic I • W 0-12"/300mm Electronic I	ct Inch/Metric conver tracy: .001"/.02mm olution: .0005"/.01m olute referencing e easy-to-read LCE ty measurement des molded case P54 Caliper IP54 Caliper	(6" models) im) display <u>List Price</u> \$123.20 179.20 5.50	
F54-100-777-2 F54-100-712-2 F54-100-350	Ra	• Direc • Accu • Resc • Absc • Larg • 4-wa • Inclu • Inclu • Inclu • My 0-6"/150mm Electronic I • W 0-6"/150mm Electronic I • W 0-12"/300mm Electronic I • W 0-12"/300mm Electronic I	ct Inch/Metric conver rracy: .001"/.02mm oblution: .0005"/.01m Julte referencing e easy-to-read LCE by measurement des molded case P54 Caliper IP54 Caliper IP54 Caliper	(6" models) im) display <u>List Price</u> \$123.20 179.20 5.50 EFS	\$95.20
F54-100-777-2 F54-100-712-2 F54-100-350	Rai NE CR	• Direc • Accu • Resc • Absc • Larg • 4-wa • Inclu • Inclu • Mo – 6"/150mm Electronic I • W 0 – 12"/300mm Electronic I • W 0 – 12"/300mm Electronic I • Constant •	ct Inch/Metric conver rracy: .001"/.02mm oblution: .0005"/.01m Julte referencing e easy-to-read LCE by measurement des molded case P54 Caliper IP54 Caliper IP54 Caliper	(6" models) im 0 display 2 display 2 display 2 123.20 179.20 5.50 2 FS	\$95.20 141.30
F54-100-777-2 F54-100-712-2 F54-100-350	Rai NE CR	• Direc • Accu • Resc • Absc • Larg • 4-wa • Inclu • Mo – 6"/150mm Electronic I W 0 – 12"/300mm Electronic I 2032 Battery • Electron F54-100-330-1	et Inch/Metric conver rracy: .001"/.02mm Jolution: .0005"/.01m polution could construction the server of the server provided case P54 Caliper IP54 Ca	(6" models) im 0 display 2 display 123.20 179.20 5.50 EFS METRIC • F	\$95.20 141.30 FRACTION F54-100-332 EURO CAL IT FORECLEG DE UNITED DE
EURO EURO Save over 359	Ra NE CR -CAI	Object O	t Inch/Metric conver rracy: .001"/.02mm plution: .0005"/.01m plutor course e easy-to-read LCC ty measurement des molded case P54 Caliper IP54 Caliper IP54 Caliper IP54 Caliper IP54 Caliper INCH • I & fractions tion conversion Measurement 4 standards mm (Fractions in 1 ic case <u>Accuracy</u>	(6" models) im 0 display 123.20 179.20 5.50 PTS METRIC • F /64" increments	\$95.20 141.30 PRACTION F54-100-332 COND-CAL ** PRINCIPAL PRIN
54-100-777-2 54-100-712-2 54-100-350 FURC COURC Save over 35 9 Order Number F54-100-330-1		Object Provide State of the second state	t Inch/Metric conver tracy: .001"/.02mm Jolution: .0005"/.01m Joluto referencing e easy-to-read LCE y measurement des molded case P54 Caliper IP54 C	(6" models) im 0 display 123.20 179.20 5.50 PTS METRIC • F /64" increments	\$95.20 141.30 FRACTION F54-100-332 ENDECAL FORECEDED TO FORECEDED TO ESISTANT Sale Price \$76.30
54-100-777-2 54-100-712-2 54-100-350 EURO Save over 359	Ra NE CR O-CA O-CA O-CA O-CA O-CA O-CA O-CA O-CA	Object O	t Inch/Metric conver tracy: .001"/.02mm plution: .0005"/.01m plute referencing e easy-to-read LCC ty measurement des molded case P54 Caliper IP54 Ca	(6" models) im 0 display 123.20 179.20 5.50 PTS METRIC • F /64" increments	\$95.20 141.30 PRACTION F54-100-332 COND-CAL ** PRESENTATION RESISTANT RESISTANT Sale Price

Wer TOOL-A-THON

Pro-Max	Electronic	Caliper		SM	
M	2			Save \$38.0	0
	DS89s	1.41.57	· · · · · · · · · · · · · · · · · · ·	SYLVAC SYSTEM	
	Maximum Error: .001 4-way measurement, depth and step Resolution: .0005"/.0 Repeatability: .0005", Range: 6"/150mm	inside, outside, 1mm 0.01mm	Temperature range 60C° in storage Hardened stainle RS-232 output Features Absolut Hold function	ss steel constru e/Relative Mea	uction
Order Number	Direct inch/metric cor Range	• •	Includes molded	List Price	Sale Price
F54-200-777-1 F54-100-350	0-6"/150mm Pro-Ma CR2032 Battery	ax Electronic Caliper		\$157.00 5.50	\$119.00
	Hold feature Preset mode now i All sizes feature fin Resolution: .0005"/ Inch/metric convers Includes wooden c .500" internal meas	e adjustment scre .01mm sion ase		BEST SEL	DA LER!
Order Number F54-100-312	Range 0-12"/300mm Caliper	Jaw Depth 3.5"	Accuracy .002"/.04mm	List Price \$193.75	Sale Price \$159.50
F54-100-024-1 F54-100-042-1 F54-100-350	0-24"/600mm Caliper 0-40"/1000mm Caliper CR2032 Battery	4" 4.9"	.003"/08mm .004"/10mm	282.25 1170.35 5.50	239.40 649.00
Heavy D	outy Dial Cal	Graduations: .0 Large .100" one Depth rod 4-way measure Cross-jaws for	e-rev dial		-
		Includes wood			
Order Number F52-025-108 F52-025-112	Range 8" Caliper 12" Caliper	Jaw Le 2.5 2.87	"	List Price \$128.25 186.50	Sale Price \$89.60 129.50

9

Winter 2014

TOOL-A-THON

Winter 2014

TOOL-A-THON

0-6" Dial Calipers



· Supplied in shop-hardened case

	Dial Face	List	Sale
Order Number	Color	Price	Price
F52-008-007	White	\$84.55	\$33.50
F52-008-005	Black	84.55	33.50

Machinist Grade Dial Calipers



		Dial Face	List	Sale
Order Number	Range	Color	Price	Price
F52-008-704	0-4"	White	\$51.50	\$41.20
F52-008-714	0—4"	Black	51.50	41.20
F52-008-706	0—6"	White	70.50	54.20
F52-008-707	0—6"	Black	70.50	54.20
F52-008-709	0-150mm (Metric Model)	Yellow	70.50	54.20
F52-008-708	0—8"	White	88.40	66.20
F52-008-712	0-12"	White	117.05	89.60

Inch/Metric Reading Dial Caliper

With a dual reading face showing inch readings in black and metric readings in red, Fowler's Inch/Metric reading dial caliper is like having two dial calipers in one.



Features:

- · Dial face reads in both inch (black) and metric (red)
- Raised sliding surface prevents wear and defacement of graduations

TOOL-A-THON

- Hardened stainless steel throughout
- · Inside, outside, step and depth measurement
- Covered, stainless steel rack
- Includes case.

Order Number	Range	Graduation	List Price	Sale Price
F52-030-006	NEW 6"/150mm	.001"/.02mm	\$87.35	\$65.50
F52-030-008	NEW 8"/200mm	.001"/.02mm	110.90	83.25
F52-030-012	NEW 12"/300mm	.001"/.02mm	148.95	112.00

Extended Range Dial Caliper

	 Graduations: .001" Stainless steel construction Satin chrome finish Depth rod .500" internal measuring nibs Includes fitted case 	BEST SELLER!
--	---	--------------

Order Number	Range	Depth of Jaws	List Price	Sale Price
F52-008-018	18" Caliper	3.125"	\$232.90	\$178.20
F52-008-024	24" Caliper	3.375"	282.25	221.20

Master Vernier Caliper

Machine engraved from master Slide type fine adjust thumbwheel Nib design measures both inside & outside dimensions Satin chrome finish for glare free reading Graduation: .001"/.02mm	T	1
 Slide type fine adjust thumbwheel Nib design measures both inside & outside dimensions Satin chrome finish for glare free reading 		
 Slide type fine adjust thumbwheel Nib design measures both inside & outside dimensions Satin chrome finish for glare free reading 		
 Slide type fine adjust thumbwheel Nib design measures both inside & outside dimensions Satin chrome finish for glare free reading 		Machine engraved from master
Satin chrome finish for glare free reading		
		Nib design measures both inside & outside dimensions
Graduation: .001"/.02mm		Satin chrome finish for glare free reading
		Graduation: .001"/.02mm
Includes fitted case	Tr	Includes fitted case

Order Number	Range	List Price	Sale Price
F52-085-012	12"/300mm Caliper	\$164.65	\$106.20
F52-085-024	24"/600mm Caliper	352.80	211.30
F52-085-040	40"/1000mm Caliper	817.55	525.60
F52-085-060	60"/1500mm Caliper	2,293.20	1,042.30

Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

11

Vinter 2014

TOOL-A-THON

Shockproof Dial Caliper & Depth Attachment Combo with Wooden Case



Available with White or Black Face.



Easy depth measurement!

Shockproof Dial Caliper:

- Tough shockproof design
- 4-way measuring
- Solid stainless steel construction
- Silky-smooth movement throughout.
- .100" range per revolution
- .001" reading dial face

Depth Attachment:

- Attaches guickly
- · Positive locking screw
- · Precision-ground contact surface.

Packed in a custom-fit wooden case.

Order Number	Description	List Price	Sale Price
F52-008-700	Combo with 6" Whiteface Shockproof Dial Caliper	\$103.95	\$70.95
F52-008-710	Combo with 6" Blackface Shockproof Dial Caliper	103.95	70.95
F52-100-002	Wooden case only	16.80	13.00

Electronic Caliper & Depth Attachment Combo





Easy depth measurement!

Xtra-Value Caliper:

- Accuracy: .001"/.02mm
- · Range: 6"/150mm
- Large easy-to-read display
- Resolution: .0005"/.01mm
- Direct inch/metric conversion
- Absolute/Incremental Measurement
- 4-way measuring

Depth Attachment:

- Attaches quickly
- Positive locking screw
- Precision-ground contact surface.

Packed in a custom-fit wooden case.

- way including						
Order Number	Description	List Price	Sale Price			
F54-008-715	Xtra-Value Caliper & Depth Attachment Combo	\$79.75	\$62.25			
F52-100-002	Wooden case only	16.80	13.00			

Prices & Specifications are subject to change without notice.

with Wooden Case





Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

13

Winter 2014



Supplied in shop-hardened case. Description

Order Number F54-004-330

Xtra-Value Depth Gage and Euro-Cal IV Kit

Prices & Specifications are subject to change without notice.

List Price

\$175.95

Sale Price

\$123.00



Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

15

Winter 2014

FOOL-A-THON

X-Test Indicator—TWICE the range of most indicators!



Order Number	Description	Graduations	Dial Diameter	Dial Reading	List Price	Sale Price
F52-562-001	X-Test Indicator	.0005"	1-1/2"	0—15 <mark>—0</mark>	\$117.55	\$109.95
F52-562-002	X-Test Indicator	.0005"	1"	0-15-0	117.55	109.95
F52-562-003	X-Test Indicator	.001"	1"	0-15-0	117.55	109.95
F52-562-007	X-Test Indicator	.01mm	25mm	0-40-0	117.75	109.95
F52-562-008	X-Test Indicator	.01mm	38mm	0—40 <mark>—0</mark>	117.75	109.95

Vertical X-Test Indicator TWICE the range of most indicators!

- Range: .060"
- Dial reading: 0-15-0
- Jeweled movement
- Revolution counter
- · Easy-to-read tilted dial
- Automatic reversal
- 210° Swivel arc
- 5/32" stem
- Tungsten carbide point: .080"

Order Number	Description	Graduations	Dial Diameter	List Price	Sale Price
F52-562-004	Vertical X-Test Indicator	.0005"	1-1/2"	\$128.75	\$109.95
F52-562-005	Vertical X-Test Indicator	.0005"	1"	128.75	109.95
F52-562-006	Vertical X-Test Indicator	.001"	1"	128.75	109.95

X-Test Indicator and Accessory Combo Kit

040 \$ 120

*	JANA
1-1-5	Contact Points .040" & .120" w purchase
-1	K-SERIES

XTEST

Each Combo Kit Includes:

X-Test Dial Test Indicator (see above)

TEST

- Axial support
- Height gage bar with clamp
- Adaptor sleeve: 5/32" to 3/8"
- Contact point case
- Contact point wrench
- Complete in "Shop Hardened" case.

Order Number	Description	Graduations	List Price	Sale Price
F52-562-100	52-562-001 w/accessories	.0005"	\$172.65	\$155.40
F52-562-110	52-562-002 w/accessories	.0005"	172.65	155.40
F52-562-120	52-562-003 w/accessories	.001"	172.65	155.40

TOOL-A-THON

16

Test Indicators

All Fowler Test Indicators include bi-directional constant clockwise rotation, automatic reversal, three dovetail mountings, jeweled movement, two dovetail clamps and a molded case.



Order	Face	Total	Dial		Dial	Point	List	Sale
Number	Color	Range	Reading	Graduation	Diameter	Length	Price	Price
F52-562-774	white	.030"	0-15-0	.001"	1"	1/2"	\$105.30	\$62.80
F52-562-778	black	.030"	0-15-0	.0005"	1"	1/2"	111.95	62.80
F52-562-775	white	.030"	0-15-0	.0005"	1"	1/2"	111.95	62.80
F52-562-776	white	.030"	0-15-0	.0005"	1-1/2"	1/2"	117.05	68.80
F52-562-780	black	.030"	0-15-0	.0005"	1-1/2"	1/2"	117.05	68.80



Order Number	Face Color	Total Range	Dial Reading	Graduation	Dial Diameter	Point Length	List Price	Sale Price
F52-563-770	white	.008"	0-4-0	.0001"	1"	1/2"	\$111.95	\$90.40
F52-563-771	black	.008"	0-4-0	.0001"	1"	1/2"	111.95	90.40
F52-563-777	white	.008"	0-4-0	.0001"	1-1/2"	1/2"	111.95	90.40
F52-563-772	black	.008"	0-4-0	.0001"	1-1/2"	1/2"	115.30	90.40



Ex	tra	Poin	ts
	I	9	

120¹

Order	Face	Total	Dial		Dial	Point	List	Sale
Number	Color	Range	Reading	Graduation	Diameter	Length	Price	Price
F52-562-781	white	.020"	0-10-0	.0005"	1"	1-7/16"	\$115.30	\$87.20
F52-562-782	black	.020"	0-10-0	.0005"	1"	1-7/16"	115.30	87.20
F52-562-783	white	.020"	0-10-0	.0005"	1-1/2"	1-7/16"	115.30	87.20
F52-562-784	black	.020"	0-10-0	.0005"	1-1/2"	1-7/16"	115.30	87.20






Order	Face	Total	Dial	Graduation	Dial	Point	List	Sale
Number	Color	Range	Reading		Diameter	Length	Price	Price
F52-563-677	white	.080"	0-40-0	.01mm	1-1/4"	1/2"	\$64.90	\$51.90
F52-560-060	white/red	.020"/.05mm	0-10-0/025-0	.0005"/.01mm	1-1/2"	1/2"	88.40	66.30

Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

17

Winter 2014

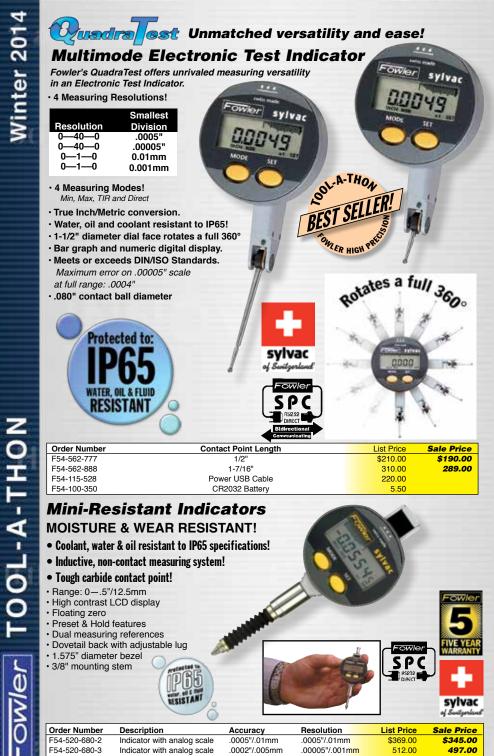



Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

19



For the second s	on even with cable ruction fiting lever included nizable with free soft ructo display		ic Indicat		F54-530-174
Order Number F54-530-124	Range 0500"/12.5mm	Maximum Error .0004"/.01mm	Resolution .0005"/.01mm	List Price \$285.00	Sale Price \$265.00
F54-530-134	0500"/12.5mm	.0002"/.005mm	.00005"/.001mm	365.00	340.00
F54-530-144 F54-530-154	0-1"/25mm 0-1"/25mm	.0004"/.01mm .00024"/.006mm	.0005"/.01mm .00005"/.001mm	310.00 385.00	295.00 360.00
F54-530-164	0-2"/50mm	.0008"/.02mm	.0005"/.01mm	525.00	499.00
F54-530-174	0-2"/50mm	.00032"/.008mm	.00005"/.001mm	610.00	575.00
F54-115-444 F54-115-528	RS Power Data Cab RS Power Data Cab			157.00 220.00	
10" We	kehen T	ansfer Star	ad a	0	
The W is comp	Vorkshop Tra	nsfer Stand d lightweight!			•
Aujusis a Vi					1
• Overall height	12"	1	• Large capacity	positioning ra	Inge
Revolutionary			 Can be locked i 	in any positio	n
 Large range fit 	ne adjustment		 Base 3" wide x 	3.54" long	
		stand is moved and/or			ne adjustment
		with dovetail holders &	 Stainless steel Packed in a hig Weight 4.8 lbs. 	h quality alur	ninum case
Order Number F52-620-717		scription rkshop Transfer Stand	L	ist Price \$108.90	Sale Price \$89.95

Winter 2014

TOOL-A-THON

Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

\$89.95 21

CHROME FLEX MAG SET

With INDEX Dig Electronic Indicator or AGD Black face Indicator

ER HIGH

Included Magnetic Indicator Back for

mounting to most

metal surfaces!

Indi-X Blue Indicator features:

- Direct Inch/Metric Conversion
- 1"/25mm travel
- Auto Off feature
- 2-1/4" dial face
- Lugback and 3/8" stem mountings
- Resolution .0005"/.01mm
- Tolerance indicators
- Absolute/incremental reading
- Floating zero
- Carbide tipped point

Flex Arm Mag Base features:

- · Corrosion resistant chrome plated flex arm
- · 85 lb. pull magnet
- · Holds rigidly in almost any position.
- · V-base for mounting on rounded surfaces.

Magnetic Indicator Back features:

- Use for positioning the indicator on most metal surfaces.
- · Protective coating

All in a shop-hardened case.





AGD Indicator features:

- AGD Group 2
- Dial diameter: 2-1/4"
- Travel: 1"
- · Reading: .001"
- · Continuous reading: .100"
- · Carbide tipped point

See the Indi-X Blue on page 19!

Order Number	Description	List Price	Sale Price
F54-585-100	Chrome Flex Mag and Indi-X Blue Electronic Indicator Set	\$230.95	\$125.60
F52-585-500	Chrome Flex Mag and AGD Black Face Indicator Set	173.25	86.70

Fine Adjust Mag Base Set

With INDEX THE Electronic Indicator or AGD White face Indicator

Indi-X Blue Indicator features:

- Direct Inch/Metric Conversion
- 1"/25mm travel
- · Auto Off feature
- 2-1/4" dial face
- · Lugback and 3/8" stem mountings
- Resolution .0005"/.01mm
- Tolerance indicators
- · Absolute/incremental reading
- Floating zero

TOOL-A-THON

· Carbide tipped point

Magnetic Base features:

- 85 lb. pull
- · Fine adjustment.
- · V-bottom base.

Magnetic Indicator Back features:

Use for positioning the indicator on most metal surfaces.

Protective coating

All in a shop-hardened case.

Included Magnetic Indicator Back for mounting to most metal surfaces!



AGD Indicator features:

- AGD Group 2
- · Dial diameter: 2-1/4"
- Travel: 1"
- · Reading: .001"
- · Continuous reading: .100"
- Carbide tipped point

See the Indi-X Blue on page 19!

Order Number	Description	List Price	Sale Price
F54-585-075	Fine Adjust Mag Base Set with Indi-X Blue Electronic Indicator Set	\$196.35	\$147.26
F52-585-125	Fine Adjust Mag Base with AGD White Face Indicator Set	\$150.15	112.61

Prices & Specifications are subject to change without notice.

K-SERIES

Deluxe Dial Gage Stand

- Measuring Range: 5"/125mm
- · Quick positioning and adjustment
- · Zero settings with knob for fine adjustment
- · Fine adjustment of 5/32"
- · Holds indicators with stems of 3/8" and 8mm
- Diameter of column is 1
- Working surface of 3-1/2" x 3-1/2"
- · Base Height: 1.5"
- · Base Width: 4"
- · Base Length: 6"
- · Overall Height: 8.5"



Indicator shown not included.

Fowler

Order Number	Description	List Pice	Sale Price
F52-580-015	Deluxe Dial Gage Stand	\$286.00	\$126.30
	Ū.		

AGD or INDI-X III Indicator & Stand Combo

Stand features:

- 6" x 6" x 2" granite base
- · Positive lock screw
- · Fine adjustment knob for zero setting
- Column height is 8"
- Microscrew fingertip control
- Flatness = .00005"

Black Face Indicator features:

- · Reading: .001"
- 1" Travel
- AGD Group 2
- · Dial diameter: 2-1/4"
- Continuous reading: 0-100

INDI-X BILLE

Indi-X Blue Electronic Indicator features:

- Direct Inch/Metric Conversion
- 1"/25mm travel
- Lugback and 3/8" stem mountings
 Resolution .0005"/.01mm
- Tolerance indicators
- Absolute/incremental reading
- Floating zero
- · Carbide tipped point

Order Number	Description	List Price	Sale Price
F52-580-109	Black Face Indicator and Stand Combo	\$179.60	\$115.50
F54-580-250	Indi-X Blue Electronic Indicator and Stand Combo	216.65	146.65

Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

Vinter 2014

23



All in a shop-hardened case.

Order Number	Description	List Pice	Sale Price
F52-125-007	NEW X-Proof Depth Gage	\$185.00	\$122.00



JANUARY 2014

24

S LUE! kproof vailable NEI	 Microscrew fir Flatness = .00 X -Proof Indica Travel: 1" Reading: .001 Continuous re Tolerance mai AGD Group 2 Lugback and Robust, shock Rubber bellow O-ring seal or 	s: anite base screw ant knob for zero setting ngertip control b005" ator (F52-520-450): " adding: 0-100 rkers , 2-1/4" dia. carbide point sproof design. vs on stem. a safety cap. ion for bezel and rotating dial.
Order Number F52-580-450	Description NEW X-Proof Gage Stand	List Pice Sale Price \$177.20 \$115.00
X-Proof Wate	 Also mounts test indicator (F52-585-010): Fine adjustment Base dimensions: 2" x 2-11/32" x - Also mounts test indicators with 1/ 8 bl. pull On-Off lever release magnet. V-base for placing on round surfact X-Proof Indicator (F52-520-456 Travel: 1" Reading: .001" Continuous reading: 0-100 Tolerance markers AGD Group 2, 2-1/4" dia. Lugback and carbide point Robust, shockproof design. Abust, shockproof design. O-ring protection for bezel and rotating dial. Sealed back plate. 	1-13/16" 4" post. bes. b): bes. b): bes. bes. b): bes. bes. bes. bes. bes. bes. bes. bes.
Order Number F52-585-155	Description NEW X-Proof Water Resistant Indicator Set	List Pice Sale Price \$77.85 \$55.00

OWIER TOOL-A-THON

SERIES.

Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

25

Winter 2014

0-22" Depth Gage

Twice the range of competitive products!

- 0—1" travel indicator
- .001" Graduations
- Rods connect together for full 22" capacity.
- Satin chrome finish
- Base size: 4"
- Includes 2 extra points for small hole applications; one 0.078" dia. x 1" long and one needle point x 1" long.
- Includes shop-hardened case.



Order Number	Description	List Price	Sale Price
F52-125-006-1	0-22" Depth Gage	\$170.25	\$101.20

X-DEPTH 22 { 0-22" Electronic Depth Gage



Order Number	Description	List Price	Sale Price
F54-125-777	0-22" Electronic Depth Gage	\$229.55	\$158.20

Long Range Indicator Test Set

- · For direct measurements.
- · Dial rotates for setting at any point.
- · Includes mag base with post and dual diameter rod.
- Includes indicator which features 1" range; .001" graduations; reading: 0-100; 2-1/4" dial diameter and includes rod connector and holding clamp.
- · Carbide contact point.
- Includes shop-hardened case.



Order Number	Description	List Price	Sale Price
F52-520-707	Long Range Indicator Test Set	\$130.00	\$110.00

26


Economy Depth Micrometers



- Satin chrome finish
- Base surface hardened, ground & lapped.
- Ratchet thimble
- Locking clamp
- .001" Graduation
- Rod diameter: .176"
- · Includes shop-hardened case.


Order Number	Range	Graduation	Base	List Price	Sale Price
F52-225-110	0-4"	.001"	2.5"	\$112.60	\$99.80
F52-225-112	0-6"	.001"	2.5"	136.80	122.60
F52-225-114	0-4"	.001"	4"	119.30	107.00
F52-225-116	0-6"	.001"	4"	142.50	136.50

Economy Digit Counter Depth Micrometer



- · Microfine .001" graduations.
- 4" base constructed of tool steel, hardened and ground.
- Satin chrome finish
- Ratchet thimble
- · Locking clamp
- · Rod diameter: .176"
- · Includes wrench and fitted case.

Order Number	Range	Graduation	Base	List Price	Sale Price
F52-225-176	0-6"	.001"	2.5"	\$141.05	\$132.00
F52-225-226	0-6"	.001"	4"	152.90	140.00

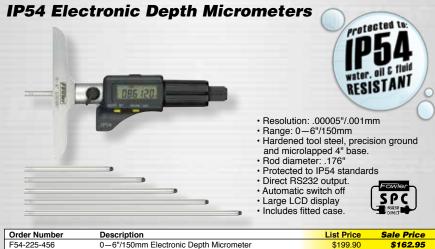

Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

Winter 2014

TRA-RANCE[®] Inside Micrometer

- Range: .2-2.2"
- Satin chrome finish on barrel and thimble.
- Microfine graduations (.001") on a satin chrome finish permit easy reading.
- Accuracy: ±.0002" (.005mm)
- · Ratchet stop thimble
- · Easy zero adjustment on the sleeve.
- · Meets or exceeds Federal accuracy specs.
- · Includes a setting ring.
- · Includes a spanner wrench and a fitted case.

Order Number	Description	Range	List Price	Sale Price
F52-275-005	Inside Micrometer	.2 - 2.2"	\$146.70	\$121.50

Inside Micrometers

- Each set consists of an inside micrometer head and a series of fully hardened and lapped extension rods of different lengths.
- Anvil and spindle are hardened and precision ground with microlap finish on ends.
- · Spindle thread hardened, ground & lapped.
- · .001" Microfine graduations on satin chrome.
- · Positive locking nut on spindle.
- · Meets or exceeds Federal accuracy specs.
- · Reference standard included with set.

Special Low-Price

· Includes a wrench and a fitted case.

*Larger Ranges and Metric Units Available! Contact the Fowler Technical Department.

Order Number	Description	List Price	Sale Price
F52-243-026-1	2"-6" Inside Micrometer	\$116.50	\$89.00
F52-243-212-1	2"-12" Inside Micrometer	141.10	119.00
F52-243-220-1	2"-20" Inside Micrometer	186.50	144.00

Ultra-Cal III Electronic Groove & Recess Gage



- External measurement 0-12" depending on accessories.
- Internal measurement 1-13/16"-13-1/2" depending on accessories.
- · Resolution: .0005"(.01mm)
- Accuracy: ±.0015"(.04mm)
- Sylvac capacitive measuring system.

- Measures rotors and brake drums.
- Two preset memories.
- Inch/metric conversion.
- Interchangeable anvils for inside/outside measurement.

Limited Quantities!

NEW!

- · Includes flat and point style contacts & battery.
- Uses 4-48 thread contact points.
- 4.5" Jaw length

Order Number	Description	List Price	Sale Price
F54-150-012	NEW 0-12" Ultra-Cal III Electronic Groove & Recess Gage	\$1149.50	\$750.00
F54-115-333	RS-232 Cable	119.00	



Includes setting ring!

RANGE: .2" to 2.2"!





OWIER TOOL-A-THON

Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

29

Winter 2014

Bore Gage Setting Master Kit - Inch & Metric

Fowler's Bore Gage Setting Master Kit is used for accurately setting any bore gage up to 6"/150mm in diameter to an accuracy of .0001"/.003mm

Each Set includes:

Setting Device

- Base anvil: 2.750" x .80"
- Adjustable anvil 2.375" x .375" (two each)
- Internal capacity: 6"/150mm
- Depth capacity: 1"/25mm
- Centralizer capacity width: 2.625"/66.7mm
- Quick-release holder for fast adjustment.
- Can also be used for external setting, depending on application

Economy Gage Block Sets

Inch model:

- 36 piece
- Tolerances to .00005"
- Certificate of Calibration to N.I.S.T.

Metric model:

- 33 piece
- AS-2 grade
- · Certificate of Calibration to N.I.S.T.

Bore gage setting maste
and gage block set.
All in a custom-fitted
aluminum case!

Includes



Or	rder Number	Description	List Price	Sale Price
F5	53-646-000	Inch Bore Gage Setting Master Kit	\$275.00	\$198.95
F5	53-646-010	Metric Bore Gage Setting Master Kit	\$295.00	\$259.80

Extender-E Electronic 1.4" to 6" Dial Bore Gage Set Industry's two most popular bore gage ranges combined in one easy-to-use ELECTRONIC set! All the same benefits included in the X-Tender Dial Bore Gage are

All the same benefits included in the X-Tender Dial Bore Gage are now available with an electronic indicator providing inch/metric reading capability. Preset size of master for absolute reading and minimum hold feature to lock on the bore size as the gage is rocked in the part to be measured.

	Bore Gage Features: • Range: 1.4"-6"/35mm-150mm • Carbide anvils • Easily adjustable • Self-centering • Includes extension holder • Shop hardened case Indicator Features:
ABSISET ZEROCON MIN CAL	 Dual reading inch/metric electronic indicator. Bar graph and numeric digital display Resolution: .00005"/.001mm Preset with recall ABS/INC measurement Min/Max/TIR
	cludes FREE tructional CD! For instructional video search "X-tender Bore Gage" at www.youtube.com

Order Number	Description	List Price	Sale Price
F54-646-401	XTender-E Bore Gage Set	\$301.90	\$265.80
F54-100-350	CR2032 Battery	5.50	

30

	E Internal &	EVICI		ICCLI		Janp	ci dage.
			• Ro • Lai • Re • Aci • Ba	bust hous rge LCD o ading: .0 curacy: .0 ttery: CR2 ring loade	sing display I"/.1mm/ [.] I1"/.3mm/ 2032	1/64ths /1/64ths	
			0	F54-55	4-730	6	
Order Number	Description			nge		t Price	Sale Price
F54-554-630 F54-554-730 F54-100-350	Outside Caliper Gage Inside Caliper Gage CR2032 Battery			50mm 150mm		\$44.25 44.25 5.50	\$36.20 36.20
nternal & l	External Elec	ctron	ic Ca	alipe	r Gag	jes	A-THO.
		_				Too	T CEILER!
	- Committee					BE	SI JLLE MO
1207	00050					1	ER HIGH PRO
		1				6	
F54-554-611		F				2	8 J.
		1			- 1002	- 0.	0976
	Preset cap Direct inch		nversion		¢ 1007	- 0.	1976
Rugged housing Large, LCD display Resolution: .0002"/.0	• Direct inch/ • Absolute/In • High-impac	metric co crementa	I measu	rements	* 1.00±	- 0.1 F5	54-554-711
Rugged housing Large, LCD display Resolution: .0002"/.0	• Direct inch/ • Absolute/In 005mm • High-impac .02mm	metric co crementa t, aircraft ensions for	Il measu aluminu Internal Ca	rements m case	* 1002		
Rugged housing Large, LCD display Resolution: .0002"/.0	• Direct inch/ • Absolute/In • High-impac .02mm <u>Dimmeters</u>	(metric co crementa ct, aircraft ensions for etric 15mm	I measu aluminu Internal Ca Inch 0.2-0.6"	rements m case lipers L 20mm	<u>\$</u> 1.0mm	<u>Н</u> 1.5mm	Tip Radius 0.3mm
Rugged housing Large, LCD display Resolution: .0002"/.0	• Direct inch • Absolute/In 005mm • High-impac 02mm 5-1 5-2	metric co crementa et, aircraft ensions for etric 15mm 25mm	Internal Ca Inch 0.2-0.6" 0.2-1.0"	lipers 20mm 35mm	1.0mm 1mm	H 1.5mm 1.5mm	Tip Radius 0.3mm 0.3mm
Rugged housing Large, LCD display Resolution: .0002"/.0	• Direct inch/ • Absolute/In 005mm • High-impac .02mm <u>Dim</u> <u>Meters</u> 5-3 10 20	Ametric co crementa et, aircraft ensions for tric 5mm 25mm 30mm -40mm	Il measur aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.8-1.6"	Ilipers 20mm 35mm 80mm	1.0mm 1mm 2mm 3mm	H 1.5mm 1.5mm 3.5mm 6.5mm	Tip Radius 0.3mm 0.3mm 0.5mm 0.5mm
Rugged housing Large, LCD display Resolution: .0002"/.0	• Direct inch/ • Absolute/In 005mm • High-impac .02mm <u>Dim</u> <u>Meters</u> 5-3 10 20	Ametric co crementa et, aircraft ensions for tric 5mm 25mm 30mm -40mm	Il measur aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2"	lipers 20mm 35mm	1.0mm 1mm 2mm	H 1.5mm 1.5mm 3.5mm	Tip Radius 0.3mm 0.3mm 0.5mm
Rugged housing Large, LCD display Resolution: .0002"/.0	• Direct inch/ • Absolute/In • High-impac .02mm	Ametric co crementa t, aircraft ensions for tric 55mm -30mm -30mm -50mm ensions for	Il measur aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.8-1.6" 1.2-2.0" External Ca	rements m case lipers 20mm 35mm 55mm 80mm 80mm	1.0mm 1mm 2mm 3mm 3mm	H 1.5mm 1.5mm 3.5mm 6.5mm 8.5mm	Tip Radius 0.3mm 0.5mm 0.5mm 0.5mm 0.5mm
Rugged housing Large, LCD display Resolution: .0002"/.0	Direct inch/ Absolute/In High-impace Dim <u>Mim</u> <u>S-1</u> 10 20 30 <u>Dim</u> <u>Mim</u> <u>Mim</u> <u>S-1</u> <u>10</u> <u>20</u> <u>30</u> <u>Dim</u>	/metric co crementa t, aircraft ensions for tric 55mm -30mm -40mm -50mm ensions for etric 10mm	Il measur aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.8-1.6" 1.2-2.0" External Ca Inch 0-0.4"	rements m case lipers 20mm 35mm 55mm 80mm 80mm 80mm 80mm	1.0mm 1mm 2mm 3mm 3mm S 3mm	H 1.5mm 1.5mm 3.5mm 6.5mm 8.5mm H 8mm	Tip Radius 0.3mm 0.5mm 0.5mm 0.5mm Tip Radius 0.5mm
Rugged housing Large, LCD display Resolution: .0002"/.0	• Direct inch/ • Absolute/In • High-impac	/metric co crementa ensions for ensions for ensions for 55mm -40mm -40mm -50mm ensions for etric 10mm 20mm	Il measu aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.4-1.2" 0.8-1.6" 1.2-2.0" External Ca Inch 0-0.4" 0-0.4"	rements m case lipers 20mm 35mm 55mm 80mm 80mm alipers L 40mm 80mm	1.0mm 1mm 2mm 3mm 3mm 5 3mm 6.5mm	H 1.5mm 3.5mm 6.5mm 8.5mm H 8mm 25mm	Tip Radius 0.3mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm
Rugged housing Large, LCD display Resolution: .0002"/.0	Direct inch/ Absolute/In O2mm Dim High-impac	Imetric co crementa it, aircraft ensions for etric 15mm 25mm 25mm 25mm 26mm 20mm 20mm 20mm 20mm	Il measur aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.8-1.6" 1.2-2.0" External Ca Inch 0-0.4"	rements m case lipers 20mm 35mm 55mm 80mm 80mm 80mm 80mm	1.0mm 1mm 2mm 3mm 3mm S 3mm	H 1.5mm 1.5mm 3.5mm 6.5mm 8.5mm H 8mm	Tip Radius 0.3mm 0.5mm 0.5mm 0.5mm Tip Radius 0.5mm
Rugged housing Large, LCD display Resolution: .0002"/.0	• Direct inch/ • Absolute/In • High-impac	Imetric co crementa t, aircraft ensions for tric ISmm 40mm 40mm 50mm ensions for tric 00mm 20mm 30mm 40mm	Il measu aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.8-1.6" 1.2-2.0" External C: Inch 0-0.4" 0-0.8" 0.4-1.2"	Image: the second secon	1.0mm 1mm 2mm 3mm 3mm 6.5mm 6.5mm	H 1.5mm 1.5mm 6.5mm 8.5mm H 8.5mm 25mm	Tip Radius 0.3mm 0.3mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm
Rugged housing arge, LCD display Resolution: .0002"/.0 Accuracy: ±.0008"/±.	Direct inch/ Absolute/In High-impace Dim High-impace Dim Me S-1 10 20 30 Dim Me S-1 10 20 30 Dim Me S-1 10 20 30 Dim Me S-1 10 20 30 Dim Me S-1 10 20 30 S-1 10 20 30 S-1 10 20 30 S-1 10 20 30 S-1 10 20 30 S-1 10 20 30 S-1 10 20 30	Imetric co crementa t, aircraft ensions for tric ISmm 40mm 40mm 50mm ensions for tric 00mm 20mm 30mm 40mm	Il measu aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.8-1.6" External C: Inch 0-0.4" 0-0.4" 0-0.4" 0.8". 0.4-1.2"	rements m case lipers 20mm 35mm 55mm 80mm 80mm 80mm 80mm 80mm 80mm	1.0mm 1mm 2mm 3mm 3mm 6.5mm 6.5mm 6.5mm 6.5mm	H 1.5mm 3.5mm 6.5mm 8.5mm 25mm 25mm 25mm	Tip Radius 0.3mm 0.3mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.75mm 0.75mm
Rugged housing Large, LCD display Resolution: .0002"/.0 Accuracy: ±.0008"/±.	Direct inch/ Absolute/In High-impace Dim High-impace Dim Me S-1 10 20 30 Dim Me S-1 10 20 30 Dim Me S-1 10 20 30 Dim Me S-1 10 20 30 Dim Me S-1 10 20 30 S-1 10 20 30 S-1 10 20 30 S-1 10 20 30 S-1 10 20 30 S-1 10 20 30 S-1 10 20 30	Ymetric co crementa t, aircraft ensions for ttric 15mm -30mm -30mm -50mm -30mm -30mm -30mm -30mm -30mm -30mm -30mm -50mm	Il measu aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.8-1.6" External C: Inch 0-0.4" 0-0.4" 0-0.4" 0.8". 0.4-1.2"	rements m case lipers 20mm 35mm 55mm 80mm 80mm 80mm 80mm 80mm 80mm	1.0mm 1mm 2mm 3mm 3mm 6.5mm 6.5mm 6.5mm 6.5mm	H 1.5mm 1.5mm 6.5mm 8.5mm 8.5mm 25mm 25mm 25mm	Tip Radius 0.3mm 0.3mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.75mm 0.75mm
Rugʻged housing Large, LCD display Resolution: 0002"/.0 Accuracy: ±.0008"/±. S H H H H H H H H H H H H H H H H H H H	Direct inch/ Absolute/In High-impace Dimetric inch/ Absolute/In High-impace Dimetric inch/ High-impace Dimetric inch/ Dimetric inch/ Dimetrinch/ Dime	Ymetric co crementa t, aircraft tric 15mm -30mm -30mm -50mm -50mm -50mm -30mm -30mm -30mm -30mm -30mm -30mm -30mm -30mm -30mm	Il measu aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.8-1.6" External C: Inch 0-0.4" 0-0.4" 0-0.4" 0.8". 0.4-1.2"	rements m case lipers 20mm 35mm 55mm 80mm 80mm 80mm 80mm 80mm 80mm	1.0mm 1mm 2mm 3mm 3mm 6.5mm 6.5mm 6.5mm 6.5mm 6.5mm	H 1.5mm 3.5mm 6.5mm 8.5mm 25mm 25mm 25mm	Tip Radius 0.3mm 0.5mm 0.5mm 0.5mm 0.5mm 0.75mm 0.75mm 0.75mm 0.75mm 0.75mm
Rugged housing Large, LCD display Resolution: .0002"/.0 Accuracy: ±.0008"/±. S H H H F34-554-611 F54-554-622 F54-554-622 F54-554-623	Direct inch/ Absolute/In Mage: Direct inch/ Absolute/In High-impace Direct inch/ Absolute/In Mage: Direct inch/ Absolute/In Mage: Direct inch/ Absolute/In Mage: Direct inch/ Absolute/In Mage: Direct inch/ Absolute/In Mage: Direct inch/ Mage: Direct inch/ Mage: Direct inch/ Mage: Direct inch/ Mage: Direct inch/ Mage: Direct inch/ Mage: Direct inch/ Mage: Direct inch/ State Direct inch/ Mage: Direct inch/ State Direct inch/ Direct inch/ Direct inch/ State Direct inch/ Direct inch/ Dinch/ Direct inch/ Direct inch/ Direct i	Ymetric co crementa t, aircraft ismm 55mm 30mm -50mm -50mm ensions for tric 40mm -50mm -50mm -50mm -50mm -50mm -50mm -50mm -50mm	Il measu aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.8-1.6" External C: Inch 0-0.4" 0-0.4" 0-0.4" 0.8". 0.4-1.2"	rements m case lipers 20mm 35mm 55mm 80mm 80mm 80mm 80mm 80mm 80mm	1.0mm 1mm 2mm 3mm 3mm 6.5mm 6.5mm 6.5mm 6.5mm 6.5mm 6.5mm	H 1.5mm 1.5mm 3.5mm 6.5mm 6.5mm 8.5mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm	Tip Radius 0.3mm 0.3mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.75mm 0.75mm<
Rugged housing Large, LCD display Resolution: .0002"/.0 Accuracy: ±.0008"/±. S H H H FS4-554-611 FS4-554-623 F54-554-623 F54-554-623 F54-554-624	Direct inch/ Absolute/In High-impace Dimetric inch/ Absolute/In High-impace Dimetric inch/ High-impace Dimetric inch/ Metric inch/ Dimetric inch/ Dimetrinch/ Dimetr	Ymetric co crementa t, aircraft ensions for etric 55mm -30mm -30mm -50mm -30mm -30mm -30mm -30mm -30mm -50mm	Il measu aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.8-1.6" External C: Inch 0-0.4" 0-0.4" 0-0.4" 0.8". 0.4-1.2"	rements m case lipers 20mm 35mm 55mm 80mm 80mm 80mm 80mm 80mm 80mm	1.0mm 1mm 2mm 3mm 3mm 6.5mm 6.5mm 6.5mm 6.5mm 6.5mm 11 11 11 11 11 11	H 1.5mm 3.5mm 6.5mm 6.5mm 8.5mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm	Tip Radius 0.3mm 0.5mm 0.5mm 0.5mm 0.5mm 0.75mm
Rugged housing Large, LCD display Resolution: .0002"/.0 Accuracy: ±.0008"/±.	Direct inch/ Absolute/In Mage: Direct inch/ Absolute/In High-impace Direct inch/ Absolute/In <u>Mage:</u> <u>Direct inch/</u> Absolute/In <u>Mage:</u> <u>Direct inch/</u> <u>Absolute/Inch/</u> <u>Direct inch/</u> <u>Absolute/Inch/</u> <u>Direct inch/</u> <u>Absolute/Inch/</u> <u>Direct inch/</u> <u>Absolute/Inch/</u> <u>Direct inch/</u> <u>Direct inch/</u> <u>Absolute/Inch/</u> <u>Direct inch/</u> <u>Direct inch/</u> <u>Direct inch/</u> <u>Direct inch/</u> <u>Absolute/Inch/</u> <u>Direct inch/</u> <u>Direct inch/</u>	Ymetric co crementa t, aircraft ensions for etric 55mm -30mm -30mm -50mm -30mm -30mm -30mm -30mm -30mm -50mm	Il measu aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.8-1.6" External C: Inch 0-0.4" 0-0.4" 0-0.4" 0.8". 0.4-1.2"	rements m case lipers 20mm 35mm 55mm 80mm 80mm 80mm 80mm 80mm 80mm	1.0mm 1mm 2mm 3mm 3mm 5.5mm 6.5mm 6.5mm 6.5mm 11 11 11 11 11 11 11 11 11	H 1.5mm 1.5mm 3.5mm 6.5mm 6.5mm 2.5mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm	Tip Radius 0.3mm 0.3mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.75mm 0.75mm<
Rugged housing Large, LCD display Resolution: .0002"/.0 Accuracy: ±.0008"/±.	Direct inch/ Absolute/In High-impace Dimetric inch/ Absolute/In High-impace Dimetric inch/ Absolute/In Metric inch/ Metric inch/ Dimetric inch/ Absolute/Inch/ Dimetric inch/ Metric inch/ Dimetric inch/ Metric inch/ Dimetric inch/ Dinch/ Dimetrinch/ Dimetrinch/ Dimetrinch/ Dimet	Ymetric co crementa t, aircraft ensions for etric 55mm -30mm -30mm -50mm -30mm -30mm -30mm -30mm -30mm -50mm	Il measu aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.8-1.6" External C: Inch 0-0.4" 0-0.4" 0-0.4" 0.8". 0.4-1.2"	rements m case lipers 20mm 35mm 55mm 80mm 80mm 80mm 80mm 80mm 80mm	1.0mm 1mm 2mm 3mm 3mm 5.5mm 6.5mm 6.5mm 6.5mm 11 11 11 11 11 11 11 11 11	H 1.5mm 3.5mm 6.5mm 6.5mm 8.5mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm	Tip Radius 0.3mm 0.5mm 0.5mm 0.5mm 0.5mm 0.75mm
Rugʻged housing Large, LCD display Resolution: .0002"/.0 Accuracy: ±.0008"/±. s - H - H - H - H - H - H - H - H - H - H	Direct inch/ Absolute/In High-impace Dimetric inch/ Absolute/In High-impace Dimetric inch/ Absolute/In Metric inch/ Metric inch/ Dimetric inch/ Absolute/Inch/ Dimetric inch/ Metric inch/ Dimetric inch/ Metric inch/ Dimetric inch/ Dinch/ Dimetrinch/ Dimetrinch/ Dimetrinch/ Dimet	Ymetric co crementa t, aircraft ensions for etric 55mm -30mm -30mm -50mm -30mm -30mm -30mm -30mm -30mm -50mm	Il measu aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.8-1.6" External C: Inch 0-0.4" 0-0.4" 0-0.4" 0.8". 0.4-1.2"	rements m case lipers 20mm 35mm 55mm 80mm 80mm 80mm 80mm 80mm 80mm	1.0mm 1mm 2mm 3mm 3mm 6.5mm 6.5mm 6.5mm 6.5mm 6.5mm 11 12 14 14 14 14 14 14 14 14 14 14	H 1.5mm 1.5mm 3.5mm 6.5mm 6.5mm 2.5mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm	Tip Radius 0.3mm 0.5mm 0.5mm 0.5mm 0.5mm 0.75mm
Rugged housing Large, LCD display Resolution: .0002"/.C Accuracy: ±.0008"/±. S H H Fs4-554-611 F54-554-623 F54-554-623 F54-554-623 F54-554-623 F54-554-623 F54-554-623 F54-554-625 F54-50-350 External Caliper (Order Number F54-554-711	Direct inch/ Absolute/In High-impace Direct inch/ Absolute/In High-impace Direct inch/ Absolute/In <u>Me</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u> <u>200</u>	Ymetric co crementa t, aircraft ismm 55mm 30mm -50mm -	Il measu aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.8-1.6" External C: Inch 0-0.4" 0-0.4" 0-0.4" 0.8". 0.4-1.2"	rements m case lipers 20mm 35mm 55mm 80mm 80mm 80mm 80mm 80mm 80mm	1.0mm 1mm 2mm 3mm 3mm 5.5mm 6.5mm 6.5mm List 18 18 18 List	H 1.5mm 1.5mm 3.5mm 6.5mm 6.5mm 2.5mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm	Tip Radius 0.3mm 0.5mm 0.5mm 0.5mm 0.5mm 0.75mm
Rugged housing Large, LCD display Resolution: .0002"/c Accuracy: ±.0008"/±.	Direct inch/ Absolute/In Meganomic inch/ Absolute/In High-impace Dime Meganomic inch/ Absolute/In Meganomic inch/ Absolute/In Meganomic inch/ Absolute/In Meganomic inch/ Absolute/Inch/ 200 200 20 200	Ymetric co crementa t, aircraft ensions for tric 15mm -30mm -30mm -50mm -30mm	Il measu aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.8-1.6" External C: Inch 0-0.4" 0-0.4" 0-0.4" 0.8". 0.4-1.2"	rements m case lipers 20mm 35mm 55mm 80mm 80mm 80mm 80mm 80mm 80mm	1.0mm 1mm 2mm 3mm 3mm 6.5mm 6.5mm 6.5mm 6.5mm 6.5mm 11 11 11 11 11 11 11 11 11 11 11 11 1	H 1.5mm 1.5mm 3.5mm 6.5mm 6.5mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25m5 25.85 35.8	Tip Radius 0.3mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.75mm 0
Rugʻged housing Large, LCD display Resolution: .0002"/.0 Accuracy: ±.0008"/±. nternal Caliper G Order Number F54-554-621 F54-554-623 F54-554-623 F54-554-624 F54-554-625 F54-100-350 External Caliper G Order Number F54-554-711 F54-554-712 F54-554-722 F54-554-723	Direct inch/ Absolute/In High-impace Dime High-impace Dime High-impace Dime Methods Single Dime Methods Single Range 200"-590"/5-15 200"-19"/5-25 200"-1.2"/10-30 CR2032 Battery Gages Range 0400"/0-10m 0790"/0-20m .4"-1.2"/10-30	metric co crementa t, aircraft tric 15mm -50mm -	Il measu aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.8-1.6" External C: Inch 0-0.4" 0-0.4" 0-0.4" 0.8". 0.4-1.2"	rements m case lipers 20mm 35mm 55mm 80mm 80mm 80mm 80mm 80mm 80mm	1.0mm 1mm 2mm 3mm 3mm 6.5mm 6.5mm 6.5mm 6.5mm 6.5mm 11 11 11 11 11 11 11 11 11	H 1.5mm 3.5mm 6.5mm 8.5mm H 8mm 25mm 25mm <td>Tip Radius 0.3mm 0.5mm 0.5mm 0.5mm 0.5mm 0.75mm</td>	Tip Radius 0.3mm 0.5mm 0.5mm 0.5mm 0.5mm 0.75mm
Easy to hold Rugged housing Large, LCD display Resolution: .0002"/.0 Accuracy: ±.0008"/±. <i>s</i> - H <i>s</i> -	Direct inch/ Absolute/In Meganomic inch/ Absolute/In High-impace Dime Meganomic inch/ Absolute/In Meganomic inch/ Absolute/In Meganomic inch/ Absolute/In Meganomic inch/ Absolute/Inch/ 200 200 20 200	Ymetric co crementa t, aircraft ismm Somm -Somm	Il measu aluminu Internal Ca Inch 0.2-0.6" 0.2-1.0" 0.4-1.2" 0.8-1.6" External C: Inch 0-0.4" 0-0.4" 0-0.4" 0.8". 0.4-1.2"	rements m case lipers 20mm 35mm 55mm 80mm 80mm 80mm 80mm 80mm 80mm	1.0mm 1mm 2mm 3mm 3mm 5.5mm 6.5mm 6.5mm 6.5mm List 11 11 12 14 14 14 14 14 14 14 14 14 14	H 1.5mm 1.5mm 3.5mm 6.5mm 6.5mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25mm 25m5 25.85 35.8	Tip Radius 0.3mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.5mm 0.75mm 0

t s

Winter 2014

TRA-VALUE 9" Electronic Level

Fowler's 9" Laser Level provides instant 4 x 90° digital inclination display. With embedded magnets on its measuring surface, a beamsplitter projects a 90° laser cross hair for leveling at-adistance. It also includes a 1/4-20 mount for tripod use.

- Measuring range: 4 x 90°
- Resolution: .05
- Accuracy: ±.2°
- Repeatability: ±.05
- Standard 9 volt battery (250 hours life)
- Dimensions: 9"L x 1"W x 2-1/4"H
- Includes two-way level and plumb vials.
- · Reversible reading for inverted use.



\$67.15

\$55.99

Order Number E54-440-600

Description Xtra-Value 9" Electronic Level

Protraci



The mini-MAG Protractor provides instant 360° digital inclination display of any angle with the additional unique feature of embedded magnets on both sides and the bottom which make it ideal for a variety of measurements.

- Embedded magnets with 3.5lb. pull
- Uses standard 9V battery (250 hrs.)

OOL-A-THON

WLER HIGH P

- Measuring range: 360° (4 x 90°) ٠
- Display automatically inverts
- Resolution: .05°
- Accuracy: ±.2°
- Repeatability: .05%
- Hold feature

Dimensions: L: 2.375" x W: 1.375" x H: 2.375"

Display inverts for easy reading!

Order Number	Description	List Price	Sale Price
F54-422-450-1	Mini-Mag Protractor	\$89.55	\$69.50

Fowler Digi-Pro Electronic Protractor

The Digi-Pro electronic protractor includes embedded magnets for unique measurement areas. On/Off, Zero, Hold and Reverse feature to invert the display for easier reading in certain situations.

- Embedded 25 lb. pull magnets ٠
- Full, 360° measuring range
- Accuracy: ±.2°
- Repeatability: ±.05°
- Resolution: .05°
- Invertible display feature
- Voltage: Standard 3V lithium battery





USE THE DIGI-PRO TO MAKE FAST AND ACCURATE ANGULAR MEASUREMENTS!

Order Number	Description	List Price	Sale Price
F54-440-740-1	4" Digi-Pro Electronic Protractor	\$82.50	\$62.80
F54-440-775-1	12" Digi-Pro Electronic Protractor	98.95	67.80
F54-100-350	CR2032 Battery	5.50	

Bevel Protractor with 6" & 12" Blades



2 Dimensional Coaxial Indicator Sets

Use the 2D Coaxial Set for accurate component centering and positioning in most machining applications. The 2D Coaxial indicator can be used at any angle and the dial remains stationary during the rotation of the machine spindle.

> GREAT SHOP TOOL!

Features:

- Indicator assembly with 1.6" (42.5mm) diameter dial
- Graduations and revolution counter .0005" (.01mm)
- · 3 Internal and 3 External feelers
- Center point feeler
- Restraining arm
- Complete in a fitted case

Specifications:

- Length: 6-7/8" (175mm)
- Shank: 3/8" dia. x 7/8" (10mm x 20mm) long Feeler ball: 1/8" (3mm) dia.
- · Dial readings: 0-50
- · Measuring range: .250" (6mm) axis offset
- · Speed-recommended not to exceed approx. 800 RPM
- Locating accuracy to within .0002" (.005mm) of true center
- Capacity depends on feelers installed, but overall range is 5/32-12" (4-300mm) internal diameter; 0-12" (0-300mm) external diameter

Order Number	Description	List Price	Sale Price
F52-710-025	2D Coaxial Set-Inch	\$223.10	\$166.80
F52-710-030	2D Coaxial Set-Metric	223.10	166.80

Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

33

nter 2014



Along with light indication, model #F54-575-650 emits an audible "beep" at time of contact.

Order Number	Stylus	Shank	Audible	Battery	List Price	Sale Price
F54-575-600	.200"	1/2"	NO	12 volt	\$28.00	\$22.85
F54-575-625	.200"	1/2"	NO	12 volt	98.75	87.95
F54-575-650	.400"	3/4"	YES	12 volt	98.75	87.95

34

TOOL-A-THON

Rules

- **EZ-Read Black Face Rules** Hardened stainless steel
- · White easy-to-read microfine graduations against a black, non-glare finish.

Satin Chrome Rules Tempered steel

- · Non-glare
- · Sharp, easy-to-read microfine graduations

- Golden Rules
- · Titanium coated for superior wear resistance.
- Non-glare finish=RC80
- Scratch resistant microfine graduations with excellent clarity and contrast.

RIGID STEEL RULES

Order Number	Finish	Size	Reading	List Price	Sale Price
F52-330-006	Satin Chrome	6"	4R	\$9.90	\$8.60
F52-337-006	Black	6"	4R	8.35	6.25
F52-339-006	Golden	6"	4R	20.60	17.25
F52-330-012	Satin Chrome	12"	4R	17.20	14.60
F52-337-012	Black	12"	4R	17.20	10.70
F52-339-012	Golden	12"	4R	39.55	33.80
F52-340-006	Satin Chrome	6"	5R	9.50	7.55
F52-347-006	Black	6"	5R	8.35	6.25
F52-349-006	Golden	6"	5R	20.60	17.25
F52-340-012	Satin Chrome	12"	5R	15.60	14.60
F52-347-012	Black	12"	5R	17.20	10.95
F52-349-012	Golden	12"	5R	39.55	33.80

GRADUATIONS 4R: 8ths, 16ths, 32nds, 64ths

5R: 32nds, 64ths, 10ths, 100ths

FLEXIBLE STEEL RULES

a constant of the county

Order Number	Finish	Size	Reading	List Price	Sale Price
F52-295-006	Satin Chrome	6"	4R	\$9.50	\$7.05
F52-297-006	Black	6"	4R	7.80	5.75
F52-299-006	Golden	6"	4R	20.30	17.70
F52-295-012	Satin Chrome	12"	4R	14.60	13.00
F52-297-012	Black	12"	4R	12.00	9.90
F52-299-012	Golden	12"	4R	36.40	31.20
F52-300-006	Satin Chrome	6"	5R	9.50	7.05
F52-307-006	Black	6"	5R	7.80	5.75
F52-309-006	Golden	6"	5R	20.30	17.70
F52-300-012	Satin Chrome	12"	5R	14.60	13.00
F52-307-012	Black	12"	5R	12.00	9.90
F52-309-012	Golden	12"	5R	36.40	31.20

6"/150mm Pocket Steel Rule

· Rounded edge prevents damage to shirt pocket. · Rule width: .470"

........

- Inch graduations are in 64ths.
- aala ia ia ta
- · Rule thickness: .021"



Metric scale is in	n 1mm increments.		
Order Number	Description	List Price	Sale Price
F52-380-100	6"/150mm Pocket Steel Rule	\$6.25	\$4.95

Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

Rest SE

ER HIGH P



36



- For grinding, milling or drilling.
- Made of hardened and precision ground tool steel.
- Sides are parallel and vee is central and ground.
- · Central hole is provided for drilling or removing pins.
- V-Block has four 3/8"-16 tapped holes, two in the bottom and one on each side for angle non-clamping.
- Dimensions: 3-5/8" long x 1-7/8" wide x 1-7/8" high (including clamp).
- Holding capacity: 1-5/16"

Order Number	Description	List Price	Sale Price
F52-475-050	All-Angle V-Block and Clamp	\$71.50	\$59.90

V-Block Set

- · 2" height x 2-3/4" length x 2" width
- Two clamps, with screw hole at 90 degrees for positive clamping of work, are included.
- · Clamping capacity; 2"(50mm.)
- V-Blocks are constructed with stepped grooves which allow the clamps to be inserted without protrusion, thus allowing V-Blocks to be used on base, ends or sides.
- Hardened steel. All sides of V-Blocks precision ground parallel and square within .0002".
- Matched pair of V-Blocks are perfectly aligned with 90 degree V-grooves ground central and parallel to the sides and base.



Order Number	Description	List Price	Sale Price
F52-475-555	V-Block Set	\$223.10	\$148.00

SHOP-BLOX V-Block Sets

· Accuracy: .001"

- Parallelism tolerance: ±.0005"
- Perpendicularity tolerance: ±.0005"
- · All sides are ground square and parallel to each other.
- · V-slots and centered, parallel and square to each other in pairs.
- Constructed of heat-treated and hardened tool steel.
- Ideal for setup, milling, grinding and drilling applications.

1		1
	1	
	•	19

Internal clamping type

Order Number	Dimensions	Clamping Type	Capacity	List Price	Sale Price
F52-475-005-1	1-5/8" x 1-1/4" x 1-1/4"	External	1"	\$108.90	\$39.00
F52-475-010-1	2" x 1-1/2" x 1-1/2"	External	1-1/2"	176.00	70.00
F52-475-015-1	2-3/4" x 2-1/2" x 1-3/4"	Internal	1-1/2"	203.50	99.00
F52-475-020-1	4-7/8" x 3-1/2" x 2-3/4"	Internal	2-1/8"	396.00	180.00

Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

External clamping type

Winter 2014

Winter 2014

7.600

owler

Z-600 1D Motorized Height Gage

Features:

- Measuring Range: 24"/600mm
- · Expandable Range: 36"/915mm
- Resolution: .00005"/.001mm
- Accuracy: .0002"/.0054 μm
- Motorized movement
- · Easy-to-use icon driven display
- Ergonomic design
- · Built-in pump provides air cushion to reduce wear and fatigue

Fowler 7-600

NEW!

- · Multiple reference at any point
- USB output
- 1 year warranty

Measurement Features:

- · Heights, depths
- ID/OD Measurements
- · Centerline measurements
- Groove & Ledge measurement
- Squareness measurement capability**
- Parallelism measurement
- Preset at any point
- 1D Measurement
- Inch/metric conversion
- * With standard probe (4mm ball)
- ** With electronic probe Fowlerscan50

*Receive a FREE 10mm Ball Probe with Purchase!

Order NumberDescriptionList PriceSale PriceF54-180-600NEW Z600 Electronic Height Gage\$4899.00\$3999.00



Optical C	G C C C C C C C C C C C C C	REAT for Work Spaces!	omparator is economica for basic comparative an asurements and includes Includes: T-Siot V-Blocks & T-Siot Centers shown above!	d 🚺
Order Number F53-900-100 F53-900-000	Description Optical Comparator with A Optical Comparator ONL		List Price Sale Pric \$2475.00 \$2150.0 2219.00 1899.0	<mark>e</mark> D
		Sylvac of Switzstand	H. Cal	ON
 Direct RS-232 out The Sylvac measuremea	aring sys- lly fast (60" se) and e and main- em ever arement onversion "/.01mm 04"/10µm de x 6.8" by oil, netism,	 Measurement of i centerlines, heigh MIN/MAX/TIR cap Excellent repeatal carriage Intuitive functions. Great mobility High reliability Data output USB Battery life: 40 ho tion Touch sensitive pi Base with small for 	"/.0034 µm ing force, from 0.2N nternal and external diameters ts, widths, depths, surfaces. ability bility thanks to the motorized /minimizes key strokes and RS-232 urs rechargeable during opera- robe speed for easy operation potprint	
Smm Ball P. with Purch		ball probe Ø3mm, certificate.	ve cover, charging set, ruby , setting gage and calibration nge List Price Sale Price	r 20
F54-212-024-1 24"/6	00mm \$1725.00 \$1399.0		50mm \$4437.00 \$4150.00	14

4 & 8 Drive Pin Punch Sets

- · Finished in black nitrate. Made of chrome alloy steel. Hardened on both ends.
- · Knurled finger grip for easy handling.
- · Length is 4".
- 4 punch set: 3/16", 7/32", 1/4" and 5/16"
- 8 punch set: 1/16", 3/32", 1/8", 5/32", 3/16", 7/32", 1/4" and 5/16"
- · Includes fitted case.

Order Number	Description	List Price	Sale Price
F52-500-200	4 Drive Pin Punch Set	\$12.10	\$5.50
F52-500-255	8 Drive Pin Punch Set	17.15	7.80

Extra Long Drive Pin Punch Set

- · Black nitrate finished housing. Made of chrome alloy steel. Hardened on both ends.
- · Knurled finger grip. Length is 8".
- Point sizes: 1/8", 3/16", 1/4", 5/16" and 3/8"
- Includes fitted case.

Order Number	Description	List Price	Sale Price
F52-500-300	Extra Long Drive Pin Punch Set	\$16.05	\$11.35
Knurled finger gri All sizes marked	nitrate el; hardened both ends. el; for easy handling. for fast and easy use. 5/64", 7/64", 9/64" and 11/64"	1	11
Order Number	Description	List Price	Sale Price
F52-500-015	Center Punch Set	\$11.45	\$7.00

- and tempered tool steel, black oxide finished.
- · All sizes are marked and diameters are slightly undersized for easy handling.
- · Supplied with index stand

TOOL-A-THON

Order Number	Description	Range	List Price	Sale Price
F52-482-028	28 Piece Transfer Punch Set	3/32"-1/2"	\$48.95	\$34.90
F52-482-030	NEW 33 Piece Transfer Punch Set	1/2"-1"	85.00	72.99

BEST S

ER HIGH

in a w Vit

Screwari	er kit			
Anna		NE	:W!	
111.1				
		 This precision Screwdriver ar work. Features knurled and chrome 		
		 Screwdriver and Tool Set com point scratch awl and 1 ma Screwdriver size range: #00, 	ntains 9 screwdriv Ignetic pick-up	vers, 1 tapered
11111	111113	3/32" and 1/8".		
Order Number	Description	1	List Price	Sale Price
F52-490-003	NEW Screw	wdriver Set	\$24.20	\$20.99

F52-490-003 40



A complete kit for Machine Shop Applications!

Set includes:

- 1 Universal Handle
- 2 Adapters

Order Number

F52-483-888

- 2 Deburring Blades
- 1 Countersink for 12mm/.47" diameter.
- 1 Countersink for 20mm/1.18" diameter.
- 4 Cleaner Blades, for sheet metal, small ridges, relieving corners and for narrow slots.

Description Universal Deburring, Cle

Combined in a compact molded case.



			N
	List Price	Sale Price	0
eaning & Countersink Set	\$51.50	\$36.35	-

Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

41

Metal Etching Pen

A "must" for any tool room and machine shop for general marking purposes, Fowler's metal etching pen is used on copper, copper alloy, stainless steel, hardened steel tools and castings, etc.

Use it to initial personal tools. Its low-cost, disposable design offers limitless applications.

Personalize your tools!

NEW!

Order Number F52-730-005	Description			
			List Price	Sale Price
Steel Sc		I Etching Pen, overall length is 6 <mark>-1/4"</mark>	\$17.35	\$14.85
	ninum knurled steel tubing body.	iber point which is removable and rep	laceable	
Order Number	Description	Overall Length	List Price	Sale Price
F52-515-005	Pocket Scriber	5.625"	\$4.70	\$2.60
	ty steel blade with fully hardened t on opposite end.	d points. • Chrome finished	with knurled har	ndle
Order Number	Description	Overall Length	List Price	Sale Price
F52-515-025	Point Scriber	8.5"	\$4.70	\$2.60
• Ligt Order Number F52-500-050 F52-500-055	ntweight • Retractable carbide Description Carbide Super Scriber Carbide Refill	tip • Knurled grip • Machined at Overall Length 6.5"		• Pocket clip Sale Price \$26.80
• Ligr	htweight • Retractable carbide Description	tip • Fluted grip • Blue anodized Overall Length	List Price	Pocket clip Sale Price
F52-500-000	Pocket Carbide Scriber	6.0"	\$16.00	\$11.50
F52-515-046	Carbide Refill		6.05	
600335	8	de tip • Knurled grip • Pocket	clip • Mag	netic end cap
Order Number	avy duty • Replaceable carbi Description	Overall Length	List Price	Sale Price
Order Number I F52-500-080 F		Overall Length		
Order Number I F52-500-080 F F52-500-085 G	Description Replaceable Tip Carbide w/mag Carbide Refill	Overall Length netic end cap 5.75"	List Price \$8.60 1.75	Sale Price \$5.75
Order Number I F52-500-080 F F52-500-085 G	Description Replaceable Tip Carbide w/mag	Overall Length netic end cap 5.75"	List Price \$8.60 1.75	Sale Price

ETCHING WARKER FOWIER Tint

42

Wer TOOL-A-THON

Combination Squares


- Blades are chrome plated, fully hardened and tempered, graduated in 8ths, 16ths, 32nds and 64ths.
- Finished in baked blue enamel.
- Square head has level and scriber point.
- Double indexed protractor is graduated 180° in both directions.



Order Number	Description	List Price	Sale Price
F52-373-012	Square Head with 12" blade	\$82.50	\$73.00
F52-386-006	Square and Center Head with 6" blade	11200	50.00
F52-370-012	Square, Protractor and Center Head with 12" blade	165.90	129.80

Tivit

Double Squares



- Double Squares can also be used as parallels.
- Cast heads are available with both 4" and 6" blades (see main catalog).
- · Blades supplied in 4R graduations.
- Supplied in a carton box.

Order Number	Description	List Price	Sale Price
F52-435-000	Double Square, Cast Head with 4" Blade	\$42.00	\$29.00

Steel Squares & Sets

- Made of the finest carbon tool steel, these economy squares have true right angles both inside and outside.
- Beams and blades ground and lapped for straightness and parallelism.
- Hardened blade
- · Beam grooved at inner corner for clearance of burrs and dirt.
- Squareness of blade edge to the working face:
 - 2" & 3" = ±.0006", 4" & 6" = ±.0008", 9" & 12" = ±.0012"

Sets come complete in a "Shop Hardened" molded case!

Blade Size	Beam Size	
2"	1.5"	
3"	2.5"	
4"	3"	
6"	4"	
9"	6"	
12"	8"	



Order Number	Size/Description	List Price	Sale Price
F52-432-444	3 Piece Square Set: 2", 4" & 6" with shop hardened case	\$52.00	\$47.75
F52-432-246	4 Piece Square Set: 2", 3", 4" & 6" with shop hardened case	61.90	53.95
F52-432-469	4 Piece Square Set: 4", 6", 9" & 12" with shop hardened case	103.95	102.75
F52-432-004	4" Square only	18.75	17.00
F52-432-006	6" Square only	20.80	18.25
F52-432-009	9" Square only	41.60	38.50
F52-432-012	12" Square only	70.75	64.50

Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

/inter 2014



Pric

44



45

Portable Roughness Tester


- · Small, compact size
- · 2 selectable parameters: Ra and Rz
- · Large LCD display
- · Meets ISO and DIN standards.

e la

- · N.I.S.T. traceable specimen included.
- · Uses 9 volt battery (aprox. 3000 measurements).
- · Includes fitted case.

The X-Pro Portable Roughness Tester can be used for many applications by selecting from a variety of accessories, including:

- Stand with swivel
- · A variety of probes.
- · RS232 output available.
- · Printer for hard copy output.



X-Pro Portable Roughness Tester

Order Number	Description	List Price	Sale Price
F54-410-500	Portable Surface Roughness Tester .0004" probe	\$1644.50	\$1500.00
F54-410-600	Portable Surface Roughness Tester .0002" probe	1644.50	1500.00

X-Pro Portable Roughness Tester Stand with Swivel

Order Number	Description	List Price
F54-400-896	Stand with Swivel Attatchment	\$396.00

X-Pro Portable Roughness Tester Probes and Accessories

Order Number	Description	Resolution	List Price
F54-400-319	General Purpose Probe	.0004"	\$547.80
F54-400-326	General Purpose Probe	.0002"	547.80
F54-420-321	Small Bore Probe	.0004"	715.00
F54-420-327	Small Bore Probe	.0002"	715.00
F54-420-301	Traverse Chisel Probe	.0004"	715.00
F54-420-302	Parallel Chisel Probe	.0004"	715.00
F54-420-328	Groove Bottom Probe	.0004"	715.00
F54-420-120	AC Adapter Kit		60.50

46

Clinotronic Plus The Fowler/WYLER Clinotronic Plus is an elec- tronic level with unsurpassed versatility. It is economically priced, uses a specially designed microprocessor and the well-proven WYLER inclination sensor.	EW!	Fow
Features: • Range of ±45°, capacity of 0-360°. • Resolution of 0.01° (selectable). • Adjustable base length. • Built-in calibration program. • Uses standard 1.5v AA batteries.	+ clinotronic PLUS +	ler .
 Desired units to be selected by push button. Automatic setting of zero by push button command. Display: use any units common to inclination measurements. Absolute or relative measuring mode select- 		TOOL-A-THON
 able by push button. Seal-tec technology for excellent performance even in difficult environmental conditions. Interface connection RS232 is integrated. FREE Fowler Hat Special purpose cables available. 	RS-232 DIRECT	L-A
Low battery indication. No loss of calibration data by power failure. Price includes fitted case.	The following measuring units may be selected: Deg/Arcmin 00° 00'	白
Technical Specifications:• Measuring range/capacity: $\pm 45^{\circ}/0.360^{\circ}$ • Response time: value available within 5 seconds.• Repeatability: <.01^{\circ}	Arcmin / Arcsec 00° 00° GON / Neugrad (2 Dec) 00.00 gon GON / Neugrad (4 Dec) .0000 gon mm / rel.Basis (2 Dec) 00.00 mm/m mm / rel.Basis (4 Dec) .0000 mm/m Inch / rel.Basis (4 Dec) .0000°/10° artillery per mille A‰ 0000 mm / m (2 Dec) 00.00 mm/m Inch / 10 Inches .0000°/10° Inch / 12 Inches .0000°/12° Milliradian 00.00 mrad (2Dec) Milliradian 0000 mrad Deg (2 Dec) 0.000°	HON

Order Number	Description	List Price	Sale Price
F54-635-601	NEW Clinotronic Plus	\$1875.00	\$1725.00
F54-635-610	Replacement Battery	44.00	

Cross Spirit Level

Features

- The Cross Spirit Level is used for leveling machines & other apparatus.
 Overall length: 3.15" (80mm); width: 2.64" (67mm); thickness: .667" (17.2mm).
 Center to center distance of holes is 1.378" (35mm).
 Sensitivity is .001"/10", 20 seconds (.1mm/m).

- 35mm center to center distance
- · Level is screw-on type.

Order Number	Description	List Price	Sale Price
F52-422-078	NEW Cross Spirit Level	\$639.00	\$550.00

Be sure to use the "F" prefix when ordering Tool-A-Thon specials.

Winter 2014

NEW!





0.02

10u