


## Intelligent Toilet Installation Instruction

### Caution

1. Don't connect power or water before toilet installation finished.
2. Working water pressure is 0.15 – 0.75 MPa.
3. Secure entry temperature is 4 – 35
4. Avoiding bumping the ceramic body. Ceramic is easy cracked.
5. Don't break the anti leakage plug or power line. It may cause fire and electric shock.

### I. Water valve installation


Sign vertical line to locate the sewage and space for the toilet. Install the water valve on the suitable position of the wall.

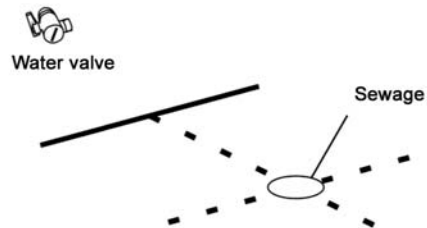

### II. Toilet installation instruction

(Make the floor dry and clean before install the toilet.)


1. Open the seat cover before putting up the toilet. Move the toilet safely by two people.

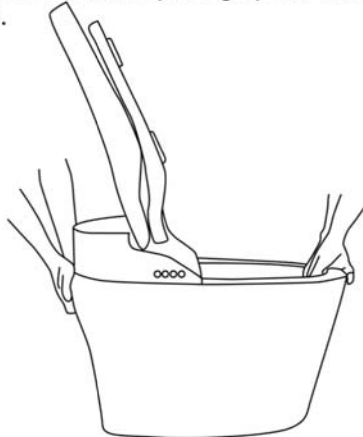


2. Put the wax ring around the toilet drain outlet.



3. Put up the toilet and aim the wax ring to the centre of sewage.  
Put down the toilet.

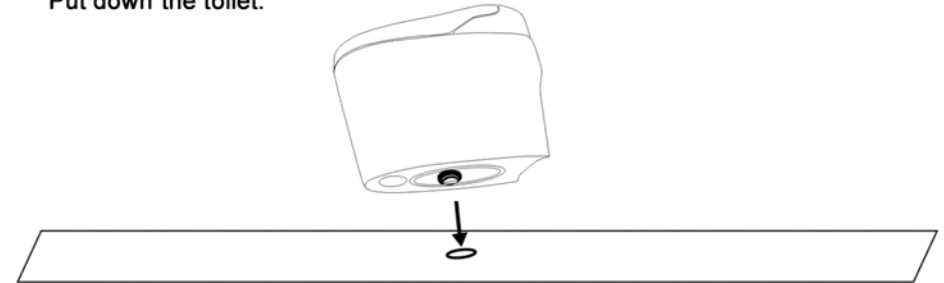

4. Seal the toilet with silicone sealant. Daub it around the base of toilet equally.  
24 hours later, it will be dry. Don't use or move the toilet before the sealant dry.

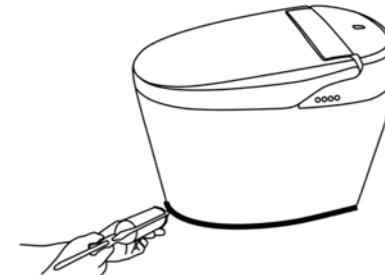

5. Connect the supply line with water valve.

