
Glass door handle

Before installing the glass on the door, the handle must be disassembled.

Part:

- 1. metal handle
- 2. wooden handle
- 3. 4x set screw for fixing handle
- 4. 2x bolts
- 5. 2x cone bushings
- 6. 4x cover caps for handles
- 7. 4x plastic washer
- 8. 2x plastic bushing

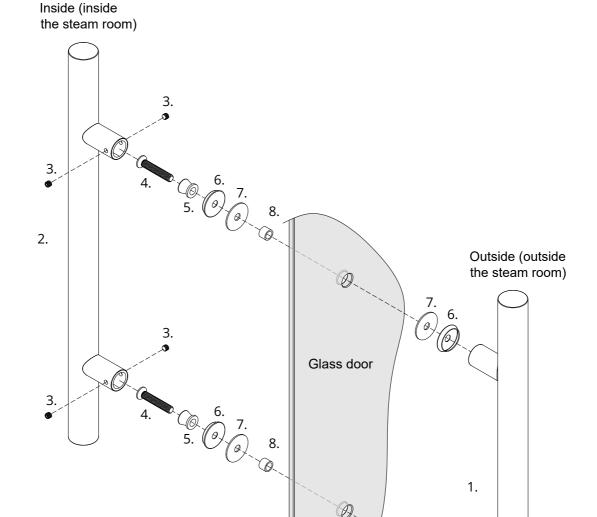

Order of installation

2X (4-5-6 (inside the steam room) - 7(inside the steam room) - 8-G ass door - 7(outside the steam room) - 6(outside the steam room)) - 1-2-3