

HOOK-UP CONNECTION

NON-METERED UNIT

1, 2, 3 & 4way, Interlock Sockets
16A or 32A



ROLEC
Caravan Hook-Ups




Available in 1, 2, 3 and 4way options, this cost effective and hard-wearing hook-up unit is suitable for all caravan and holiday parks. With its IP44 interlock sockets, this hook-up unit ensures a safe and secure electrical connection(s).

Complete with an IP65 weatherproof polycarbonate enclosure, built-in cable terminals and switchgear access flaps with an optional galvanised ground mounting post.

Unit shown: Hook-Up Connection Unit
Non-Metered
4way Interlock Sockets

PRODUCT FEATURES

- IP44 interlock sockets
- Available in 16A or 32A versions
- 18th edition regulations compliant
- Built-in overload and 30mA fault current protection
- IP65 weatherproof polycarbonate enclosure
- Built-in cable terminals
- Switchgear access flap
- Optional galvanised mounting post
- Easy to install & maintain
- IP Rated & UV stabilised
- Fire retardant



Interlock
Sockets



For Touring/Static
Caravans & Camp Sites



IP Rated &
UV Stabilised



Flame
Retardant







Strong
& Durable



CE
Certified

SPECIFICATIONS


PRODUCT OVERVIEW

Product Code	Socket(s)	Output	Fault Protection	Enclosure
LSAA0010i	1 Way Interlock 	1x 16A	1x 16A 30mA RCBO	Small
LSAA0010i-10A		1x 10A*	1x 10A 30mA RCBO	
LSAA0030i		1x 32A	1x 32A 30mA RCBO	
LSAH0040i	2 Way Interlock 	2x 16A	2x 16A 30mA RCBOs	Small
LSAH0040i-6A		2x 6A**	2x 6A 30mA RCBOs	
LSAH0040i-10A		2x 10A*	2x 10A 30mA RCBOs	
LSAH0045i		2x 32A	2x 32A 30mA RCBOs	
LSAH0050i	3 Way Interlock 	3x 16A	3x 16A 30mA RCBOs	Large
LSAH0050i-10A		3x 10A*	3x 10A 30mA RCBOs	
LSAH0060i	4 Way Interlock 	4x 16A	4x 16A 30mA RCBOs	Large
LSAH0060i-10A		4x 10A*	4x 10A 30mA RCBOs	
LSAH0065i		4x 32A	4x 32A 30mA RCBOs	

*Supplied with 16A socket(s) restricted to a 10A output **Supplied with 16A socket(s) restricted to a 6A output

TECHNICAL DATA

Input Voltage	220 to 250 VAC / 50 Hz (Single Phase)
Cable Terminals	3x50mm Tunnel Terminals Fitted as Standard (Others sizes Available on Request)
Earthing	Brass Earth Plate & Earth Terminals
Certifications & Compliances	Enclosure - EN 60670-1, EN 60670-22
	Flame Retardance - IEC 60695-2-11:2014
	Low Voltage Directive (LVD) - 2014/35/EU
	Environmental Protection - IP65 Enclosure, IP44 Socket(s)
	Weather resistance - BS EN 60529:1992+A2:2013
	Socket(s) - BS EN 60309-2:1999+A2:2012
CE	Cable - BS 6004
	RoHS - 2011/65/EU
	REACH - 1907/2006
Dimensions	Small - 221.5mm x 250mm x 142mm (W x H x D) Large - 270mm x 360mm x 152mm (W x H x D) Post Mounting Fixing Points- 130mm x 190mm (W x H)
Materials	Polycarbonate Enclosure
Operating Temperature	-25°C to +60°C
Colour	Grey

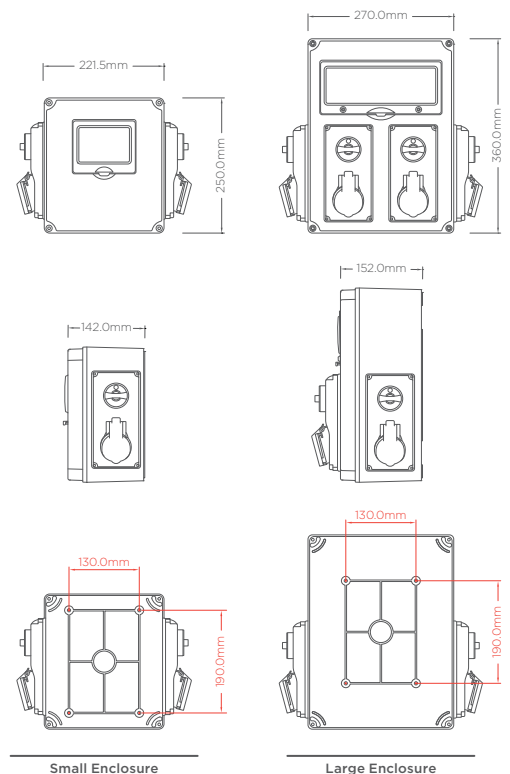

OPTIONS & ACCESSORIES

- Galvanised ground mounting post (product code LSAF0060)
- Photocell kit available to control park lighting
- MID compliant metered & smartcard metered versions available

Images are for marketing purposes only and are not contractual © 2020



Head office contact:
t: +44 (0) 1205 724754
f: +44 (0) 1205 724876
rolec@rolecserv.co.uk

Rolec Services Ltd
Ralphs Lane, Frampton West
Boston, Lincolnshire
UK. PE20 1QU

@RolecCaravan
/Rolec-Services
www.rolecserv.com

LSACHUID-V02-R0 Hook-Up Connection Interlock - Data Sheet