



Cross Cable Set Up Guide



Address

929 Cedar Street
Green Bay, WI, 54301



Contact

920.431.0938



Email

sales@americantent.com



Check us out

www.americantent.com





Greetings from Green Bay, WI

At American Tent, we strive for an internal culture of respect, gratitude, and excellence that is at the heart of all we do. This translates to an external culture of unsurpassed customer service, superior quality, and a willingness to problem solve until our customers are as happy to be working with us as we are to be working with them.

We hope you enjoy your tent. Please be sure to take proper safety measures and carefully follow these set up instructions.

And if you're ever in Titledown, USA, come visit us at American Tent.



Setting Up Your Tent

Please know that your safety is our priority. Before setting up your tent, be sure to confirm with Diggers Hotline (8-1-1) that it is safe to set up your tent in your desired location. Be aware of potential weather conditions, and always evacuate your tent during periods of extraordinarily high winds or lightning.

1. Place the frame parts on the ground.

It's helpful to put them in their approximate locations where they will be when the frame is assembled. This ensures all parts are accounted for at the beginning of your tent set up.

2. Lay out the two cables in an X.

3. Insert the perimeter poles into the fittings.

4. Hook the cables onto the corner fittings.

5. Rotate the turnbuckle to tighten the cables, but don't fully tighten.



6. Roll out your tent top onto dropcloth.


7. Bring tent top over the frame.

8. Loop corner loops onto exterior corner eye-hooks. Use foot as a wedge and pull on last one.




9. Raise one side of tent and insert leg poles.

10. Assemble the mast by attaching both end attachments using pins. Insert top of mast into hole at peak of tent.

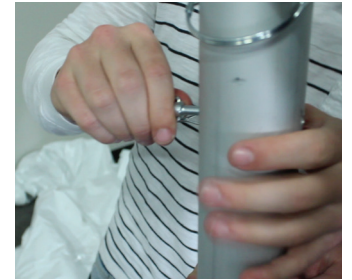

11. Slide mast on top cable using the deeper groove until both grooves pop onto the X of the cables.

12. Secure mast with the bottom pin. Tighten cables.

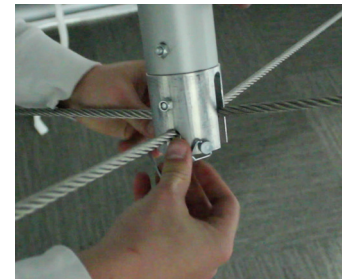

13. Screw on flag.

14. Tugging on the valance to make tight, use the alligator clips to attach tent top to perimeter poles.

15. Slide remaining leg poles onto frame.

16. Insert legs into baseplates.

Continued...



17. Interlace the ropes through the D-rings.

18. Hook the ratcheting pulley to the D-rings and then secure at bottom hook. Pull to tighten.



19. Drive stakes into baseplate holes. until the bottom notch reaches the fitting.



20. Congratulations!
Your cross cable tent is complete.

Like how it looks?

Share photos with us! We love to see our tents in action.



Address

929 Cedar Street
Green Bay, WI, 54301



Contact

920.431.0938



Email

sales@americantent.com



Check us out

www.americantent.com

