


# KYTÖ

## SIZING AND GEOMETRY



	S1	S2	S3	S4
A) Seat tube length	400.0 mm	440.0 mm	480.0 mm	500.0 mm
B) Top tube length	581.1 mm	613.8 mm	645.1 mm	676.4 mm
C) Head tube length	115.0 mm	125.0 mm	130.0 mm	135.0 mm
D) Head tube angle	68.0 degrees	68.0 degrees	68.0 degrees	68.0 degrees
E) Seat tube angle	74.0 degrees	74.0 degrees	74.0 degrees	74.0 degrees
F) Chain stay length	440.0 mm	440.0 mm	440.0 mm	440.0 mm
G) Wheelbase	1122.8 mm	1156.5 mm	1188.4 mm	1220.3 mm
H) Stack	631.6 mm	640.9 mm	645.5 mm	650.1 mm
I) Reach	400 mm	430.0 mm	460.0 mm	490.0 mm
J) Bottom bracket drop	48.0 mm	48.0 mm	48.0 mm	48.0 mm
K) Fork length	Geometry designed with a 120 mm travel and 46 mm offset fork			
Recommended rider height	155-170 cm	165-180 cm	175-190 cm	188-195 cm

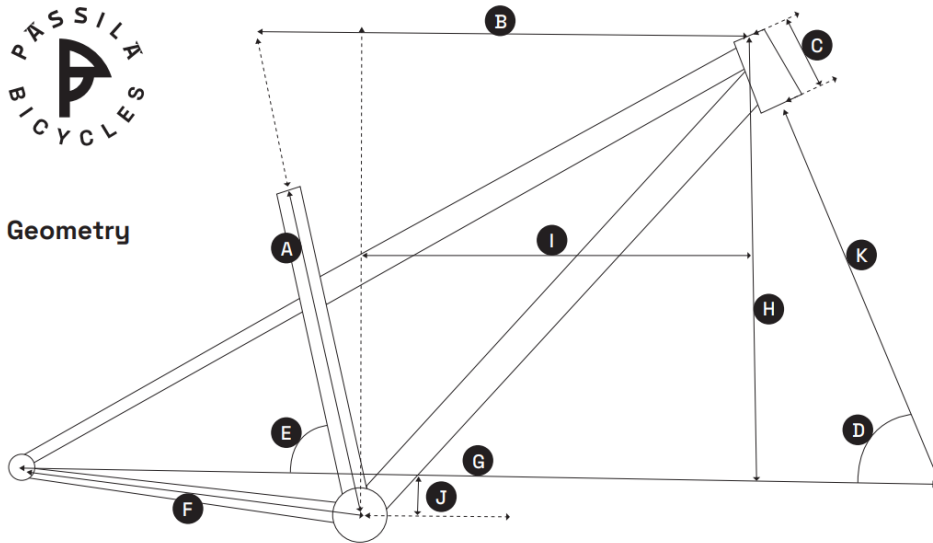

## FRAME DETAILS

Use	Cross country.
Sizes	S1, S2, S3, S4.
Material	Grade 9 titanium alloy.
Color	Hand brushed titanium.
Front suspension	Rigid or 120 mm.
Rear suspension	How much do you squat?
Water bottle mounts	2 mounts.
Headset	44 mm ZS top   56 mm ZS bottom. Headset not included with the frame.
Bottom bracket	73 mm BSA threaded.
Rear brake mount	160 mm Post Mount. Max rotor size 203 mm.
Rear axle	Aluminum through axle included with the frame. 12 mm x 148 mm Boost spacing. 180 mm total length with M12 x 1.5 mm thread.
Seat post diameter	31.6 mm.
Seat clamp	34.9 mm titanium clamp included.
Max seat post insertion	S1 300 mm   S2 340 mm   S3 380 mm   S4 400 mm.
ISCG tabs	None.
Cable routing	External for the rear brake and rear derailleur. Internal for the dropper post.
Max tire size	29 x 2.6" or 27.5 x 2.8.
Max chain ring size	34T single ring.
Frame weight	2.1 kg for size S3.