


SIZING AND GEOMETRY



	S1	S2	S3	S4	S5
A) Seat tube length	450.0 mm	480.0 mm	500.0 mm	530.0 mm	560.0 mm
B) Top tube length	547.6 mm	572.5 mm	597.3 mm	619.7 mm	644.6 mm
C) Head tube length	125.0 mm	145.0 mm	165.0 mm	175.0 mm	195.0 mm
D) Head tube angle	69.5	69.5	69.5	69.5	69.5
	degrees	degrees	degrees	degrees	degrees
E) Seat tube angle	75.5	75.5	75.5	75.5	75.5
	degrees	degrees	degrees	degrees	degrees
F) Chain stay length	435.0 mm	435.0 mm	435.0 mm	435.0 mm	435.0 mm
G) Wheelbase	1063.0 mm	1090.0 mm	1117.0 mm	1140.5 mm	1167.5 mm
H) Stack	570.8 mm	589.5 mm	608.2 mm	617.6 mm	636.3 mm
I) Reach	400 mm	420.0 mm	440.0 mm	460.0 mm	480.0 mm
J) Bottom bracket drop	75.0 mm	75.0 mm	75.0 mm	75.0 mm	75.0 mm
K) Fork length	Geometry designed with a 420 mm axle to crown and 46 mm offset fork.				
Recommended rider height	155-166 cm	165-174 cm	173-182 cm	181-190 cm	189-198 cm

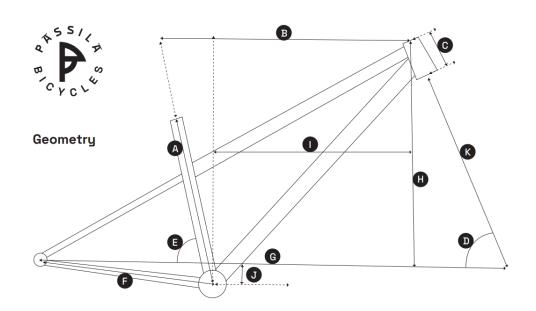

FRAME DETAILS

Use	Gravel grinding		
Sizes	S1, S2, S3, S4, S5		
Wheel size	700c		
Material	Grade 9 titanium alloy.		
Color	Hand brushed titanium.		
Fork axle to crown length	420 mm.		
	3 mounts. 2-bolt accessory mount on the top tube. Two		
Water bottle mounts	Anything Cage mounts on the fork.		
Fender and rear rack	Yes.		
mounts			
	44 mm ZS top 44 mm ZS bottom. Headset not included with		
Headset	the frame.		
Bottom bracket	68 mm BSA threaded.		
Brake mounts	140 mm Flat Mount on rear and front.		
Rear and front axle	Aluminum through axles included with the frame and fork. 12 mm x 142 mm rear and 12 mm x 100 mm front spacing. M12 x 1.5 mm thread.		
Seat post diameter	31.6 mm.		
Seat clamp	34.9 mm titanium clamp included.		
	Internal (inside the down tube and chain stays) for the rear		
Cable routing	brake and rear derailleur. Internal for the dropper post.		
Max tire size	700c x 50 mm.		
Max chain ring size	42T. Single ring only.		
Frame weight	1.96 kg for size S4. Fork weight 0.77 kg.		