


# RUNTU

## SIZING AND GEOMETRY



	S1	S2	S3	S4
A) Seat tube length	400 mm	400.0 mm	420.0 mm	440.0 mm
B) Top tube length	588.7 mm	615.8 mm	635.8 mm	665.8 mm
C) Head tube length	130.0 mm	140.0 mm	140.0 mm	140.0 mm
D) Head tube angle	63.5 degrees	63.5 degrees	63.5 degrees	63.5 degrees
E) Seat tube angle	77.0 degrees	77.0 degrees	77.0 degrees	77.0 degrees
F) Chain stay length	440.0 mm	450.0 mm	450.0 mm	450.0 mm
G) Wheelbase	1234.4 mm	1273.9 mm	1293.9 mm	1323.9 mm
H) Stack	644.3 mm	653.2 mm	653.2 mm	653.2 mm
I) Reach	440.0 mm	465.0 mm	485.0 mm	515.0 mm
J) Bottom bracket drop	30.0 mm	30.0 mm	30.0 mm	30.0 mm
K) Fork length	Geometry designed with a 160 mm travel, 576 mm axle to crown and 44 mm offset fork			

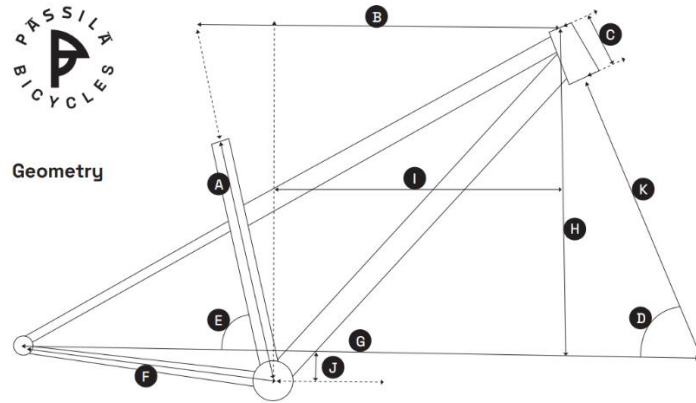

## FRAME DETAILS

Use	Enduro racing.
Wheel size	29" or 27.5"+.
Sizes	S1, S2, S3, S4.
Material	Grade 9 titanium alloy.
Color	Hand brushed titanium.
Front suspension	160 mm or 170 mm.
Rear suspension	Use your knees!
Water bottle mounts	2 mounts.
Headset	44 mm ZS top   56 mm ZS bottom. Headset not included with the frame.
Bottom bracket	73 mm BSA threaded.
Rear brake mount	160 mm Post Mount. Max rotor size 203 mm.
Rear axle	Aluminum through axle included with the frame. 12 mm x 148 mm Boost spacing. 180 mm total length with M12 x 1.5 mm thread.
Seat post diameter	31.6 mm.
Seat clamp	34.9 mm titanium clamp included.
Max seat post insertion	S1 300 mm   S2 300 mm   S3 320 mm   S4 340 mm.
ISCG tabs	ISCG05.
Cable routing	External for the rear brake and rear derailleur. Internal for the dropper post.
Max tire size	29 x 2.6" or 27.5 x 2.8".
Max chain ring size	34T single ring.
Frame weight	2.0 kg for size S2.