

## OCSB Series


### FEATURES

- Fast resolution switching
- 38mm 5 digits LED display
- Rotatable hook
- Idle mode to maximize the battery life
- HOLD function
- Tare In / Tare Out
- Unit switch: kg / lb
- Auto overload alarm at 100%F.S. +9e
- Auto power-off function



### OPTION

- Wireless Scoreboard
- LCD display version, model OCSB4

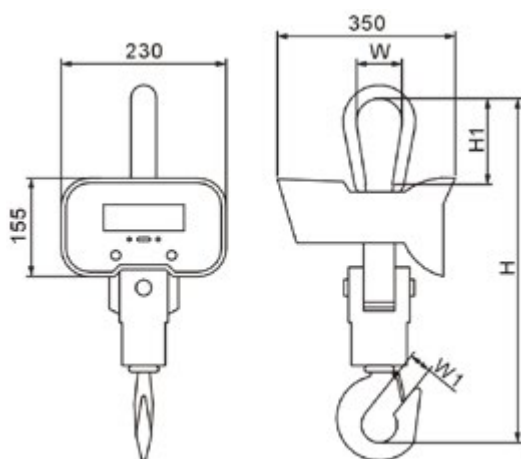

<b>Model</b>	<b>OCSB3</b>
<b>Type</b>	General
<b>Accuracy Class</b>	OIML III
<b>Enclosure</b>	Die-casting aluminum
<b>Display</b>	38mm LED
<b>Capacity Available</b>	2 / 4 / 6 / 10 Kib
<b>Battery Life</b>	100 Hours
<b>High Quality Load Receptor</b>	Alloy Steel
<b>Shackle</b>	H.D. Fixed
<b>Hook</b>	H.D. Rotatable
<b>High Capacity Rechargeable Battery</b>	Yes 6V/10Ah
<b>Infrared Remote Control</b>	Yes

Rated Capacity	Division	H	H1	W	W1	N.W.	G.W.
1t / 2Kib	0.5kg / 1 lb	395mm / 15.55"	100mm / 3.94"	70mm / 2.76"	35mm / 1.38"	12kg / 26.5 lb	13kg / 29.1 lb
2t / 4Kib	1kg / 2 lb	395mm / 15.55"	100mm / 3.94"	70mm / 2.76"	35mm / 1.38"	12kg / 26.5 lb	13kg / 29.1 lb
3t / 6Kib	1kg / 2 lb	395mm / 15.55"	100mm / 3.94"	70mm / 2.76"	35mm / 1.38"	12kg / 26.5 lb	13kg / 29.1 lb
5t / 10Kib	2kg / 5 lb	490mm / 19.29"	115mm / 4.53"	85mm / 3.35"	40mm / 1.57"	17kg / 37.5 lb	19kg / 40.8 lb

\*Dimensions and specifications are subject to change without notice.