


# ASSEMBLY

RESPAWN 900 / S900

PACKAGE CONTENTS

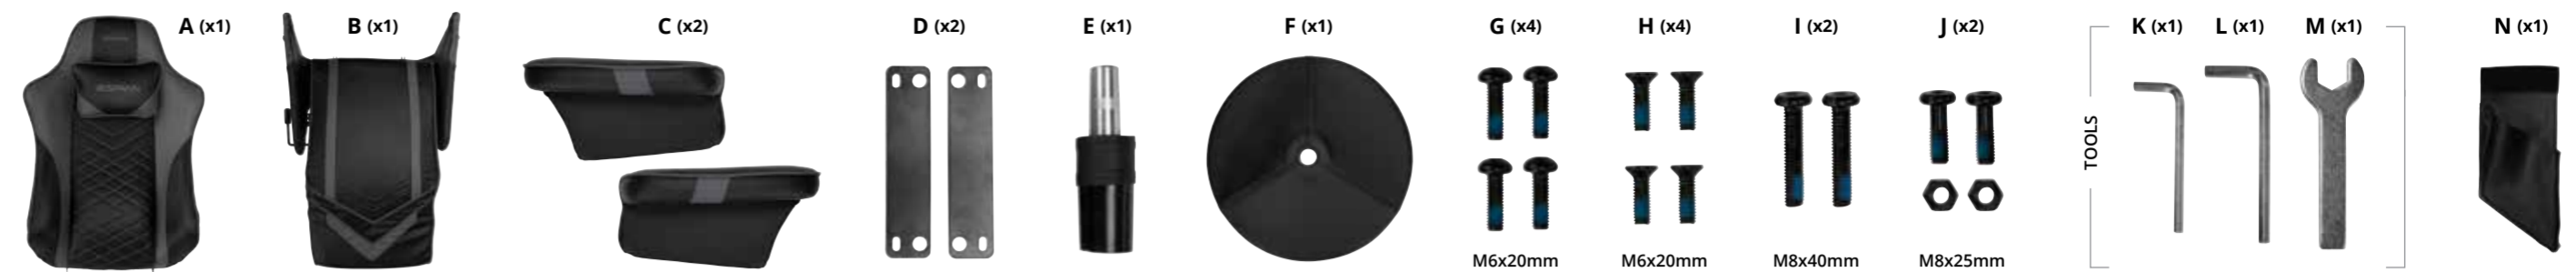

**A**

1. Lay out and identify components on a nearby table or flat surface.
2. Place base (F) on flat surface.
3. Insert gas cylinder (E) into base (F).



**B**

4. Identify footrest assembly (B). Tilt assembly to locate placement hole for gas cylinder to be aligned.
5. Place footrest assembly (B) onto gas cylinder (E).



**C**

6. Make sure footrest assembly is seated correctly onto gas cylinder.



**D**

7. Locate chair back and tilt 45 degrees forward between the footrest assembly.
8. Align screw holes on chair back (A) with side holes on footrest assembly. The screw holes can be seen when zipper is unzipped.



**E**

9. Insert screws (I) through sides and into chair back as pictured. Once both screws are inserted (2-3 revolutions), move to next step. Screws will be tightened completely at end of chair assembly.



**F**

10. Use screw/nut combination (J) to attach chair back assembly on both sides of back as pictured.



**G**

11. Use provided wrench and Allen wrench to fully tighten screw/nut in both locations.

**PRO TIP:** Using a 13mm socket wrench can make this process easier.



**H**

12. Attach metal plates (D) to top of sides using screws (H).



**I**

13. Locate the arms (C), there is a right and a left arm. Armrests slide down between sides and seat. Attach arms to the metal plates with screws (G).



**J**

14. Go back to chair back screws in **Step 9** and tighten completely. Pull zipper down to close access area and tuck in zipper under flap for seamless aesthetic.

**PRO TIP:** When tightening screws, be careful not to pinch zipper under the screw.



**K**

15. Find pouch (N) and affix it underneath left arm using Velcro strip.



**L**

16. Last step is to sit in your new chair to fully secure the gas cylinder to the footrest assembly and make sure chair is fully functional.

**YOU'RE FINISHED, ENJOY!**



# USAGE INFO

RESPAWN 900 / S900

## SAFETY INFORMATION



## GENERAL CARE AND MAINTENANCE

- ✓ Extended exposure to direct sunlight can cause the chair material to crack and color to fade.
- ✓ Keep your pets off of the chair. Their claws and teeth may damage the chair material.
- ✓ Sweat may become an issue as the moisture and oils can damage the chair material. Follow the cleaning guide and wipe the chair clean every so often.
- ✓ Follow care and proper use. Misuse can lead to damage, not just to the chair but to you as well.

## ATTENTION

Make sure all bolts and screws are fully tightened before using chair. Lubricate all moving parts and tighten all bolts/screws every 6 month or whenever needed.

## ⚠WARNING

To ensure proper assembly, follow all steps and use all parts. Failure to follow this warning can result in serious injury to yourself or others.

## CONTROLS



## CLEANING



Use a lint-free microfiber cloth with a mild soap-and-water solution to clean the chair surfaces.



Gently wipe all areas to remove any surface dust.

## VISIT OUR WEBSITE TODAY



SCAN ME!  
USING YOUR CAMERA  
RESPAWNPRODUCTS.COM

SCAN NOW FOR INSTANT WEBSITE ACCESS:



ASSEMBLY  
VIDEO



WARRANTY  
INFORMATION



FUTURE DEALS  
& GIVEAWAYS!