



soundskins®


Sedan Door Kit Instructions

Tools needed for installation:

- Panel/trim tool
- Roller
- Screw driver
- Microfiber cloth
- Acetone or cleaning solution
- Razor blade



1. Start by locating the fastening hardware on the door panel. Take the appropriate screw driver and remove. Once all the screws are removed you can take off the door panel gently using a panel tool, watching that you don't break any of the clips or mounting hardware.

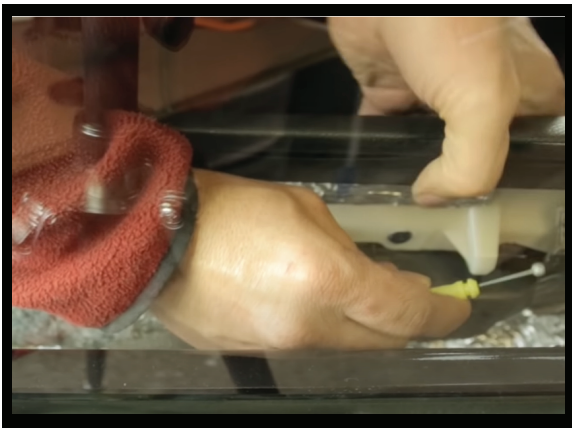

2. Pull the panel away slowly and unplug any electrical connections.



3. Now you are ready to prep the metal surface using a microfiber cloth and Acetone (or other cleaning solution). Wipe away any moisture, oil, debris, etc. Then, let it air dry for an appropriate time. The point is to get the surface clean to ensure material glue contact.



5. Locate the piece of the kit with the label on the back that coincides with the door you're working on. Make sure it lines up and is correct before you pull the white cover paper off. After you confirm the right piece, pull off the white paper and use a roller to apply the material at the top and work your way down. Use a razor blade or household needle to release air. Repeat for all door panels.



6. Now you are ready to place the door panel back on your door. All necessary openings will be available after you have applied the SoundSkins material. Secure your door panels with all screws and enjoy your quiet new ride!

YOU'RE NOW READY TO HIT THE ROAD!

SoundSkins USA
13452 Alondra Blvd, Cerritos, Ca 90703
Phone: 877.211.5597
Email: team@soundskinsglobal.com
www.SoundSkinsGlobal.com