



soundskins®

2014+ Harley Davidson Saddlebag Speaker Lid Kit Installation Instructions


Preparation

Start by protecting the paint by laying a soft cloth on your work space or taping down the lid surface.

Then, remove all of the hardware from the lid such as the latching mechanism, the hinge cover, and the speaker. Before removing the latching mechanism, mark the position in the lid of the latch bridge with a pencil.

Next, thoroughly clean the inside of both lids.

Last, use a sharp razor to cut the kit pieces out of the main sheet.

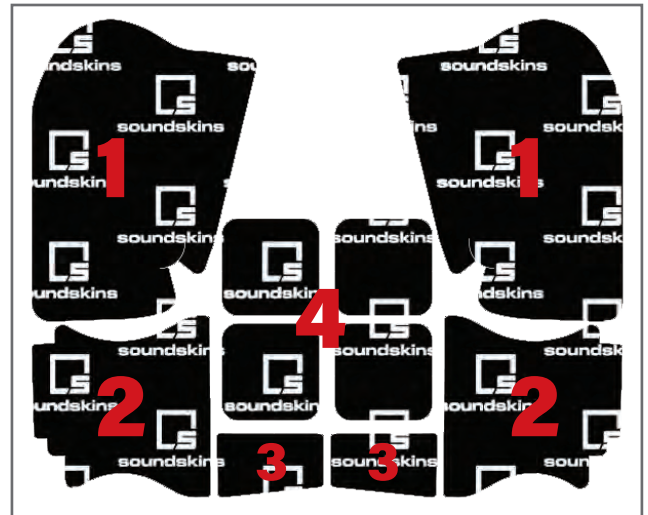

Installation



1. The first panel to go in is one of panel 4. Position this panel directly under the center of the latch mechanism bridge where you made your pencil marks earlier. This panel will keep the latch from rattling against the top of the lid. Then, reinstall the latch mechanism. Reinstall the hinge cover and ensure the lid gasket is put back in place.



2. Next, install panel 1. There are two relief cuts on this piece that allow it to bend where it needs to on the rear and outside edge of the lid. Align this panel along the back edge of the latch mechanism and move on to the rear so everything lines up.



3. Panel 2 covers the bottom of the latch mechanism itself. Ensure you don't get the left and the right side pieces mixed up. Mock it up to ensure correct placement before applying.



4. The final piece, panel 3, will cover the area by the hinge side of the lid. The remaining square pieces (panel 4) are bonus pieces that you can use to sound deaden any other part of your vehicle that you wish.

You're ready to hit the road!



Soundskins USA
13452 Alondra Blvd, Cerritos, Ca 90703
Phone: 562.689.5151
Email: usa@soundskinsglobal.com
www.SoundSkinsGlobal.com