

Residential Range

Bollard Lights

Bollard Light with Sensor

Product Code	LED's	Battery	Solar Panel	IP Rating	Lumens
SLDBL0026-PIR	12 x 0.2w (CW) 1 x 0.2w (WW)	3 x 1.2v 800mAh Ni-MH	0.6w Polycrystalline	44	350
SLDBL0027-PIR	12 x 0.2w (CW) 1 x 0.2w (WW)	3 x 1.2v 1500mAh Ni-MH	1w Polycrystalline	44	350

Features:

- Pyro-electric Infrared Sensor
- Stainless Steel Construction
- Approximately 6-8 hours Operation
- Approximately 1 minute Sensor Run Time
- UV-Stabilised PVC Lens
- Spike & Surface Mount Option with Stainless Steel Trim

1 Year Warranty!

Definitions:

WW = Warm White

CW = Cool White

RGB = Red, Green & Blue

Packaged Fitting Weight & Dimensions

W: 0.9kg




D: 48cm x 15cm x 16cm



SLDBL0026-PIR
(Round Head)



SLDBL0027-PIR
(Square Head)

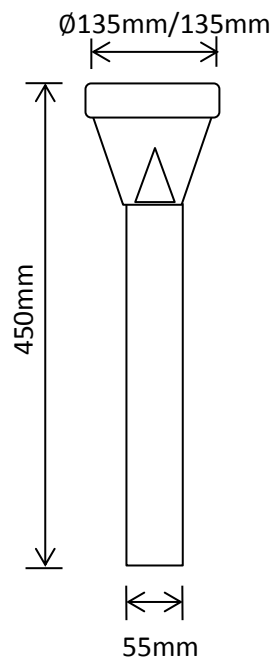

SLDALP-100

Optional 1m
Aluminium
Extension post to
suit Residential
Bollards