



# INSTRUCTION GUIDE

## Residential Strip Light

Model No. SLDSTRIP-WW, SLDSTRIP-RGB

### PACKAGE CONTENTS

- 1 x Light Fitting
- 1 x Solar Panel Head
- 1 x Solar Panel Bracket Pole
- 1 x Ground Mount Spike



### FEATURES

1. Day/Night Sensor
2. Double Sided Tape
3. Anti UV and Waterproof epoxy
4. 8 Hours Charging Time
5. 10-12 hours Working Time



#### SLDSTRIP-WW

- 4 flashing or steady modes to choose from
- 5m cable from solar panel to strip
- Option to charge panel via 5v USB port
- Panel indicator lights;
  - Red** - Charging
  - Green** - Fully Charged

#### SLDSTRIP-RGB

- 8 flashing or steady modes to choose from
- 3m cable from solar panel to strip

### INSTALLATION METHOD

1. Remove contents from packaging

**NOTE:** Before continuing, it is recommended that your solar panel is exposed to direct sunlight (with the button in the "OFF" position) for 2 days prior to installation

**(Please Note: The light is packed and transported with the button in the "OFF" position)**

2. Decide where to install your Solar Panel (where it will receive maximum direct sunlight to charge)
3. Press power button on the solar panel to activate your battery pack "ON" (Press once)
4. Insert Spike into the bottom of the Bracket Pole (As seen in **FIGURE 1**)
5. Slide the Solar Panel into the bracket on top of the pole (As seen In **FIGURE 2**)
6. Press the **MODE** Button to toggle between the pre-set operating modes (As seen in **FIGURE 3**)




FIGURE 1




FIGURE 2

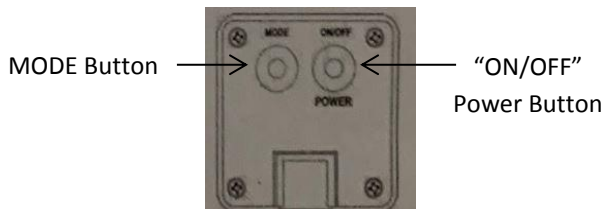


FIGURE 3

### IMPORTANT NOTES

- **Please ensure you place your Solar Panel in a location where it can achieve a minimum of 6HRS DIRECT SUNLIGHT**
- Be aware that on overcast/cloudy days, the solar panel will still charge. However, not as efficiently as a sunny day, so the battery may not reach full capacity. Therefore, your light may turn off earlier than specified.
- It's best not to install the fitting underneath a street light, porch light etc. because this may stop the automatic day-night sensor triggering and result in your lights not turning on

### TROUBLE SHOOTING

Phenomenon	Cause	Inspection Method	Solution
Light won't turn on	Switch hasn't been turned on	Determine what position the switch is in	Turn the switch on
	Battery has run flat	Period of rainy or cloudy weather or installation site doesn't provide enough direct sunlight	1. Charge the light in direct sunlight for 1-2 days then check again 2. Charge light via USB port ( <b>SLDSTRIP-WW</b> )
The light only stays on for a short amount of time	Low Battery	1. Bad installation site for the solar panel 2. Dust or leaves are covering the panel 3. Long period of overcast weather	1. Charge the battery in direct sunlight for 1-2 days with the switch off, then check again 2. Clean the solar panel 3. Charge light via USB port ( <b>SLDSTRIP-WW</b> )
		Battery Failure	1. Access the light and & replace battery 2. Battery has matured