



INSTRUCTION GUIDE

Residential Wall Light

Model No. SLDWL0099A/BLK-WW, SLDWL0099A/SS-WW, SLDWL0099A/SS-CW

PACKAGE CONTENTS

- 1 x Light Fitting
- 1 x Pack of Screws

FEATURES

1. IP65 Waterproof Rating
2. Pyro-electric Infrared Sensor
3. Built in Photo Electric Cell
4. Self-adjusting run time on Sensor
5. 8-10 hours Operation per day
6. Flush Wall Mount Base



IMPORTANT NOTES

- **Please ensure you place your Solar Panel in a location where it can achieve a minimum of 6HRS DIRECT SUNLIGHT**
- Be aware that on overcast/cloudy days, the solar panel will still charge. However, not as efficiently as a sunny day, so the battery may not reach full capacity. Therefore, your light may turn off earlier than specified.
- It's best not to install the fitting underneath a street light, porch light etc. because this may stop the automatic day-night sensor triggering and result in your lights not turning on

INSTALLATION METHOD

1. Remove package contents

NOTE: Before continuing, we recommend you put your light in direct sunlight (with the switch in the "OFF" position) for 2 days before installation

2. Decide where to mount your wall light (where the light will receive maximum direct sunlight throughout the day)

Please refer to FIGURE 1 for the following steps:

Step 1. Make sure your light is switched in the "ON" position (D)

Step 2. Drill a hole in your chosen wall large enough to fit the plastic anchor (C) and insert anchor

Step 3. Insert screw (B) into the anchor, make sure it is in tight but leave 5mm of the screw to project out of the wall

Step 4. Fix the wall light (A) by hooking the keyhole at the back of the light, over the mounted screw and make sure the light is on securely

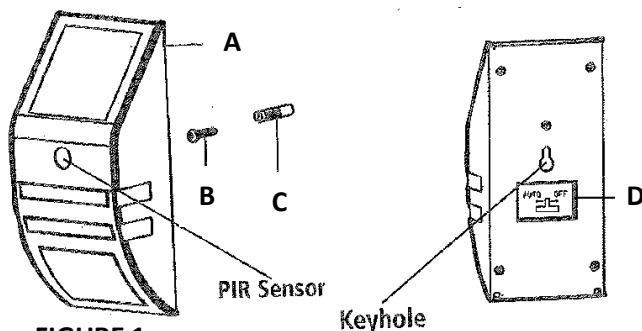


FIGURE 1

TROUBLE SHOOTING

Phenomenon	Cause	Inspection Method	Solution
Light won't turn on	Switch hasn't been turned on	Determine what position the switch is in	Turn the switch on
	Battery has run flat	Period of rainy or cloudy weather or installation site doesn't provide enough direct sunlight	Charge the light in direct sunlight for 1-2 days then check again
The light only stays on for a short amount of time	Low Battery	1. Bad installation site for the solar panel 2. Dust or leaves are covering the panel 3. Long period of overcast weather	1. Charge the battery in direct sunlight for 1-2 days with the switch off, then check again 2. Clean the solar panel
		Battery Failure	1. Access the light and & replace battery 2. Battery has matured