


## Residential Wall Lights – SLDWL02/BLK-WW

### Packaging Contents – SLDWL02/BLK-WW

- |   |               |
|---|---------------|
| 1 | Light Fitting |
| 1 | Fixing Screws |



### Installation Method


1. Remove contents from packaging

**Please Note: It is recommended that you put your light in direct sunlight with the switch in the "Power Off" position for 1–2 days before installation.**

2. Decide where to mount your wall light (where the light will receive maximum direct sunlight throughout the day)

Please refer to **FIGURE 1** for the following;

1. Make sure your light is switched in the "ON" position (D)
2. Drill a hole in your chosen wall large enough to fit the plastic anchor (C) and insert anchor.
3. Insert screw (B) into the anchor, make sure it is in tight but leave 5mm of the screw to project out of the wall.
4. Fix the wall light (A) by hooking the keyhole at the back of the light, over the mounted screw and make sure the light is on securely.

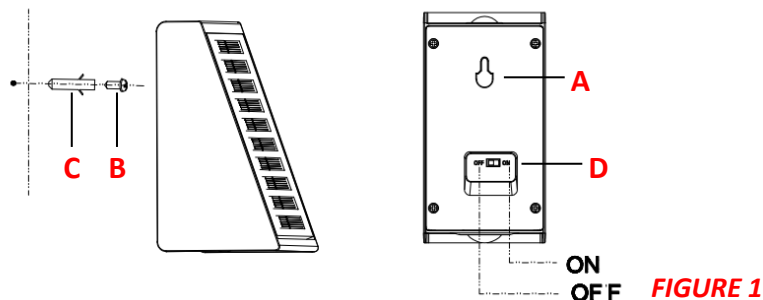

### IMPORTANT NOTES

This solar product is designed for outdoor use only and is powered by a solar panel. In order for this fitting to perform correctly the solar panel needs to be placed in a position that receives direct sunlight with the solar panel facing the sun as much as possible.

Be aware that with overcast/cloudy days, the solar panel will still charge. However, not as efficiently as a sunny day, so the battery may not reach full capacity. Therefore turning off earlier than specified.

It is best not to install these lights underneath a street light, porch light, etc. This may stop the automatic day-night sensor triggering and result in your lights not turning on.

The Solar panel is made with glass components, please take care during the installation process and do not drop, strike or crush the solar panel.

Regular cleaning of the Solar Panel is recommended to prolong the life of your fitting, a soft cloth and warm soapy water is best for cleaning.