# SONICWALL®SHOP

# SonicWall Network Security Appliance (NSA) series

Industry-validated security effectiveness and performance for mid-sized networks

The SonicWall Network Security Appliance (NSA) series provides mid-sized networks, branch offices and distributed enterprises with advanced threat prevention in a high-performance security platform. Combining nextgeneration firewall technology with our patented\* Reassembly-Free Deep Packet Inspection (RFDPI) engine on a multi-core architecture, the NSA series offers the security, performance and control organizations require.

# Superior threat prevention and performance

NSA series next-generation firewalls (NGFWs) integrate advanced security technologies to deliver superior threat prevention. Our patented singlepass RFDPI threat prevention engine examines every byte of every packet, inspecting both inbound and outbound traffic simultaneously. The NSA series leverages on-box capabilities including intrusion prevention, anti-malware and web/URL filtering in addition to cloudbased SonicWall Capture multi-engine sandboxing service to block zero-day threats at the gateway. Unlike other security products that cannot inspect large files for hidden threats, NSA firewalls scan files of any size across all ports and protocols. The security architecture in SonicWall NGFWs has been validated as one of the industry's best for security effectiveness by NSS Labs for five consecutive years.

Further, SonicWall NGFWs provide complete protection by performing full decryption and inspection of TLS/SSL and SSH encrypted connections as well as non-proxyable applications regardless of transport or protocol. The firewall looks deep inside every packet (the header and data) searching for protocol non-compliance, threats, zero-days, intrusions, and even defined criteria to detect and prevent hidden attacks that leverage cryptography, block encrypted malware downloads, cease the spread of infections, and thwart command and control (C&C) communications and data exfiltration. Inclusion and exclusion rules allow total control to customize which traffic is subjected to decryption and inspection based on specific organizational compliance and/or legal requirements.

When organizations activate deep packet inspection functions such as intrusion prevention, anti-virus, antispyware, TLS/SSL decryption/inspection and others on their firewalls, network performance often slows down, sometimes dramatically. NSA series firewalls, however, feature a multi-core hardware architecture that utilizes specialized security microprocessors. Combined with our RFDPI engine, this unique design eliminates the performance degradation networks experience with other firewalls.

In today's security environment, it's not enough to rely on solely on outside parties for threat information. That's why SonicWall formed its own in-house Capture Labs threat research team more than 15 years ago. This dedicated team gathers, analyzes and vets data from over one million sensors in its



# **Benefits:**

Superior threat prevention and performance

- Patented reassembly-free deep packet inspection technology
- On-box and cloud-based threat prevention
- TLS/SSL decryption and inspection
- Industry-validated security effectiveness
- Multi-core hardware architecture
- Dedicated Capture Labs threat research team

Network control and flexibility

- Powerful SonicOS operating system
- Application intelligence and control
- Network segmentation with VLANs
- High-speed wireless security

Easy deployment, setup and ongoing management

- Tightly integrated solution
- Centralized management
- Scalability through multiple hardware platforms
- Low total cost of ownership

Capture Threat Network. SonicWall also participates in industry collaboration efforts and engages with threat research communities to gather and share samples of attacks and vulnerabilities. This shared threat intelligence is used to develop real-time countermeasures that are automatically deployed to our customers' firewalls.

## Network control and flexibility

At the core of the NSA series is SonicOS, SonicWall's feature-rich operating system. SonicOS provides organizations with the network control and flexibility they require through application intelligence and control, real-time visualization, an intrusion prevention system (IPS) featuring sophisticated antievasion technology, high-speed virtual private networking (VPN) and other robust security features.

Using application intelligence and control, network administrators can identify and categorize productive applications from those that are unproductive or potentially dangerous, and control that traffic through powerful application-level policies on both a peruser and a per-group basis (along with schedules and exception lists). Business-

## Secure, High-speed Wireless

critical applications can be prioritized and allocated more bandwidth while non-essential applications are bandwidth-limited. Real-time monitoring and visualization provides a graphical representation of applications, users and bandwidth usage for granular insight into traffic across the network.

For organizations requiring advanced flexibility in their network design, SonicOS offers the tools to segment the network through the use of virtual LANs (VLANs). This enables network administrators to create a virtual LAN interface that allows for network separation into one or more logical groups. Administrators create rules that determine the level of communication with devices on other VLANs.


Built into every NSA series firewall is a wireless access controller that enables organizations to extend the network perimeter securely through the use of wireless technology. Together, SonicWall firewalls and SonicWave 802.11ac Wave 2 wireless access points create a wireless network security solution that combines industry-leading next-generation firewall technology with high-speed wireless for enterprise-class network security and performance across the wireless network.

# Easy deployment, setup and ongoing management

Like all SonicWall firewalls, the NSA series tightly integrates key security, connectivity and flexibility technologies into a single, comprehensive solution. This includes SonicWave wireless access points and the SonicWall WAN Acceleration Appliance (WXA) series, both of which are automatically detected and provisioned by the managing NSA firewall. Consolidating multiple capabilities eliminates the need to purchase and install point products that don't always work well together. This reduces the effort it takes to deploy the solution into the network and configure it, saving both time and money.

Ongoing management and monitoring of network security are handled centrally through the firewall or through the SonicWall Global Management System (GMS), providing network administrators with a single pane of glass from which to manage all aspects of the network. Together, the simplified deployment and setup along with the ease of management enable organizations to lower their total cost of ownership and realize a high return on investment.

Combine an NSA 2650 next-generation firewall with a SonicWall SonicWave 802.11ac Wave 2 wireless access point to create a highspeed wireless network security solution. SonicWall NSA 2650 firewalls and SonicWave access points both feature 2.5 GbE ports that enable multi-gigabit wireless throughput offered in Wave 2 wireless technology. The NSA 2650 scans all wireless traffic coming into and going out of the network using deep packet inspection technology and then removes harmful threats such as malware and intrusions, even over encrypted connections. Additional security and control capabilities such as content filtering, application control and intelligence and Capture Advanced Threat Protection can be run on the wireless network to provide added layers of protection.

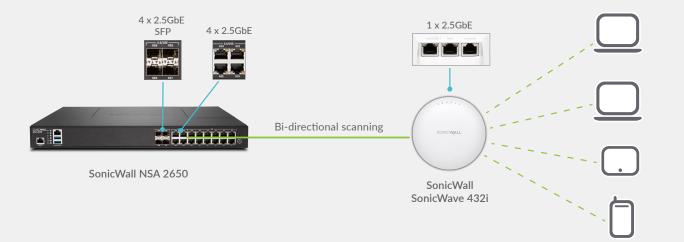

# SONIC WALL'SHOP


# Network Security Appliance 2600

The SonicWall NSA 2600 is designed to address the needs of growing small organizations, branch offices and school campuses.



# Network Security Appliance NSA 2650

The NSA 2650 delivers high-speed threat prevention over thousands of encrypted and even more unencrypted connections to mid-sized organizations and distributed enterprises.

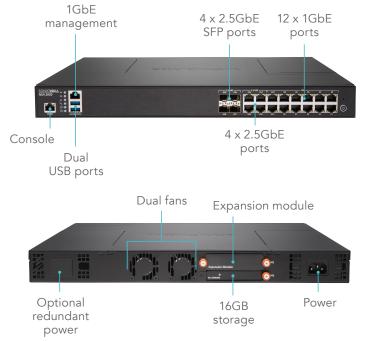

| Firewall                               | NSA 2600    |
|--|-------------|
| Firewall throughput                    | 1.9 Gbps    |
| IPS throughput                         | 700 Mbps    |
| Anti-malware throughput                | 400 Mbps    |
| Full DPI throughput                    | 300 Mbps    |
| IMIX throughput                        | 600 Mbps    |
| Maximum DPI connections                | 250,000     |
| New connections/sec                    | 15,000/sec  |
| Description                            | SKU         |
| NSA 2600 firewall only                 | 01-SSC-3860 |
| NSA 2600 TotalSecure Advanced (1-year) | 01-SSC-1712 |


| Firewall                               | NSA 2650    |
|--|-------------|
| Firewall throughput                    | 3.0 Gbps    |
| IPS throughput                         | 1.4 Gbps    |
| Anti-malware throughput                | 600 Mbps    |
| Full DPI throughput                    | 600 Mbps    |
| IMIX throughput                        | 700 Mbps    |
| Maximum DPI connections                | 500,000     |
| New connections/sec                    | 15,000/sec  |
| Description                            | SKU         |
| NSA 2650 firewall only                 | 01-SSC-1936 |
| NSA 2650 TotalSecure Advanced (1-year) | 01-SSC-1988 |


# Network Security Appliance 3600

The SonicWall NSA 3600 is ideal for branch office and smallto medium-sized corporate environments concerned about throughput capacity and performance.

# Network Security Appliance 4600

The SonicWall NSA 4600 secures growing medium-sized organizations and branch office locations with enterprise-class features and uncompromising performance.

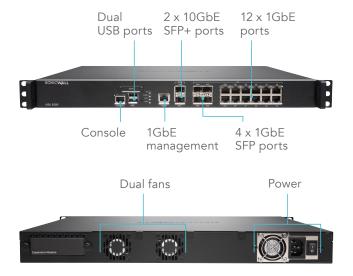

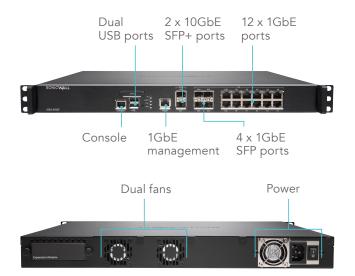

| Firewall                      | NSA 3600    |
|-------------------------------|-------------|
| Firewall throughput           | 3.4 Gbps    |
| IPS throughput                | 1.1 Gbps    |
| Anti-malware throughput       | 600 Mbps    |
| Full DPI throughput           | 500 Mbps    |
| IMIX throughput               | 900 Mbps    |
| Maximum DPI connections       | 375,000     |
| New connections/sec           | 20,000/sec  |
| Description                   | SKU         |
| Firewall only                 | 01-SSC-3850 |
| TotalSecure Advanced (1-year) | 01-SSC-1713 |


| Firewall                      | NSA 4600    |
|-------------------------------|-------------|
| Firewall throughput           | 6.0 Gbps    |
| IPS throughput                | 2.0 Gbps    |
| Anti-malware throughput       | 1.1 Gbps    |
| Full DPI throughput           | 800 Mbps    |
| IMIX throughput               | 1.6 Gbps    |
| Maximum DPI connections       | 1,000,000   |
| New connections/sec           | 40,000/sec  |
| Description                   | SKU         |
| Firewall only                 | 01-SSC-3840 |
| TotalSecure Advanced (1-year) | 01-SSC-1714 |


# Network Security Appliance 5600

The SonicWall NSA 5600 is ideal for distributed, branch office and corporate environments needing significant throughput.

# Network Security Appliance 6600

The SonicWall NSA 6600 is ideal for large distributed and corporate central site environments requiring high throughput capacity and performance.

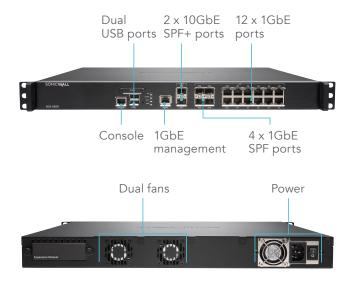

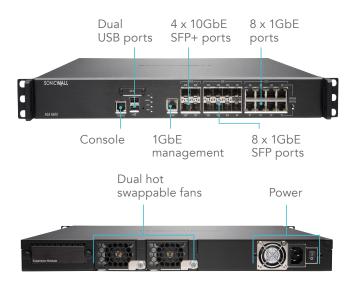

| Firewall                               | NSA 5600    |
|--|-------------|
| Firewall throughput                    | 9.0 Gbps    |
| IPS throughput                         | 3.0 Gbps    |
| Anti-malware throughput                | 1.7 Gbps    |
| Full DPI throughput                    | 1.6 Gbps    |
| IMIX throughput                        | 2.4 Gbps    |
| Maximum DPI connections                | 1,000,000   |
| New connections/sec                    | 60,000/sec  |
| Description                            | SKU         |
| NSA 5600 firewall only                 | 01-SSC-3830 |
| NSA 5600 TotalSecure Advanced (1-year) | 01-SSC-1715 |


| Firewall                               | NSA 6600    |
|--|-------------|
| Firewall throughput                    | 12.0 Gbps   |
| IPS throughput                         | 4.5 Gbps    |
| Anti-malware throughput                | 3.0 Gbps    |
| Full DPI throughput                    | 3.0 Gbps    |
| IMIX throughput                        | 3.5 Gbps    |
| Maximum DPI connections                | 1,000,000   |
| New connections/sec                    | 90,000/sec  |
| Description                            | SKU         |
| NSA 6600 firewall only                 | 01-SSC-3820 |
| NSA 6600 TotalSecure Advanced (1-year) | 01-SSC-1716 |

# Reassembly-Free Deep Packet Inspection engine

The SonicWall Reassembly-Free Deep Packet Inspection (RFDPI) is a singlepass, low latency inspection system that performs stream-based, bi-directional traffic analysis at high speed without proxying or buffering to effectively uncover intrusion attempts and malware downloads while identifying application traffic regardless of port and protocol. This proprietary engine relies on streaming traffic payload inspection to detect threats at Layers 3-7, and takes network streams through extensive and repeated normalization and decryption in order to neutralize advanced evasion techniques that seek to confuse detection engines and sneak malicious code into the network.


Once a packet undergoes the necessary pre-processing, including SSL decryption, it is analyzed against a single, proprietary memory representation of three signature databases: intrusion attacks, malware and applications. The connection state is then advanced to represent the position of the stream relative to these databases until it encounters a state of attack, or other "match" event, at which point a pre-set action is taken.

In most cases, the connection is terminated and proper logging and notification events are created. However, the engine can also be configured for inspection only or, in case of application detection, to provide Layer 7 bandwidth management services for the remainder of the application stream as soon as the application is identified.

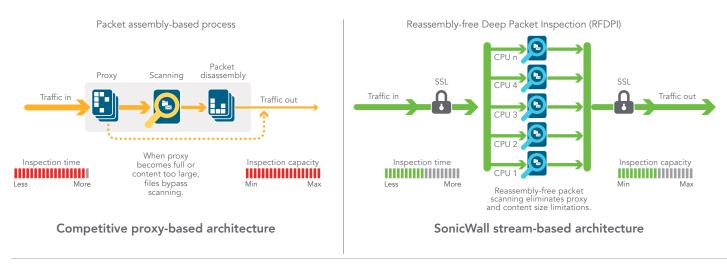

# Flexible, customizable deployment options – NSA series at-a-glance

Every SonicWall NSA firewall utilizes a breakthrough, multi-core hardware design and RFDPI for internal and external network protection without compromising network performance. NSA series NGFWs combine high-speed intrusion prevention, file and content inspection, and powerful application intelligence and control with an extensive array of advanced networking and flexible configuration features. The NSA series offers an affordable platform that is easy to deploy and manage in a wide variety of large, branch office and distributed network environments.

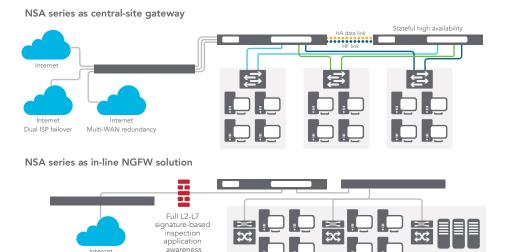

User zone

# SONICWALL'SHOP

Administrative

Servers

# **Capture Labs**


The dedicated, in-house SonicWall Capture Labs threat research team researches and develops countermeasures to deploy to customer firewalls for up-to-date protection. The team gathers data on potential threats from several sources including our awardwinning network sandboxing service, Capture Advanced Threat Protection, as well as more than 1 million SonicWall sensors located around the globe that monitor traffic for emerging threats. It is analyzed via machine learning using SonicWall's Deep Learning Algorithms to extract the DNA from the code to see if it is related to any known forms of malicious code.

SonicWall NGFW customers benefit from continuously updated threat protection around the clock. New updates take effect immediately without reboots or interruptions. The signatures resident on the appliances are designed to protect against wide classes of attacks, covering tens of thousands of individual threats with a single signature.


# Advanced threat protection

SonicWall Capture Advanced Threat Protection Service is a cloud-based multi-engine sandbox that extends firewall threat protection to detect and prevent zero-day threats. Suspicious files are sent to the cloud for analysis with the option to hold them at the gateway until a verdict is determined. The multi-engine sandbox platform, which includes virtualized sandboxing, full system emulation and hypervisor level analysis technology, executes suspicious code and analyzes behavior. When a file is identified as malicious, a hash is immediately created within Capture and later a signature is sent to firewalls to prevent follow-on attacks.

The service analyzes a broad range of operating systems and file types, including executable programs, DLL, PDFs, MS Office documents, archives, JAR and APK. In addition to the countermeasures on the appliance, NSA appliances also have access to SonicWall CloudAV, which extends the onboard signature intelligence with over 20 million signatures. This CloudAV database is accessed by the firewall via a proprietary, light-weight protocol to augment the inspection done on the appliance. With Capture Advanced Threat Protection, a cloud-based multi-engine sandbox, organizations can examine suspicious files and code in an isolated environment to stop advanced threats such as zeroday attacks.

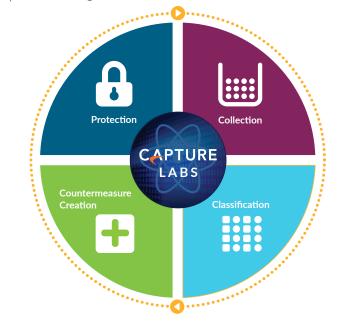

Capture provides an at-a-glance threat analysis dashboard and reports, which detail the analysis results for files sent to the service, including source, destination and a summary plus details of malware action once detonated.

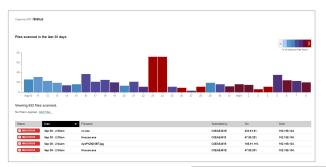




# SONICWALL'SHOP

## Global management and reporting

For highly regulated organizations wanting to achieve a fully coordinated security governance, compliance and risk management strategy, SonicWall Global Management System (GMS®) provides administrators a unified, secure and extensible platform to manage SonicWall firewalls, wireless access points and Dell X-Series switches through a correlated and auditable workstream process. GMS enables enterprises to easily consolidate the management of security appliances, reduce administrative and troubleshooting complexities, and govern all operational aspects of the security infrastructure, including centralized policy management and enforcement; real-time event monitoring; user activities; application identifications; flow analytics and forensics; compliance and audit reporting; and more. GMS also meets the firewall's change management requirements of enterprises through a workflow automation feature. With GMS workflow automation, all enterprises will gain agility and confidence in deploying the right firewall policies, at the right time and in conformance to compliance regulations. Available in software, cloud and virtual appliance options, GMS provides a coherent way to manage network security by business processes and service levels, dramatically simplifying lifecycle management of your overall security environments compared to managing on a device-by-device basis.

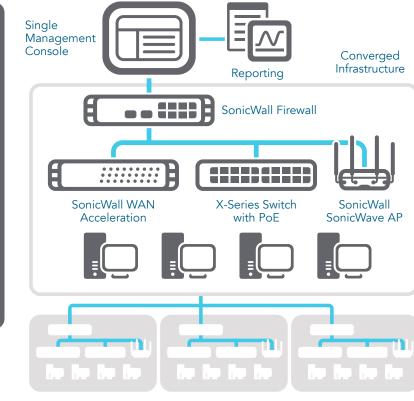

# SonicWall GMS Secure Compliance Enforcement

- Centralized management
- Error-free policy management
- Strong access control

**Benefits** 

- Comprehensive audit trails
- PCI, HIPAA, SOX report templates
- Lower operating costs

Port Expansion Scalability



# Features

| RFDPI engine                                      |  |
|---|--|
| Feature   | Description  |
| Reassembly-Free Deep Packet<br>Inspection (RFDPI) | This high-performance, proprietary and patented inspection engine performs stream-based, bi-directional traffic analysis, without proxying or buffering, to uncover intrusion attempts and malware and to identify application traffic regardless of port.             |
| Bi-directional inspection                         | Scans for threats in both inbound and outbound traffic simultaneously to ensure that the network is not used to distribute malware and does not become a launch platform for attacks in case an infected machine is brought inside.                                    |
| Stream-based inspection                           | Proxy-less and non-buffering inspection technology provides ultra-low latency performance for DPI of millions of simultaneous network streams without introducing file and stream size limitations, and can be applied on common protocols as well as raw TCP streams. |
| Highly parallel and scalable                      | The unique design of the RFDPI engine works with the multi-core architecture to provide high DPI throughput and extremely high new session establishment rates to deal with traffic spikes in demanding networks.  |
| Single-pass inspection                            | A single-pass DPI architecture simultaneously scans for malware, intrusions and application identification, drastically reducing DPI latency and ensuring that all threat information is correlated in a single architecture.  |

| Firewall and networking                             |   |
|---|---|
| Feature   | Description   |
| Threat API  | All the firewall to receive and leverage any and all proprietary, original equipment manufacturer and third-party intelligence feeds to combat advanced threats such as zero-day, malicious insider, compromised credentials, ransomware and advanced persistent threats.         |
| Stateful packet inspection                          | All network traffic is inspected, analyzed and brought into compliance with firewall access policies.   |
| High availability/clustering                        | The NSA series supports Active/Passive (A/P) with state synchronization, Active/Active (A/A) DPI and Active/Active clustering high availability modes. Active/Active DPI offloads the deep packet inspection load to cores on the passive appliance to boost throughput.          |
| DDoS/DoS attack protection                          | SYN flood protection provides a defense against DOS attacks using both Layer 3 SYN proxy and Layer 2 SYN blacklisting technologies. Additionally, it protects against DOS/DDoS through UDP/ICMP flood protection and connection rate limiting.                                    |
| IPv6 support  | Internet Protocol version 6 (IPv6) is in its early stages to replace IPv4. With SonicOS, the hardware will support filtering and wire mode implementations.   |
| Flexible deployment options                         | The NSA Series can be deployed in traditional NAT, Layer 2 bridge, wire and network tap modes.  |
| WAN load balancing                                  | Load-balances multiple WAN interfaces using Round Robin, Spillover or Percentage methods. Policy-based routing<br>Creates routes based on protocol to direct traffic to a preferred WAN connection with the ability to fail back to a<br>secondary WAN in the event of an outage. |
| Advanced quality of service (QoS)                   | Guarantees critical communications with 802.1p, DSCP tagging, and remapping of VoIP traffic on the network.   |
| H.323 gatekeeper and SIP proxy support              | Blocks spam calls by requiring that all incoming calls are authorized and authenticated by H.323 gatekeeper or SIP proxy.   |
| Single and cascaded Dell X-Series switch management | Manage security settings of additional ports, including Portshield, HA, POE and POE+, under a single pane of glass using the firewall management dashboard for Dell's X-Series network switch.  |
| Biometric authentication                            | Supports mobile device authentication such as fingerprint recognition that cannot be easily duplicated or shared to securely authenticate the user identity for network access.   |
| Open authentication and social login                | Enable guest users to use their credentials from social networking services such as Facebook, Twitter, or Google+ to sign in and access the Internet and other guest services through a host's wireless, LAN or DMZ zones using pass-through authentication.                      |

| Management and reporting                 |  |  |
|--|--|--|
| Feature                                  | Description  |  |
| Global Management System (GMS)           | SonicWall GMS monitors, configures and reports on multiple SonicWall appliances through a single management console with an intuitive interface, reducing management costs and complexity.   |  |
| Powerful single device management        | An intuitive web-based interface allows quick and convenient configuration, in addition to a comprehensive command-line interface and support for SNMPv2/3.  |  |
| IPFIX/NetFlow application flow reporting | Exports application traffic analytics and usage data through IPFIX or NetFlow protocols for real-time and historical monitoring and reporting with tools such as SonicWall Scrutinizer or other tools that support IPFIX and NetFlow with extensions.          |  |
| Virtual private networking (VPN)         |  |  |
| Feature                                  | Description  |  |
| Auto-provision VPN                       | Simplifies and reduces complex distributed firewall deployment down to a trivial effort by automating the initial site-<br>to-site VPN gateway provisioning between SonicWall firewalls while security and connectivity occurs instantly and<br>automatically. |  |
| IPSec VPN for site-to-site connectivity  | High-performance IPSec VPN allows the NSA Series to act as a VPN concentrator for thousands of other large sites, branch offices or home offices.  |  |
| SSL VPN or IPSec client remote access    | Utilizes clientless SSL VPN technology or an easy-to-manage IPSec client for easy access to email, files, computers, intranet sites and applications from a variety of platforms.  |  |

| Redundant VPN gateway                | When using multiple WANs, a primary and secondary VPN can be configured to allow seamless, automatic failover and failback of all VPN sessions.   |
|--------------------------------------|---|
| Route-based VPN                      | The ability to perform dynamic routing over VPN links ensures continuous uptime in the event of a temporary VPN tunnel failure, by seamlessly re-routing traffic between endpoints through alternate routes.  |
|                                      | Content/context awareness   |
| Feature                              | Description   |
| User activity tracking               | User identification and activity are made available through seamless AD/LDAP/Citrix1/Terminal Services1 SSO integration combined with extensive information obtained through DPI.   |
| GeoIP country traffic identification | Identifies and controls network traffic going to or coming from specific countries to either protect against attacks from known or suspected origins of threat activity, or to investigate suspicious traffic originating from the network. Ability to create custom country and Botnet lists to override an incorrect country or Botnet tag associated with an IP address. Eliminates unwanted filtering of IP addresses due to misclassification. |
| Regular expression DPI filtering     | Prevents data leakage by identifying and controlling content crossing the network through regular expression matching. Provides the ability to create custom country and Botnet lists to override an incorrect country or Botnet tag associated with an IP address.   |

# Breach prevention subscription services

| Capture advanced threat protection |  |
|------------------------------------|--|
| Feature                            | Description  |
| Multi-engine sandboxing            | The multi-engine sandbox platform, which includes virtualized sandboxing, full system emulation, and hypervisor level analysis technology, executes suspicious code and analyzes behavior, providing comprehensive visibility to malicious activity. |
| Block until verdict                | To prevent potentially malicious files from entering the network, files sent to the cloud for analysis can be held at the gateway until a verdict is determined.   |
| Broad file type and size analysis  | Supports analysis of a broad range of file types, including executable programs (PE), DLL, PDFs, MS Office documents, archives, JAR, and APK plus multiple operating systems including Windows, Android, Mac OS X and multi-browser environments.    |
| Rapid deployment of signatures     | When a file is identified as malicious, a signature is immediately deployed to firewalls with SonicWALL Capture subscriptions and Gateway Anti-Virus and IPS signature databases and the URL, IP and domain reputation databases within 48 hours.    |

| Encrypted threat prevention                                |  |
|--|--|
| Feature  | Description  |
| SSL/TLS decryption and inspection                          | Decrypts and inspects SSL /TLS encrypted traffic on the fly, without proxying, for malware, intrusions and data leakage, and applies application, URL and content control policies in order to protect against threats hidden in SSL encrypted traffic Included with security subscriptions for all NSA series models. |
| SSH inspection   | Deep packet inspection of SSH (DPI-SSH) decrypts and inspect data traversing over SSH tunnel to prevent attacks that leverage SSH.   |
|  | Intrusion prevention   |
| Feature  | Description  |
| Countermeasure-based protection                            | Tightly integrated intrusion prevention system (IPS) leverages signatures and other countermeasures to scan packet payloads for vulnerabilities and exploits, covering a broad spectrum of attacks and vulnerabilities.  |
| Automatic signature updates                                | The SonicWall Threat Research Team continuously researches and deploys updates to an extensive list of IPS countermeasures that covers more than 50 attack categories. The new updates take immediate effect without any reboot or service interruption required.  |
| Intra-zone IPS protection                                  | Bolsters internal security by segmenting the network into multiple security zones with intrusion prevention, preventing threats from propagating across the zone boundaries.   |
| Botnet command and control (CnC)<br>detection and blocking | Identifies and blocks command and control traffic originating from bots on the local network to IPs and domains that are identified as propagating malware or are known CnC points.  |
| Protocol abuse/anomaly                                     | Identifies and blocks attacks that abuse protocols in an attempt to sneak past the IPS.  |
| Zero-day protection  | Protects the network against zero-day attacks with constant updates against the latest exploit methods and techniques that cover thousands of individual exploits.   |
| Anti-evasion technology                                    | Extensive stream normalization, decoding and other techniques ensure that threats do not enter the network undetected by utilizing evasion techniques in Layers 2-7.   |
|  | Threat prevention  |
| Feature  | Description  |
| Gateway anti-malware                                       | The RFDPI engine scans all inbound, outbound and intra-zone traffic for viruses, Trojans, key loggers and other malware in files of unlimited length and size across all ports and TCP streams.  |
| CloudAV malware protection                                 | A continuously updated database of over 20 million threat signatures resides in the SonicWall cloud servers and is referenced to augment the capabilities of the onboard signature database, providing RFDPI with extensive coverage of threats.   |

| Around-the-clock security updates | New threat updates are automatically pushed to firewalls in the field with active security services, and take effect immediately without reboots or interruptions.  |  |  |  |  |
|-----------------------------------|---|--|--|--|--|
| Bi-directional raw TCP inspection | The RFDPI engine is capable of scanning raw TCP streams on any port bi-directionally preventing attacks that they to sneak by outdated security systems that focus on securing a few well-known ports.  |  |  |  |  |
| Extensive protocol support        | Identifies common protocols such as HTTP/S, FTP, SMTP, SMBv1/v2 and others, which do not send data in raw TCP, a<br>decodes payloads for malware inspection, even if they do not run on standard, well-known ports.                                     |  |  |  |  |
|                                   | Application intelligence and control  |  |  |  |  |
| Feature                           | Description   |  |  |  |  |
| Application control               | Control applications, or individual application features, that are identified by the RFDPI engine against a continuously expanding database of over thousands of application signatures, to increase network security and enhance network productivity. |  |  |  |  |
| Custom application identification | Control custom applications by creating signatures based on specific parameters or patterns unique to an application in its network communications, in order to gain further control over the network.  |  |  |  |  |
| Application bandwidth management  | Granularly allocate and regulate available bandwidth for critical applications or application categories while inhibiting nonessential application traffic.   |  |  |  |  |
| Granular control                  | Control applications, or specific components of an application, based on schedules, user groups, exclusion lists and a range of actions with full SSO user identification through LDAP/AD/Terminal Services/Citrix integration.                         |  |  |  |  |

| Content filtering                            |  |  |  |  |  |
|--|--|--|--|--|--|
| Feature                                      | Description  |  |  |  |  |
| Inside/outside content filtering             | Enforce acceptable use policies and block access to websites containing information or images that are objectional unproductive with Content Filtering Service.  |  |  |  |  |
| Enforced content filtering client            | Extend policy enforcement to block internet content for Windows, Mac OS, Android and Chrome devices located out the firewall perimeter.  |  |  |  |  |
| Granular controls                            | Block content using the predefined categories or any combination of categories. Filtering can be scheduled by time day, such as during school or business hours, and applied to individual users or groups.                            |  |  |  |  |
| Web caching                                  | URL ratings are cached locally on the SonicWall firewall so that the response time for subsequent access to frequently visited sites is only a fraction of a second.   |  |  |  |  |
|  | Enforced anti-virus and anti-spyware   |  |  |  |  |
| Feature                                      | Description  |  |  |  |  |
| Multi-layered protection                     | Utilize the firewall capabilities as the first layer of defense at the perimeter, coupled with endpoint protection to block, viruses entering network through laptops, thumb drives and other unprotected systems.                     |  |  |  |  |
| Automated enforcement option                 | Ensure every computer accessing the network has the most recent version of anti-virus and anti-spyware signatures installed and active, eliminating the costs commonly associated with desktop anti-virus and anti-spyware management. |  |  |  |  |
| Automated deployment and installation option | Machine-by-machine deployment and installation of anti-virus and anti-spyware clients is automatic across the network, minimizing administrative overhead.   |  |  |  |  |
| Always on, automatic virus protection        | Frequent anti-virus and anti-spyware updates are delivered transparently to all desktops and file servers to improve end user productivity and decrease security management.   |  |  |  |  |
| Spyware protection                           | Powerful spyware protection scans and blocks the installation of a comprehensive array of spyware programs on desktops and laptops before they transmit confidential data, providing greater desktop security and performance.         |  |  |  |  |



# SonicOS feature summary

### Firewall

- Stateful packet inspection
- Reassembly-Free Deep Packet Inspection
- DDoS attack protection (UDP/ICMP/SYN flood)
- IPv4/IPv6 support
- Biometric authentication for remote access
- DNS proxy
- Threat API

## SSL/SSH decryption and inspection<sup>1</sup>

- Deep packet inspection for TLS/SSL/SSH
- Inclusion/exclusion of objects, groups or hostnames
- SSL Control

## Capture advanced threat protection<sup>1</sup>

- Cloud-based multi-engine analysis
- Virtualized sandboxing
- Hypervisor level analysis
- Full system emulation
- Broad file type examination
- Automated and manual submission
- Real-time threat intelligence updates
- Auto-block capability

## Intrusion prevention<sup>1</sup>

- Signature-based scanning
- Automatic signature updates
- Bidirectional inspection
- Granular IPS rule capability
- GeoIP enforcement
- Botnet filtering with dynamic list
- Regular expression matching

## Anti-malware<sup>1</sup>

- Stream-based malware scanning
- Gateway anti-virus
- Gateway anti-spyware
- Bi-directional inspection
- No file size limitation
- Cloud malware database

## Application identification<sup>1</sup>

- Application control
- Application traffic visualization

<sup>1</sup>Requires added subscription.

• Application component blocking

• Data leakage prevention

User activity tracking (SSO)

**IPFIX** 

database

• URL filtering

VPN

Web content filtering<sup>1</sup>

Keyword blocking

rating categories

Auto-provision VPN

Kindle Fire

Networking

IPv6

PortShield

Jumbo frames

Path MTU discovery

Enhanced logging

• VLAN trunking

Port mirroring

• Layer-2 QoS

Port security

ECMP)

• DHCP server

NAT

Anti-proxy technology

• Bandwidth manage CFS

Content Filtering Client

Redundant VPN gateway

Mobile Connect for iOS, Mac OS

X, Windows, Chrome, Android and

• Route-based VPN (OSPF, RIP, BGP)

• RSTP (Rapid Spanning Tree protocol)

Dynamic routing (RIP/OSPF/BGP)

Policy-based routing (ToS/metric and

• SonicWall wireless controller

Bandwidth management

• Application bandwidth management • Custom application signature creation

Application reporting over NetFlow/

Comprehensive application signature

• Unified policy model with app control

IPSec VPN for site-to-site connectivity

• SSL VPN and IPSec client remote access

• Port redundancy

Link aggregation (static and dynamic)

- A/A clustering
- Inbound/outbound load balancing
- L2 bridge, wire/virtual wire mode, tap mode
- - Common Access Card (CAC) support

### Wireless

- MU-MIMO
- Floor plan view
- Topology view
- Band steering
- Beamforming
- AirTime fairness
- MiFi extender
- Guest cyclic quota

- Granular QoS control
- Bandwidth management
- DPI for VoIP traffic
- H.323 gatekeeper and SIP proxy support

### Management and monitoring

- Web GUI
- Command line interface (CLI)
- SNMPv2/v3
- Centralized management and reporting
- Logging
- Netflow/IPFix exporting
- Cloud-based configuration backup
- BlueCoat Security Analytics Platform
- Application and bandwidth visualization
- IPv4 and IPv6 Management
- Dell X-Series switch management including cascaded switches

- A/P high availability with state sync

  - 3G/4G WAN failover
    - Asymmetric routing

## VolP

# NSA series system specifications

| Firewall general   | NSA 2600   | NSA 2650   | NSA 3600   | NSA 4600  | NSA 5600  | NSA 6600  |  |
|--|--|--|--|---|---|---|--|
| Operating system   |  |  | 1  | OS 6.5  | 4.2   | <u>.</u> .  |  |
| Security processing cores  | 4  | 4  | 6  | 8   | 10  | 24  |  |
|  | 0.4.015  | 4 x 2.5-GbE SFP,   | 2 x 10-GbE SFP+,                                       | 2 x 10-GbE SFP+,  | 2 x 10-GbE SFP+,                                  | 4 x 10-GbE SFP+,                                  |  |
| Interfaces   | 8 x 1-GbE,<br>1 GbE Management,  | 4 x 2.5-GbE,<br>12 x 1-GbE,  | 4 x 1-GbE SFP,<br>12 x 1 GbE,                          | 4 x 1-GbE SFP,<br>12 x 1 GbE,   | 4 x 1-GbE SFP,<br>12 x 1 GbE.                     | 8 x 1-GbE SFP,<br>8 x 1 GbE,                      |  |
| interfaces   | 1 Console  | 1 GbE Management,  | 1 GbE Management,                                      | 1 GbE Management,   | 1 GbE Management,                                 | 1 GbE Managemen                                   |  |
|  | I Console  | 1 Console  | 1 Console  | 1 Console   | 1 Console   | 1 Console   |  |
|  |  | 1 Expansion Slot   |  |   |   | 1   |  |
| Evenneign  | 1 Expansion Slot   | (Rear)*,   |  | 1 Europaian Clat  | (Paar)* CD Card*                                  |   |  |
| Expansion  | (Rear)*, SD Card*  |  |  |   |   |   |  |
|  |  | module   |  |   |   |   |  |
| Management   |  | CLI, SSH, GUI, GMS   |  |   |   |   |  |
| SSO users  | 30,000   | 40,000   | 40,000   | 50,000  | 60,000  | 70,000  |  |
| Maximum access points supported  | 32   | 48   | 48   | 64  | 96  | 128   |  |
| Logging  | Analyzer, Local Log, Syslog  |  |  |   |   |   |  |
| Firewall/VPN Performance   | NSA 2600   | NSA 2650   | NSA 3600   | NSA 4600  | NSA 5600  | NSA 6600  |  |
| Firewall inspection throughput <sup>1</sup>  | 1.9 Gbps   | 3.0 Gbps   | 3.4 Gbps   | 6.0 Gbps  | 9.0 Gbps  | 12.0 Gbps   |  |
| Full DPI throughput <sup>2</sup>   | 300 Mbps   | 600 Mbps   | 500 Mbps   | 800 Mbps  | 1.6 Gbps  | 3.0 Gbps  |  |
| Application inspection throughput <sup>2</sup>   | 700 Mbps   | 1.4 Gbps   | 1.1 Gbps   | 2.0 Gbps  | 3.0 Gbps  | 4.5 Gbps  |  |
| IPS throughput <sup>2</sup>  | 700 Mbps   | 1.4 Gbps   | 1.1 Gbps   | 2.0 Gbps  | 3.0 Gbps  | 4.5 Gbps  |  |
| Anti-malware inspection throughput <sup>2</sup>  | 400 Mbps   | 600 Mbps   | 600 Mbps   | 1.1 Gbps  | 1.7 Gbps  | 3.0 Gbps  |  |
| IMIX throughput  | 600 Mbps   | 700 Mbps   | 900 Mbps   | 1.6 Gbps  | 2.4 Gbps  | 3.5 Gbps  |  |
| TLS/SSL Inspection and Decryption  | 000 10003  | 700 10003  | 700 10003  |   |   | 5.5 Gbps  |  |
| (DPI SSL) <sup>2</sup>   | 200 Mbps   | 300 Mbps   | 300 Mbps   | 500 Mbps  | 800 Mbps  | 1.3 Gbps  |  |
| VPN throughput <sup>3</sup>  | 1.1 Gbps   | 1.5 Gbps   | 1.5 Gbps   | 3.0 Gbps  | 4.5 Gbps  | 5.0 Gbps  |  |
| Connections per second   | 15,000/sec   | 15,000/sec   | 20,000/sec   | 40,000/sec  | 60,000/sec  | 90,000/sec  |  |
| Maximum connections (SPI)  | 500,000  | 1,000,000  | 750,000  | 1,000,000   | 1,500,000   | 1,500,000   |  |
| Maximum connections (SFI)<br>Maximum connections (DPI) <sup>4</sup>  |  |  |  |   |   |   |  |
|  | 250,000  | 500,000  | 375,000  | 500,000   | 1,000,000   | 1,000,000   |  |
| Default/Maximum connections (DPI SSL) <sup>4</sup>   | 1,000/1,000  | 12,000/13,500  | 2,000/2,750  | 3,000/4,500   | 4,000/8,500                                       | 6,000/10,500                                      |  |
| VPN  | NSA 2600   | NSA 2650   | NSA 3600   | NSA 4600  | NSA 5600  | NSA 6600  |  |
| Site-to-site tunnels   | 250  | 1,000  | 1,000  | 3,000   | 4,000   | 6,000   |  |
| IPSec VPN clients (max)  | 10 (250)   | 50 (1,000)   | 50 (1,000)   | 500 (3,000)   | 2,000 (4,000)                                     | 2,000 (6,000)                                     |  |
| SSL VPN NetExtender Clients (max)  | 2 (250)  | 2 (350)  | 2 (350)  | 2 (500)   | 2 (1000)  | 2 (1500)  |  |
| Encryption/Authentication  |  | DES, 3DE   | S, AES (128, 192, 256-bit)                             | /MD5, SHA-1, Suite B Cry  | ptography   |   |  |
| Key exchange   |  |  |  | iroups 1, 2, 5, 14v   |   |   |  |
| Route-based VPN  |  |  | RIP, (   | OSPF  |   |   |  |
| Networking   | NSA 2600   | NSA 2650   | NSA 3600   | NSA 4600  | NSA 5600  | NSA 6600  |  |
| IP address assignment  |  | Static (DHCP   | PPPoE, L2TP and PPTP cli                               | ient), Internal DHCP serve  | er, DHCP Relay                                    |   |  |
| NAT modes  | 1:1, many:1, 1:many, flexible NAT (overlapping IPS), PAT, transparent mode |  |  |   |   |   |  |
| VLAN interfaces  | 256  | 256  | 256  | 256   | 400   | 500   |  |
| Routing protocols  |  | BG   | GP, OSPF, RIPv1/v2, static                             | routes, policy-based rout   | ting  |   |  |
| QoS  |  | Bandwidth prior  | ity, max bandwidth, guar                               | anteed bandwidth, DSCF  | marking, 802.1p                                   |   |  |
| Authentication   | I DAP (multiple c  | lomains) XAUTH/RADIUS  | S SSO Novell internal us                               | er database. Terminal Se  | rvices Citrix Common A                            | ccess Card (CAC)                                  |  |
| VoIP   |  | LDAP (multiple domains), XAUTH/RADIUS, SSO, Novell, internal user database, Terminal Services, Citrix, Common Access Card (CAC)<br>Full H323-v1-5, SIP   |  |   |   |   |  |
| Standards  |  |  |  |   |   | 2   |  |
|  |  | TCP/IP, ICMP, HTTP, HTTPS, IPSec, ISAKMP/IKE, SNMP, DHCP, PPPoE, L2TP, PPTP, RADIUS, IEEE 802.3<br>ICSA Firewall, ICSA Anti-Virus, FIPS 140-2, Common Criteria NDPP (Firewall and IPS), UC APL |  |   |   |   |  |
| Certifications   |  | ICSA Firewall, ICSA A  | inti-virus, FIPS 140-2, Coi                            | mmon Criteria NDPP (Fire  | 1   | 11 01 1 0   |  |
| High availability  | Activo /Paccivo  | with State Sync  | Active/Passive   | with State Sync   |   | with State Sync,<br>I with State Sync,            |  |
|  | Active/Tassive   | with state sync  | Active/Activ   | ve Clustering   |   | e Clustering                                      |  |
| Hardware   | NSA 2600   | NSA 2650   | NSA 3600   | NSA 4600  | NSA 5600  | NSA 6600  |  |
|  |  | Dual, redundant  |  | I   | 1   |   |  |
| Power supply   | Single, Fixed 200W   | 120W (one included)  |  | Single, Fi  | xed 250W  |   |  |
|  |  |  |  |   |   | Dual, redundant,                                  |  |
| Fans   |  |  |  |   |   | hot swappable                                     |  |
|  | 100-240 VAC, 60-50 Hz  |  |  |   |   | appuble   |  |
| Input power  |  |  | 100-240 VA   |   | 90.9  | 112.1   |  |
|  | 40.4   | 74.0   | 74.0   |   |   | 113.1   |  |
| Maximum power consumption (W)  | 49.4   | 74.3   | 74.3   | 86.7  |   | 44  |  |
| Maximum power consumption (W)<br>MTBF @25°C in hours   | 176,540  | 146,789  | 146,789  | 139,783   | 134,900   | 116,477   |  |
| Maximum power consumption (W)<br>MTBF @25°C in hours<br>MTBF @25°C in years  |  |  | 146,789<br>16.76                                       | 139,783<br>15.96  |   | 116,477<br>13.30                                  |  |
| Maximum power consumption (W)<br>MTBF @25°C in hours<br>MTBF @25°C in years<br>Form factor   | 176,540  | 146,789  | 146,789<br>16.76<br>1U Rack N                          | 139,783<br>15.96<br>Mountable   | 134,900   |   |  |
| Maximum power consumption (W)<br>MTBF @25°C in hours<br>MTBF @25°C in years<br>Form factor<br>Dimension  | 176,540  | 146,789  | 146,789<br>16.76<br>1U Rack N                          | 139,783<br>15.96<br>Aountable<br>(4.5 x 48.5 x 43 cm)   | 134,900   |   |  |
| Maximum power consumption (W)<br>MTBF @25°C in hours<br>MTBF @25°C in years<br>Form factor<br>Dimension  | 176,540  | 146,789  | 146,789<br>16.76<br>1U Rack N                          | 139,783<br>15.96<br>Mountable   | 134,900   | 13.30   |  |
| Maximum power consumption (W)<br>MTBF @25°C in hours<br>MTBF @25°C in years<br>Form factor<br>Dimension<br>Weight  | 176,540<br>20.15   | 146,789<br>16.76   | 146,789<br>16.76<br>1U Rack N                          | 139,783<br>15.96<br>Aountable<br>(4.5 x 48.5 x 43 cm)   | 134,900   |   |  |
| Input power<br>Maximum power consumption (W)<br>MTBF @25°C in hours<br>MTBF @25°C in years<br>Form factor<br>Dimension<br>Weight<br>WEEE weight<br>Shipping weight | 176,540<br>20.15<br>10.1 lb (4.6 kg)                                       | 146,789<br>16.76<br>13.56 lb (6.15 kg)   | 146,789<br>16.76<br>1U Rack N                          | 139,783<br>15.96<br>Mountable<br>(4.5 x 48.5 x 43 cm)<br>13.56 lb (6.15 kg)   | 134,900   | 13.30<br>14.93 lb (6.77 kg)                       |  |
| Maximum power consumption (W)<br>MTBF @25°C in hours<br>MTBF @25°C in years<br>Form factor<br>Dimension<br>Weight<br>WEEE weight<br>Shipping weight                | 176,540<br>20.15<br>10.1 lb (4.6 kg)<br>11.0 lb (5.0 kg)                   | 146,789<br>16.76<br>13.56 lb (6.15 kg)<br>14.24 lb (6.46 kg)<br>20.79 lb (9.43 kg)   | 146,789<br>16.76<br>1U Rack N                          | 139,783<br>15.96<br>Mountable<br>(4.5 x 48.5 x 43 cm)<br>13.56 lb (6.15 kg)<br>14.24 lb (6.46 kg)<br>20.79lb (9.43 kg)  | 134,900<br>15.40                                  | 13.30<br>14.93 lb (6.77 kg)<br>19.78 lb (8.97 kg) |  |
| Maximum power consumption (W)<br>MTBF @25°C in hours<br>MTBF @25°C in years<br>Form factor<br>Dimension<br>Weight<br>WEEE weight<br>Shipping weight                | 176,540<br>20.15<br>10.1 lb (4.6 kg)<br>11.0 lb (5.0 kg)                   | 146,789<br>16.76<br>13.56 lb (6.15 kg)<br>14.24 lb (6.46 kg)<br>20.79 lb (9.43 kg)<br>FCC Class A, CE (EMC, I  | 146,789<br>16.76<br>1∪ Rack №<br>1.75 x 19.1 x 17 in   | 139,783<br>15.96<br>Mountable<br>(4.5 x 48.5 x 43 cm)<br>13.56 lb (6.15 kg)<br>14.24 lb (6.46 kg)<br>20.79lb (9.43 kg)<br>Class A, MSIP/KCC Class                         | 134,900<br>15.40<br>A, UL, cUL, TUV/GS, CB,       | 13.30<br>14.93 lb (6.77 kg)<br>19.78 lb (8.97 kg) |  |
| Maximum power consumption (W)<br>MTBF @25°C in hours<br>MTBF @25°C in years<br>Form factor<br>Dimension<br>Weight<br>WEEE weight                                   | 176,540<br>20.15<br>10.1 lb (4.6 kg)<br>11.0 lb (5.0 kg)                   | 146,789<br>16.76<br>13.56 lb (6.15 kg)<br>14.24 lb (6.46 kg)<br>20.79 lb (9.43 kg)<br>FCC Class A, CE (EMC, M  | 146,789<br>16.76<br>1U Rack N<br>1.75 x 19.1 x 17 in I | 139,783<br>15.96<br>Mountable<br>(4.5 x 48.5 x 43 cm)<br>13.56 lb (6.15 kg)<br>14.24 lb (6.46 kg)<br>20.79lb (9.43 kg)<br>Class A, MSIP/KCC Class<br>REACH, ANATEL, BSMI, | 134,900<br>15.40<br>A, UL, cUL, TUV/GS, CB,<br>CU | 13.30<br>14.93 lb (6.77 kg)<br>19.78 lb (8.97 kg) |  |

<sup>1</sup> Testing Methodologies: Maximum performance based on RFC 2544 (for firewall). Actual performance may vary depending on network conditions and activated services. <sup>2</sup> Full DPI/GatewayAV/Anti-Spyware/IPS throughput measured using industry standard Spirent WebAvalanche HTTP performance test and Ixia test tools. Testing done with multiple flows through <sup>1</sup> Who addways with the period and water the stated using industry standard spirent web valanche in the period market test and ixia test tools. Testing industry standard spirent web valanche in the period market test and ixia test tools. Testing industry standard spirent web valanche in the period market test and ixia test tools. Testing industry standard spirent web valanche in the period market test and ixia test tools. Testing industry standard spirent web valanche in the period market test and ixia test tools. Testing industry standard spirent web valanche in the period market test and ixia test tools. Testing industry standard spirent web valanche in the period market test and ixia test tools. Testing industry standard spirent web valanche in the period valanche is and ixia test tools. Testing industry standard spirent web valanche in the period valanche is interval.
<sup>3</sup> VPN throughput measured using industry standard spirent web valanche is interval.
<sup>4</sup> For every 125,000 DPI connections reduced, the number of available DPI SSL connections increases by 750.
\*Future use. All specifications, features and availability are subject to change.



# NSA series ordering information

| NSA 2650   | SKU                        |
|--|----------------------------|
| NSA 2650 TotalSecure Advanced Edition (1-year)   | 01-SSC-1988                |
| Advanced Gateway Security Suite – Capture ATP, Threat Prevention, Content Filtering and 24x7 Support for NSA 2650 (1-year)   | 01-SSC-1783                |
| Capture Advanced Threat Protection for NSA 2650 (1-year)   | 01-SSC-1935                |
| The Arevention–Intrusion Prevention, Gateway Anti-Virus, Gateway Anti-Spyware, Cloud Anti-Virus for NSA 2650 (1-year)  | 01-SSC-1976                |
| Silver 24x7 Support for NSA 2650 (1-year)  | 01-SSC-1541                |
| Content Filtering Service for NSA 2650 (1-year)  | 01-SSC-1970                |
| Enforced Client Anti-Virus & Anti-Spyware  | Based on user count        |
| Comprehensive Anti-Spam Service for NSA 2650 (1-year)  | 01-SSC-2001                |
| NSA 3600   | SKU                        |
| NSA 3600 TotalSecure Advanced Edition (1-year)   | 01-SSC-1713                |
| Advanced Gateway Security Suite – Capture ATP, Threat Prevention, Content Filtering and 24x7 Support for NSA 3600 (1-year)   | 01-SSC-1480                |
| Capture Advanced Threat Protection for NSA 3600 (1-year)   | 01-SSC-1485                |
| Threat Prevention–Intrusion Prevention, Gateway Anti-Virus, Gateway Anti-Spyware, Cloud Anti-Virus for NSA 3600 (1-year)   | 01-SSC-4435                |
| Silver 24x7 Support for NSA 3600 (1-year)  | 01-SSC-4302                |
| Content Filtering Service for NSA 3600 (1-year)  | 01-SSC-4441                |
| Enforced Client Anti-Virus & Anti-Spyware  | Based on user count        |
| Comprehensive Anti-Spam Service for NSA 3600 (1-year)  | 01-SSC-4447                |
| NSA 4600   | SKU                        |
| NSA 4600<br>NSA 4600 TotalSecure Advanced Edition (1-year)   | 01-SSC-1714                |
|  | 01-SSC-1714<br>01-SSC-1490 |
| Advanced Gateway Security Suite – Capture ATP, Threat Prevention, Content Filtering and 24x7 Support for NSA 4600 (1-year)<br>Capture Advanced Threat Protection for NSA 4600 (1-year) |                            |
|  | 01-SSC-1495                |
| Threat Prevention–Intrusion Prevention, Gateway Anti-Virus, Gateway Anti-Spyware, Cloud Anti-Virus for NSA 4600 (1-year)   | 01-SSC-4411                |
| Silver 24x7 Support for NSA 4600 (1-year)  | 01-SSC-4290                |
| Content Filtering Service for NSA 4600 (1-year)  | 01-SSC-4417                |
| Enforced Client Anti-Virus & Anti-Spyware  | Based on user count        |
| Comprehensive Anti-Spam Service for NSA 4600 (1-year)  | 01-SSC-4423                |
| NSA 5600   | SKU                        |
| NSA 5600 TotalSecure Advanced Edition (1-year)   | 01-SSC-1715                |
| Advanced Gateway Security Suite – Capture ATP, Threat Prevention, Content Filtering and 24x7 Support for NSA 5600 (1-year)   | 01-SSC-1550                |
| Capture Advanced Threat Protection for NSA 5600 (1-year)   | 01-SSC-1555                |
| Threat Prevention – Intrusion Prevention, Gateway Anti-Virus, Gateway Anti-Spyware, Cloud Anti-Virus for NSA 5600 (1-year)   | 01-SSC-4240                |
| Gold 24x7 Support for NSA 5600 (1-year)  | 01-SSC-4284                |
| Content Filtering Service for NSA 5600 (1-year)  | 01-SSC-4246                |
| Enforced Client Anti-Virus & Anti-Spyware  | Based on user count        |
| Comprehensive Anti-Spam Service for NSA 5600 (1-year)  | 01-SSC-4252                |
| NSA 6600   | SKU                        |
| NSA 6600 TotalSecure Advanced Edition (1-year)   | 01-SSC-1716                |
| Advanced Gateway Security Suite – Capture ATP, Threat Prevention, Content Filtering and 24x7 Support for NSA 6600 (1-year)   | 01-SSC-1560                |
| Capture Advanced Threat Protection for NSA 6600 (1-year)   | 01-SSC-1565                |
| Threat Prevention–Intrusion Prevention, Gateway Anti-Virus, Gateway Anti-Spyware, Cloud Anti-Virus for NSA 6600 (1-year)   | 01-SSC-4216                |
| Gold 24x7 Support for NSA 6600 (1-year)  | 01-SSC-4278                |
| Content Filtering Service for NSA 6600 (1-year)  | 01-SSC-4222                |
| Enforced Client Anti-Virus & Anti-Spyware  | Based on user count        |
| Comprehensive Anti-Spam Service for NSA 6600 (1-year)  | 01-SSC-4228                |
| Modules and accessories*   | SKU                        |
| 10GBASE-SR SFP+ Short Reach Module   | 01-SSC-9785                |
| 10GBASE-LR SFP+ Long Reach Module  | 01-SSC-9786                |
| 10GBASE SFP+ 1M Twinax Cable   | 01-SSC-9787                |
| 10GBASE SFP+ 3M Twinax Cable   | 01-SSC-9788                |
| 100BASE-SX SFP Short Haul Module   | 01-SSC-9789                |
|  |                            |
| 1000BASE-LX SFP Long Haul Module   | 01-SSC-9790                |
| 1000BASE-T SFP Copper Module   | 01-SSC-9791                |
| Management and reporting   | SKU                        |
| SonicWall GMS 10 Node Software License   | 01-SSC-3363                |
| SonicWall GMS E-Class 24x7 Software Support for 10 node (1-year)   | 01-SSC-6514                |

\*Please consult with your local SonicWall reseller for a complete list of supported SFP and SFP+ modules

# Regulatory model numbers:

NSA 2600–1RK29-0A9 NSA 2650-1RK38-0C8 NSA 3600–1RK26-0A2 NSA 4600–1RK26-0A3 NSA 5600–1RK26-0A4 NSA 6600–1RK27-0A5

# About Us

SonicWall has been fighting the cyber-criminal industry for over 25 years, defending small, medium size businesses and enterprises worldwide. Our combination of products and partners has enabled a real-time cyber defense solution tuned to the specific needs of the more than 500,000 global businesses in over 150 countries, so you can do more business with less fear.