

Project:	
Type:	
Catalog #:	

STANDARD



ILLUMINATION

- Two, 6V/12V 12W adjustable bi-pin halogen lamp heads.

ELECTRICAL

- Dual 120V/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V sealed lead acid, maintenance-free, rechargeable battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 26W standard on 50W models.

MOUNTING

- Conveniently designed for use with T-bar grid ceilings.
- Holes provided on enclosure for wire-suspension mount.


HOUSING

- Durable 20-gauge steel construction.
- White or black finish.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for two years.
- UL Listed for damp locations (20°C – 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

DIMENSIONS

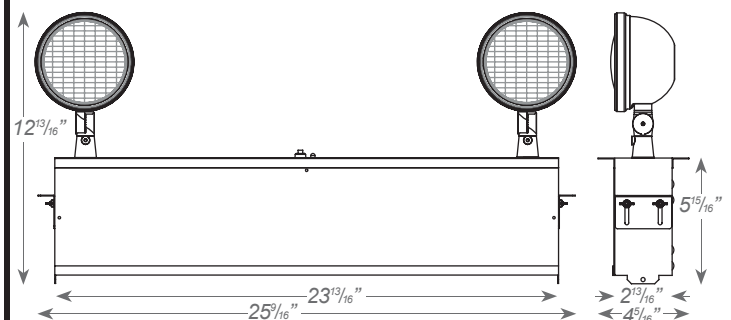

ORDERING INFORMATION

Sample Part Number: **CH-RM**

MODEL	VOLTAGE		WATTS (for 120 mins.)		HOUSING COLOR	
CH-RM	6	6V	27	27 ¹	(blank)	White
	12	12V	50	50	B	Black

Notes:

1. Available in 6V only

Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
CH-RM-627	11.0	11.0	0.11	0.04
CH-RM-650	18.0	18.0	0.17	0.07
CH-RH-1250	26.0	26.0	0.25	0.10

REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY												
			RHLED			RH16LED	RH16		RH		RHR		SRH		SRHLED
			3.6V	9.6V	MV		6V	12V	6V	12V	6V	12V	6V	12V	
CH-RM-650	6V	26W			X	X	X		X		X		X		X
CH-RM-1250	12V	26W			X	X		X		X		X		X	