



EXIT SIGN WAREHOUSE

The Most Energy Efficient Slim Profile Exit Sign Available

EXIT SIGN WAREHOUSE'S proprietary LEC (Light Emitting Capacitor) illumination technology uses a continuous layer of millions of microscopic encapsulated zinc sulfide photon emitting crystals. The LEC lighting technology is proven to provide all around superior performance. The EXIT SIGN WAREHOUSE Exit Sign's ongoing readability is due to the direct viewing of tiny solid state light sources which maintain their collective uniformity. Other lighting technologies, such as LED, rely on redirected light to provide uniform illumination which diminishes over time causing unbalanced light output resulting in an unreadable and unsafe exit sign.

FEATURES

» The New Standard for Energy Efficiency

- Consumes less than \$0.25 of electricity per year
- Less Than 1/4 Watt AC Energy Draw

» Unsurpassed Illumination Uniformity

- Uniformity is maintained throughout the 20+ year LEC lamp life by millions of microscopic light emitting crystals being viewed directly.

» Industry Leading Visibility Through Smoke

- High Tech Green Light - will not be mistaken as source of fire

» Brightest on Emergency Battery Power

- More than 25 % brighter
- Operating in excess of 2 Hours
- NiCad battery pack - 10 year life

» Maintenance Free Operation

- Lamp Life of 30+ years
- Solid state reliability

» Installs in Just Minutes

- Universal mount canopy included

» Slim Profile Housing

- Only 5/8" thick
- Available in White or Black
- Replaceable chevron covers

» Architectural Grade Housing

- Polycarbonate/ABS blend
- Meets UL 94-5VA rating
- Impact and scratch resistant

» 120/277 VAC

- Field selectable
- Voltage Surge Protected

» Industry Leading, 10 Year Warranty

EXIT SIGNS

www.exitsignwarehouse.com

818-707-3131



AC and Battery Back-up

EXIT SIGN WAREHOUSE EXIT Signs are available in Black or White Housings with high visibility 6 inch green letters. Signs are supplied for Top, Back or Side Mounting. Flush and Pendant mounting are also available.

Combo Sign

EXIT SIGN WAREHOUSE combines the slim profile EXIT Sign with a Two Head Emergency Light Unit. Black or White colors.



CODE & STANDARDS CONFORMITY

UL listed. Meets or exceeds UL 924, NFPA 101 Life Safety Code, NEC, OSHA and Energy Star standards.

WARRANTY

EXIT SIGN WAREHOUSE guarantees each product to be free from defects to the original purchaser for a period of 10 years from the date of purchase. If any component is found to be defective, EXIT SIGN WAREHOUSE will repair or replace the defective component at their option. The warranty does not cover damage caused by improper installation, misuse, abuse, improper environmental conditions, unauthorized modifications or shipping damage. Damage caused by explosions, water leaks, fire, war or acts of God are also not covered.

JOB INFORMATION	APPROVED BY	DATE



Exit Sign Lamp Panel

ILLUMINATION

Illumination is provided by the proprietary LEC panel that is made of millions of microscopic light emitting crystals that achieve unequaled uniformity and high visibility.

Luminance:

5 fL (foot lamberts) AC operation

7 fL (foot lamberts) Emergency DC power operation

Color: High Visibility Green

Voltage Ratings:

120 Volts, 60 Hz

120 VAC / 3.6 Volts DC

277 Volts, 60 Hz

277 VAC / 3.6 Volts DC

Power Ratings:

0.20 Watt @ 120 Volts, 60 Hz

0.20 Watt @ 277 Volts, 60 Hz

INPUT

120/277 VAC dual voltage input circuitry with surge protection built-in.

CONSTRUCTION

Precision molded housing and mounting canopy constructed of impact-resistant, UV stable, flame-retarding ABS alloy which resists scratching and denting. NFPA field selectable chevrons are provided. Available in Black and White standard finishes.

EMERGENCY OPERATION

A solid state smart-charge circuit is provided to increase battery life. The LEC lamp brightness is increased by about 25% and will operate for up to 2 hours on the battery system. Push to test switch and an LED test light AC indicator are provided for system testing.

BATTERY

Maintenance-free, sealed Nickel Cadmium (NiCd) or Nickel Metal Hydride (NiMH) battery packs provide an estimated service life of 10 years with an operating temperature range of 65° F to 85° F.

ORDERING INFORMATION


Description: Specifier Exit Sign, Single Sided, Battery Back-up, White Housing, Top Mounted -

Series	Faces	Power	Color	Mounting
Example: <input type="text"/>	<input type="text" value="0"/>	<input type="text" value="1"/>	<input type="text" value="1"/> -	<input type="text" value="TM"/>
	0 - Single 2 - Double	<u>120/277 VAC</u> 0 - AC Only 1 - AC w/ Battery Back-up	0 - Black 1 - White 2 - Designer	TM - Top Mount BM - Back Mount LS - Left Side RS - Right Side FM - Flush Mount (AC Only) UM - Universal Combo - Sign with 2 Head Emergency Light

www.exitsignwarehouse.com

818-887-1083

818-267-5590 (fax)

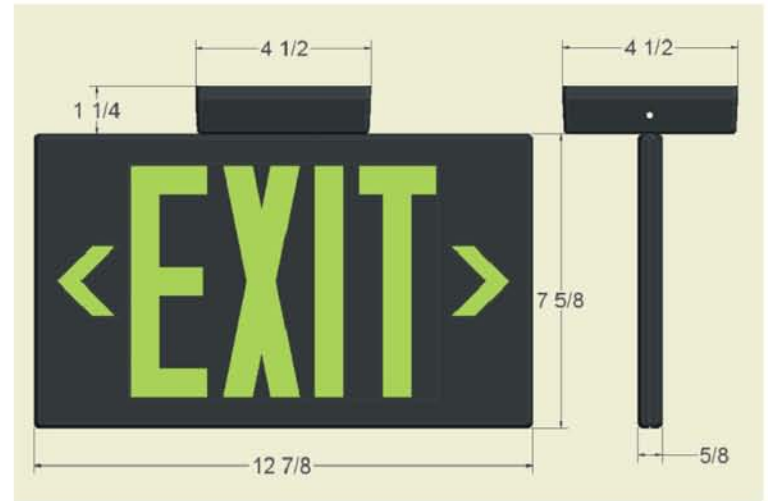

INSTALLATION

EXIT SIGN WAREHOUSE signs are factory configured Top/Ceiling Mount, Back Wall Mount and Right or Left Side Wall Mount and Flush Mount for easy field installation.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

Local Representative

