

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

**STANDARD**



**OPTIONAL**



**ILLUMINATION**

- Ultra-bright, energy efficient, long-life Red LED.
- UV-stabilized, ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.
- NY compliant 8" Exit letters.

**ELECTRICAL**

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

**MOUNTING**

- Compatible with drywall or drop ceiling mount installations. Bar hangers included.

**HOUSING**

- Premium-grade, extruded aluminum housing.
- Extruded Aluminum trim assembly is easily detachable from below, providing accessibility for service or maintenance, also available in black or white powder-coated finishes.
- Self-adhesive Chevron appliques and guide template provided for directional indication.




**OPTIONS**

- SDT: Self-diagnostic test feature performs monthly, biannually, and annually tests to ensure reliable operation and to meet electrical and life safety codes.

**WARRANTY/LISTING**

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations. (0°C – 50°C)

**DIMENSIONS**

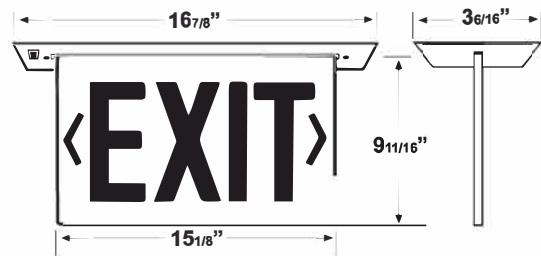

**ORDERING INFORMATION**

No. of faces	Letter	Panel	Housing	Battery	Options
1 Single Face	R Red	C Clear*	W White	Blank AC Only	SDT Self-diagnostics
2 Double Face		M Mirror	B Black	EM Battery Backup	
		W White	A Aluminum		

\*With single face only.